

# CENTRIFUGES

LOW SPEED CENTRIFUGES  
HIGH SPEED CENTRIFUGES  
LOW SPEED CENTRIFUGES, REFRIGERATED CENTRIFUGES  
HIGH SPEED CENTRIFUGES, REFRIGERATED CENTRIFUGES  
MINI CENTRIFUGES  
DEDICATED CENTRIFUGES  
CENTRIFUGE TUBE  
MULTI PURPOSE CENTRIFUGES  
CENTRIFUGAL CONCENTRATOR



Rev0(0425)

Rev0(0425)



Clinical Centrifuge, Low Speed

CFG-4.5D



Features:

- ◆ Quick spin function with press and hold pulse key.
- ◆ Lid with electric lock and automatic release function saves processing time.
- ◆ Automatic self-diagnosis on startup, showing accumulative running time and last running parameters.
- ◆ Braking time 2 steps adjustable.



Features:

- ◆ Easy programmin gto achieve high accuracy of speed control.
- ◆ Easy operation with intuitive menu and easy-to-read display.
- ◆ Rotor speed can be set and displayed by RPM or G-force.
- ◆ Maintenance-free brush-less DC motor.

Available rotors Cat. No.19400068 and Cat. No.19100197 are not interchangeable

Cat. No.19400068  
for CFG-4.5D &CFG-4D&CFG-4D-E  
Max Speed: 4500rpm  
Max RCF: 2490×g  
Rotor Capacity: 8x15ml,12x10ml  
Rotor Material: High strength plastic

Cat. No.19100197  
For CFG-4.5D(A6-50P)  
Max Speed: 4000rpm  
Max RCF: 1800×g  
Rotor Capacity: 50ml×6 or 15ml×6  
Rotor Material: High strength plastic

Specification

Model	CFG-4.5D
Speed Range	300-4500rpm, increment: 100rpm
Max RCF	2490×g
Speed Accuracy	±20rpm
Rotor Type	A12-10P, A6-50P
Run Time	30sec-99min HOLD (Continuous operation)
Motor	Brush-less DC motor
Display	LCD
Safety Devices	Door interlock; Over-speed detector; Automatic internal diagnosis
Acceleration/Braking time	A12-10P: 20s ↑ 13s ↓ A6-50P: 20s ↑ 20 s /90 s ↓
Power	Single-phase, 100V-240V,50Hz/60Hz, 3A 70W
Dimension(W×D×H)	354mm×304mm×215mm
Weight	6 kg
Advanced Features	Speed/RCF switch; Short-time run function; Sound-alert function
Package	Carton
Package Size	470mm*420mm*320mm
Gross Weight	9kg

Specifications

Available Tubesv	Tube Quantity	Dimension (Φ×L, mm)	Maximum Speed(rpm)	Radius (cm)	Maximum RCF (×g)
15ml con	8	17×120	4500	11	2490
1.5-5ml vacu	12	13×75	4500	9.8	2218
4-7 ml vacu	12	13×100	4500	11	2490
		16×75	2218		2218
8.5-10 ml vacu	12	16×107	4500	11	2490
2.7-3 ml (EU) collection tube	12	11×66	4500	9.8	2218
7.5-8.2 ml (EU) collection tube	12	15×92	4500	11	2490



Note: Made of plastic, Cat. No.19200921 rotor cannot be autoclaved or applied with UV irradiation. Regular sterilization is recommended.

# Low Speed Centrifuge

CFG-4AY



### Application

It is mainly used in laboratories of biology, medicine, chemistry, physics, etc. It is an ideal instrument for the analysis of serum, plasma, urine, radioimmunoassay, etc.

### Feature

- ◆ All-steel multi-layer explosion-proof structure, stainless steel centrifugal chamber.
- ◆ Maintenance-free DC brushless motor drive, smooth and quiet operation.
- ◆ Microcomputer processor precise control, digital display, easy operation, automatic calculation of centrifugal force RCF value, speed and centrifugal force can be switched with each other by one key.
- ◆ 10 acceleration rates and 10 deceleration rates for users to choose to achieve the best centrifugal effect.
- ◆ The mute electronic door lock is easy to use and has an emergency door opening function.
- ◆ Small size and low cover height, saving laboratory space.
- ◆ With door lock, over-speed, imbalance automatic protection, and fault self-diagnosis.

### Specification

Model	CFG-4AY
Max. Speed	4000rpm
Max. RCF	2390×g
Max. Capacity	6×50ml Angle rotor
Timer	1~99min
Speed Accuracy	±10rpm
Sound Emission	≤58dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	470*320*250mm
N.W./G.W.	16kg/18kg
Package Dimension	565*410*340mm

### Rotor Pictures



### Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05174	Angle rotor	4000rpm	12×10ml	2150×g	5-10ml blood collection tube
No.05177	Angle rotor	4000rpm	12×15ml	2150×g	5-15ml general purpose
No.05198	Angle rotor	4000rpm	12×20ml	2220×g	
No.05175	Angle rotor	4000rpm	18×10ml	2250×g	5-10ml blood collection tube
No.05179	Angle rotor	4000rpm	30×5ml	2250×g	2-4ml blood collection tube
No.05179	Angle rotor	4000rpm	30×7ml	2250×g	5-7ml blood collection tube
No.05180	Angle rotor	4000rpm	6×50ml	2100×g	
No.05176	Angle rotor	4000rpm	24×10ml	2200×g	5-10ml blood collection tube
No.05242	Swing rotor	4000rpm	6×10ml	2390×g	10ml blood collection tube

# Low Speed Centrifuge, Benchtop

CFG-4B








## Specification

Model	CFG-4B
Max speed	4200r/min
Max RCF	2760×g
Max capacity	20ml×12
Speed accuracy	± 30r/min
Time setting	1min~90min
Noise	<65dB(A)
Power supply	110V/60Hz 220V/50Hz
Dimension(L×W×H)	410mm×490mm×310mm
Package Dimension(W*D*H)(mm)	580*500*410
Net weight	22kg



## Accessories Center

<div>No.2</div> 		<div>5ml×2×8 Bucket</div> 
		<div>10ml×8 Bucket</div> 
Model	NO.2	
Max. speed	4200r/min	
Max. RCF	2760×g	
Adapters	0.5ml; 1.5ml	
	5ml/7ml Vacuum Tube	
Apply to 5ml/7ml Vacuum Tube		

<div>No.2</div> 		<div>50ml×4 Bucket</div> 
Model	NO.2	
Rotor capacity	50ml×4	
Max. speed	4200r/min	
Max. RCF	2760×g	
Adapters	1.5ml×2×4	
	5ml×4	
	10ml×4	
	15ml×4	
	20ml×4	
	5ml/7ml ×4 Vacuum Tube	

## Technical performance



- ◆ Microcomputer control, DC brushless motor, stable operation, Low noise and highs peed accuracy.
- ◆ Touch panel, programmable operation, operation data can be set according to demands and stored automatically.
- ◆ LED or LCD display, user-friendly interface, simple and convenient operations.
- ◆ The real-time conversation Of Speed and RCF is convenient for operation.
- ◆ Self-locking device, lid safety device, over-speed safety device, and automatic alarm device, etc.

<div>No.1</div> 		<div>No.1</div> 
Model	NO.1	NO.1
Rotor capacity	10ml×18	20ml×12
Max. speed	4000r/min	4000r/min
Max. RCF	2200×g	2200×g
Adapters	1.5ml	5ml
	5ml	10ml
	5ml/7ml Vacuum Tube	5ml/7ml Vacuum Tube
Optional	Aluminum Rotor	Aluminum Rotor
	Stainless Steel Tubes	Stainless Steel Tubes



# Low Speed Centrifuge, Benchtop

CFG-4B(W S) CFG-5B(W S)



## Description

- ◆ Microcomputer control, DC brushless motor, stable operation, low noise and high speed accuracy.
- ◆ The real-time conversation Of Speed and RCF is convenient for operation.
- ◆ Self-locking device, lid safety device, over-speed safety device, and automatic alarm device, etc.



LED or LCD display, user-friendly interface, simple and convenient operations.  
Touch panel, programmable operation, operation data can be set according to demand and stored automatically.

## Specifications

Model	CFG-4B (W S)	CFG-5B (W S)
Max speed	4000r/min	5000r/min
Max RCF	2500×g	4390×g
Max capacity	50ml×6	15ml ×32
Speed accuracy	± 30r/min	± 30r/min
Time setting	1min~99min	1min~99min
Noise	<60dB(A)	<65dB(A)
Power supply	110V/60Hz 220V/50Hz	110V/60Hz 220V/50Hz
Dimension(LxWxH)	330mm×420mm×280mm	460mm×540mm×340mm
Package Dimension(W*D*H)(mm)	530mm×440mm×400mm	450*600*680
Net weight	16kg	28kg

## Accessories Center

### CFG-4B(W S)

	NO.1 Capacity:7ml×12 Max Speed:4000r/min RCF:2220×g For 5ml/7ml Vacuum Tube		NO.1 Capacity: 7ml×18 Max Speed:4000r/min RCF:2220×g For 5ml/7ml Vacuum Tube		NO.1 Capacity:7ml×24 Max Speed:4000r/min RCF:2220×g For 5ml/7ml Vacuum Tube
	NO.1 Capacity:10ml/15ml×12 Max Speed:4000r/min RCF:2220×g Adapter: 1.5ml、 5ml/7ml Vacuum Tube		NO.1 Capacity:10ml×18 Max Speed:4000r/min RCF:2220×g Adapter: 1.5ml、 5ml/7ml Vacuum Tube		NO.1 Capacity:10ml×24 Max Speed:4000r/min RCF:2220×g Adapter: 1.5ml、 5ml/7ml Vacuum Tube
	NO.1 Capacity:20ml×12 Max Speed:4000r/min RCF:2220×g Adapter: 5ml、10ml、5ml/7ml Vacuum Tube		NO.1 Capacity:50ml×4 Max Speed:4000r/min RCF:2220×g Adapter:15ml、20ml、5ml/7ml Vacuum Tube		
	NO.2 Capacity:15ml×8 Max Speed:4000r/min RCF:2220×g Adapter:1.5ml、 5ml、 10ml、 5ml/7ml Vacuum Tube		NO.3 Capacity:50ml×4 Max Speed:4000r/min RCF:2500×g		

### CFG-5B(W S)

 No.1 Rotor Capacity: 50mlx4 Max Speed: 5000r/min Max RCF: 4390xg	 50mlx4 Bucket	Adapter: 1.5mlx2x4	Adapter: 5ml/7mlx4 Vacuum Tube	Adapter: 5mlx4
		Adapter: 10mlx4	Adapter: 15mlx4	Adapter: 20mlx4
 No.2 Rotor Capacity: 50mlx8 Max Speed: 4000r/min Max RCF: 2810xg	 50mlx2x4 Bucket	Adapter: 1.5mlx2x8	Adapter: 5ml/7mlx8 Vacuum Tube	Adapter: 5mlx8
		Adapter: 10mlx8	Adapter: 15mlx8	Adapter: 20mlx8
 No.3 Max Speed: 4000r/min Max RCF: 2810xg	 15mlx4x4 Bucket	Adapter: 1.5ml	Adapter: 5ml、 10ml	Adapter: 5ml/7m Vacuum Tube
	 15mlx6x4 Bucket	Adapter: 1.5ml	Adapter: 5ml、 10ml	Adapter: 5ml/7m Vacuum Tube
	 15mlx8x4 Bucket	Adapter: 1.5ml	Adapter: 5ml、 10ml	Adapter: 5ml/7m Vacuum Tube
 No.4 Rotor Capacity: 7mlx48 Max Speed: 4000r/min Max RCF: 2810xg	 7mlx12x4 Bucket	No.5  Rotor Capacity: 8x96 well Max Speed: 4000r/min Max RCF: 2200xg		
		 8x96 well Microplate		

# Low Speed Centrifuge, Automatic Balance

CFG-4BA



## Specification

Model	CFG-4BA
Max. Speed	4000r/min
Max. RCF	2200×g
Max.Capacity	6×50ml
Time Setting	0~99min
Motor	Brushless DC motor, microcomputer control
Power Supply	AC 220V 50Hz 3A
Dimensions(L×D×H)	430×340×250mm
Net Weight	20kg

## Advantages

- ◆ **Drive:** Brushless DC motor drive, maintenance-free, high torque, fast lifting speed, special combination shock absorption device to make the motor run smoothly, with small vibration, low noise, and meet environmental protection requirements.
- ◆ **Display:** Intelligent control, touch panel, intuitive digital display.
- ◆ **Machine body:** It adopts high-quality steel structure and stainless steel centrifugal chamber.
- ◆ **Security:** It adopts silent motor, integrated electronic lock. It has multiple protection functions such as door cover, over-speed, imbalance, etc. It is equipped with electronic door lock to ensure safe and reliable operation.
- ◆ **Application:** Suitable for biochemical laboratory, hospital clinical test, etc.

## Angle Rotor



24×10ml(4000r/min)  
RCF:2200×g



6×50ml(4000r/min)  
RCF:2200×g



12×10/15ml(4000r/min)  
RCF:2200×g



18×10ml(4000r/min)  
RCF:2200×g

Clinical Centrifuge, Low Speed

CFG-4D    CFG-4D-E



CFG-4D-E Features:

- ◆ Speed range of 300-4000rpm.
- ◆ 3 programs storage capacity for routine applications
- ◆ Automatic internal diagnosis.
- ◆ Maintenance free brushless DC motor.




CFG-4D-E



CFG-4D

CFG-4D Features:

- ◆ Max.speed 4000rpm.
- ◆ Rotor speed can be set in RPM/RCF, with 3 programs storage capacity for routine applications.
- ◆ Max. capacity 50ml×4, Accomo dating different sizes of blood collection tubes and centrifuge tubes suitable for swing rotor and angle rotor.
- ◆ Automatic internal diagnosis and self-detection.
- ◆ Maintenance-free brushless DC motor.

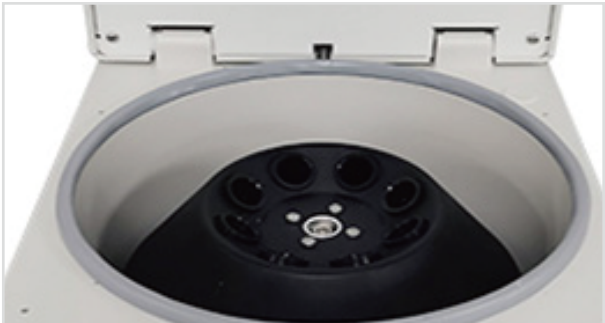


Specifications

Model	CFG-4D	CFG-4D-E
Speed range	500-4000rpm increment: 100rpm	300-4000rpm increment: 100rpm
Max. RCF	2500×g	1900×g
Speed accuracy	±100rpm	±100rpm
Rotor	Swing6×15ml    Swing4×50ml Angle 24×15 ml, Angle 12×10ml/8×15ml	Angel 8×15ml(Default), Angel 10ml×12
Run time	1-99min, HOLD	1-99min, HOLD
Motor	Brushless DC motor	Brushless DC motor
Display	LCD	LED
Program	Blood: 3200rpm,10min. Urine: 1800rpm,5min. Faecal: 1300rpm,10min.	Blood: 3200rpm, 10min Urine: 1800rpm,5min Faecal: 1300rpm, 10min
Safety Device	Automatic internal diagnosis	Automatic internal diagnosis
Acceleration/deceleration	3 ↑ 4 ↓ steps	25s ↑ 35s ↓
Power	Single phase, 100V-240V, 50Hz/60Hz	Single phase, 100V-240V, 50Hz/60Hz
Dimension(W×D×H)	364×440×268mm	286×367×227mm
Weight	14.5kg	9.2kg
Noise	≤62dB(A)	≤60dB(A)






Available adapters




Cat. No.19500024

50ml change 15ml adapter,  
Adapted to 17×120mm centrifuge tube, 13/16×100mm blood collection tube 4pcs/pk,for CAT. NO. 19400100




CAT. NO. 19500021

15ml adapter for 17×120mm centrifuge tube, 13/16×100mm blood collection tube 24 pcs/pk, for CAT. NO. 19400082, CAT. NO. 19400101, CAT. NO. 19400084



CAT. NO. 19500022

5ml adapter, Adapted to 13×75mm blood collection tube 24 pcs/pk, for CAT. NO. 19400100, CAT. NO. 19400082, CAT. NO. 19400101



CAT. NO. 19500023(Optional)

1.5/2ml Cryogenic Vials/ centrifuge tube adapter, 24 pcs/pk, for CAT. NO. 19400100, CAT. NO. 19400082, CAT. NO. 19400101, CAT. NO. 19200921, A6-50P

Available rotors



Rotors Model	Cat. No.19400082	Cat. No.19400100	Cat. No.19400101	Cat. No.19400084	Cat. No.19200921
Centrifuge model	CFG-4D	CFG-4D	CFG-4D	CFG-4D&CFG-4D-E	CFG-4D/CFG-4D-E
Capacity	15ml×6	50ml×4	15ml×24	15ml×8	DM0412/DM0412S
Hole diameter(mm)	22	29.4	22	22.6	15ml×8 , 10ml×2
Hole Depth(mm)	97.7	87.8	97.7	90.8	-
Max. tube Height (mm)	120.6	125	120.6	120.3	-
Max. speed(rpm)	4000	4000	4000	4000	-
Rotor material	Aluminum alloy	Aluminum alloy	High strength plastic	High strength plastic	High strength plastic
Default adaptor	CAT. NO. 19500021, CAT. NO. 19500022	CAT. NO. 19500024, CAT. NO. 19500022	CAT. NO. 19500021, CAT. NO. 19500022	CAT. NO. 19500021	Cat. No. 19200921

# Low Speed Centrifuge, Economical Type

CFG-4R



- Max. Speed:4000rpm
- Capacity:6x20ml
- Max.RCF:1790×g
- Timing Range:0-60 mins



## Features



The lower speed centrifugal machine with the max.speed 4000r/min.



For radioimmunoassay and isolation of cells and large particles.



With stainless steel inner tank, good quality and safer



Adjustable timing and speed.



Has the characteristics of small size, light weight, low noise, beautiful appearance and so on.

## Description

- Low Speed Centrifuges are widely used in the laboratory or produce department for organisms, medical, chemistry etc. They are suitable for qualitative analysis in hospital laboratories, clinics, biochemical laboratories, biological product laboratories, and for plasma, serum, urea and vaccine manufacturing.

## Specification

Model	CFG-4R
Max. Speed	4000rpm
Capacity	6x20ml
Max.RCF	1790×g
Timing Range	0-60 mins
Electricity	220V/50Hz
Dimensions(W*D*H)	245*245*230mm
Weight	3.6Kg



# Low Speed Centrifuge, Economical Type

CFG-4ZA



### Description

- ◆ Strong plastic case with metal lid
- ◆ With mechanical door lock
- ◆ With safety switch. Stop working when open the door
- ◆ Scope of supply includes the rotor
- ◆ High speed for short centrifugation timers
- ◆ Small footprint
- ◆ LED display speed. Stepless speed adjustment



### Specification

Model	CFG-4ZA
Max RPM	4000 RPM, LED display speed
Max RCF	2325xg
Timer	0-30min
Rotor capacity	20mlx12 (standard)
Voltage	110V60Hz/220V50Hz
Dimension	280x310x265mm
Package	340x350x330mm
G.W./N.W.	10/9kg

Rotor NO.	Rotor capacity	Max RCF
A042012 (standard)	20mlx12	2325xg
A042006	20mlx6	1790xg
A042008	20mlx8	2325xg
A040518	5mlx18	2325xg
A041012	10mlx12	2325xg
<b>Note:</b> The above capacity only refers to the sleeve capacity and not the centrifuge tube capacity. Please provide centrifuge tube size when selecting.		

# Low Speed Centrifuge, Economical Type

CFG-4ZB



### Description

- ◆ Strong Plastic case with metal lid
- ◆ With safety switch. Stop working when open the door
- ◆ Pointer show speed
- ◆ Stepless speed adjustment
- ◆ Mechanical timer
- ◆ Scope of supply includes the rotor
- ◆ High speed for short centrifugation timers



### Specification

Model	CFG-4ZB
Max RPM	4000 RPM, Pointer show speed
Max RCF	2325xg
Timer	0-30min
Rotor capacity	20mlx12 (standard)
Voltage	110V60Hz/220V50Hz
Dimension	280x310x265mm
Package	340x350x330mm
G.W./N.W.	10/9kg

Rotor NO.	Rotor capacity	Max RCF
A042012 (standard)	20mlx12	2325xg
A042006	20mlx6	1790xg
A042008	20mlx8	2325xg
A040518	5mlx18	2325xg
A041012	10mlx12	2325xg
<b>Note:</b> The above capacity only refers to the sleeve capacity and not the centrifuge tube capacity. Please provide centrifuge tube size when selecting.		

# Low Speed Centrifuge, Economical Type

CFG-4ZBP



### Description

- ◆ High strength plastic shelf, simple structure and simple operation.
- ◆ With mechanical door lock and safety switch,stop working when open the door.
- ◆ Pointer show speed, stepless speed adjustment
- ◆ Viewing area can view the running statement.



### Specification

Model	CFG-4ZBP
Max RPM	4000 RPM
Max RCF	2325xg
Timer	0-30min
Rotor capacity	20mlx12 (Standard)
Voltage	110V60Hz/220V50Hz
Dimension	320x340x280mm
Package	410x430x350mm
G.W./N.W.	9/8kg

Rotor NO.	Rotor capacity	Max RCF
A042012	20mlx12	2325xg
A042008	20mlx8	2325xg
A040518	5mlx18	2325xg
A041012	10mlx12	2325xg
A042006	20mlx6	1790xg
<b>Note:</b> The above capacity only refers to the sleeve capacity and not the centrifuge tube capacity. Please provide centrifuge tube size when selecting.		

# Low Speed Centrifuge, Economical Type

CFG-4ZC



### Description

- ◆ Strong plastic case with metal lid
- ◆ High brushless motor,with mechanical door lock
- ◆ Over speed and imbalance protection
- ◆ With safety switch,stop working when open the door
- ◆ Stepless speed adjustment, LED display speed and timer
- ◆ Error code display, speed up and down adjustment



### Specification

Model	CFG-4ZC
Max RPM	4000 RPM
Max RCF	2325xg
Timer	0-99min
Rotor capacity	20mlx12(standard)
Voltage	110V 60Hz / 220V 50Hz
Dimension	280x310x265mm
Package Dimension (W*D*H) (mm)	360x360x380mm
G.W./N.W.	10/9kg

Rotor NO.	Rotor capacity	Max RCF
A042012 (standard)	20mlx12	2325xg
A042006	20mlx6	1790xg
A042008	20mlx8	2325xg
A040518	5mlx18	2325xg
A041012	10mlx12	2325xg
A040512	5ml eppendorf tube x12	1790xg
A040812	8mlx12	2325xg
<b>Note:</b> The above capacity only refers to the sleeve capacity and not the centrifuge tube capacity. Please provide centrifuge tube size when selecting.		

# Low Speed Centrifuge, Economical Type

CFG-4ZCP



### Description

- ◆ High strength plastic lid, small volume,light weight
- ◆ Brush-less motor drive
- ◆ Error code, speed acceleration/deceleration rates 10 programs
- ◆ Advanced wide voltage design, RPM is not affected by voltage fluctuation, high precision
- ◆ Over speed alarm, finish alarm



Large screen backlight LCD shows speed/running time acceleration/deceleration  
RCF/RPM toggle key, review the RCF at any time  
Mechanical door lock and safety switch, it will stop if open the door.

### Specification

Model	CFG-4ZCP
Max RPM	4000 RPM
Max RCF	2325xg
Timer	0-99min
Rotor capacity	20mlx12 (Standard)
Voltage	100-240V 50-60HZ
Dimension	320x340x280mm
Package	410x430x350mm
G.W./N.W.	8/7kg

Rotor NO.	Rotor capacity	Max RCF
A042012	20mlx12	2325xg
A042008	20mlx8	2325xg
A040518	5mlx18	2325xg
A041012	10mlx12	2325xg
A042006	20mlx6	1790xg
A040812	8mlx12	2325xg
<b>Note:</b> The above capacity only refers to the sleeve capacity and not the centrifuge tube capacity. Please provide centrifuge tube size when selecting.		

# Low Speed Centrifuge, Economical Type

CFG-4ZL



### Description

- ◆ Strong plastic case
- ◆ Over speed alarm and imbalance protection
- ◆ Error code display, Accel /Decel rates adjustment
- ◆ Suit for qualitative analysis of blood serum and plasma
- ◆ Equipped with emergency locking device



Brushless motor, LCD display speed, RCF and timer  
Touch panel control, automatic stop once lid open  
Electronic door lock

### Specification

Model	CFG-4ZL
Max RPM	4000 RPM
Max RCF	2325xg
Timer	0-99min
Rotor capacity	20mlx12(standard)
Voltage	110V 60Hz/220V 50Hz
Dimension	320x340x280mm
Package	410x430x350mm
G.W./N.W.	11/10kg

Rotor NO.	Rotor capacity	Max RCF
A042012 (standard)	20mlx12	2325xg
A042006	20mlx6	1790xg
A042008	20mlx8	2325xg
A040518	5mlx18	2325xg
A041012	10mlx12	2325xg
A040512	5ml eppendorf tube x12	1790xg
A040812	8mlx12	2325xg
<b>Note:</b> The above capacity only refers to the sleeve capacity and not the centrifuge tube capacity. Please provide centrifuge tube size when selecting.		

# Low Speed Centrifuge, Economical Type

CFG-4ZN



### Description

- ◆ With safety switch
- ◆ Scope of supply includes the rotor
- ◆ High speed for short centrifugation timers
- ◆ Small footprint
- ◆ Simple to operate
- ◆ Step speed adjustment
- ◆ Classical metal case



### Specification

Model	CFG-4ZN
Max RPM	4000RPM
Max RCF	1790xg
Rotor capacity	20mlx6
Voltage	110V60Hz/220V50Hz
Dimension	φ250×220 mm
Package Dimension (W*D*H)	310*310*290mm
G.W./N.W.	4/3kg

# Low Speed Centrifuge, Economical Type

CFG-4ZS



### Description

- ◆ Safety switch
- ◆ Scope of supply includes the rotor
- ◆ High speed for short centrifugation timers
- ◆ Small footprint
- ◆ Simple to operate
- ◆ Step speed adjustment
- ◆ Classical metal case



### Specification

Model	CFG-4ZS
Max RPM	4000 RPM
Max RCF	2325xg
Timer	0-30min
Rotor capacity	20mlx12 (standard)
Voltage	110V60Hz/220V50Hz
Dimension	280x300x240mm
Package	340x370x290mm
G.W./N.W.	10/9kg

Rotor NO.	Rotor capacity	Max RCF
A042012(standard)	20mlx12	2325xg
A042006	20mlx6	1790xg
A041508	15mlx8	2325xg
A045006	50mlx6	2800xg
<b>Note:</b> The above capacity only refers to the sleeve capacity and not the centrifuge tube capacity. Please provide centrifuge tube size when selecting.		



# Low Speed Centrifuge, Benchtop

CFG-5B



## Description

This series of centrifuge separation technology is a new technology developed according to the state of particles in a practical centrifugal occasion; It is suitable for experiments and scientific research in the fields of biochemistry, hospital clinical testing, etc.



**Drive:**  
Brushless DC motor drive, maintenance-free, high torque, fast lifting speed, special combination of shock absorption device to make the motor run smoothly.

## Specification

Model	CFG-5B
Max. Speed	5000r/min
Max. RCF	4020×g
Max.Capacity	6×50ml
Speed Accuracy	±30r/min
Time Setting	0~99min
Noise	≤58dB
Motor	Brushless DC motor, microcomputer control
Power Supply	AC 220V 50Hz 8A
Dimensions(L×D×H)	430×340×250mm
Weight	16kg
Package Dimension	540*460*360
G.W.(kg)	18.5

## Advantages



- ◆ **Display:**  
Intelligent control, touch panel, intuitive digital display, operating parameters can be automatically memorized, and RCF can be set directly.
- ◆ **Control:**  
Parameters such as speed and time can be set directly, which is convenient to use.



- ◆ **Machine body:**  
Themachinebody adopts high-quality steel structure, stainless steel centrifugal chamber, durable and easy to clean.
- ◆ **Security:**  
It has multiple protection functions such as door cover, overspeed and unbalance to ensure safe and reliable operation.

## Available rotor and centrifuge tube

Rotor NO.	Max. Capacity	Max. Speed	Max. RCF	Dimension of Centrifuge Tube
Angle Rotor	12×20ml	5000r/min	4020×g	-
Angle Rotor	6×50ml	5000r/min	4020×g	-
Angle Rotor	24×10ml	5000r/min	4020×g	-
NO.42Angle rotor	12×15ml	5000r/min	4020×g	Φ 28×105-115



# Low Speed Centrifuge, Economical Type

CFG-5B(BD)

EAC CE



## Technical performance

- ◆ Elegant shape, ABS housing, long service life and easy to clean
- ◆ The machine can stop running with the lid open This can ensure a safe running
- ◆ It runs quietly and stably.
- ◆ The speed and time can be set according to demands
- ◆ The data of the last operation can be stored.



## Application

low speed centrifuge is used in laboratory, hospitals, colleges and universities.



## Specification

Model	CFG-5B(BD)
Max Speed	4000r/min
Max RCF	1790xg
Rotor Capacity	15mlx6(Non replaceable)
Speed	± 30r/min
Time Setting	1min-60min
Noise	< 60dB(A)
Power Supply	110V/60HZ, 220V/50HZ
Dimension(LxWxH)	270mmx270mmx240mm
Package Dimension(W*D*H)(mm)	350mmx350mmx300mm
Net Weight	5kg

# Low Speed Centrifuge, Benchtop

CFG-5B-A



Features:

- ◆ Microcomputer control, DC brushless motor, stable operation, low noise and high speed accuracy.
- ◆ The real-time conversation Of Speed and RCF is convenient for operation.
- ◆ It has self-locking device, lid safety device, over-speed safety device, and automatic alarm device, etc.



LED or LCD display, user-friendly interface, simple and convenient operations.

Touch panel, programmable operation, operation data can be set according to demand and stored automatically.

Specification

Model	CFG-5B-A
Max speed	5000r/min
Max RCF	4390×g
Max capacity	15ml×36
Speed accuracy	± 30r/min
Time setting	1min~99min
Noise	<65dB(A)
Power supply	110V/60Hz 220V/50Hz
Dimension(L*W*H)	460mm×540mm×340mm
Package Dimension(W*D*H)(mm)	670mm×600mm×450mm
Net weight	28kg

Accessories Center

Model	NO.5 NO.5
Rotor capacity	10ml×12 50ml×8
Max. speed	5000r/min 5000r/min
Max. RCF	3500×g 3500×g
Adapters	1.5ml, 5ml 15ml, 20ml

Model	NO.2
Rotor capacity	50ml×4
Max. speed	5000r/min
Max. RCF	4390×g
Adapters	1.5ml×2×4
	5ml/7ml ×4 Vacuum Tube
	5ml×4
	10ml×4
	15ml×4
	20ml×4

		Adapters: 1.5ml×2 5ml/7ml Vacuum Tube 5ml,10ml 15ml,20ml		Adapters: 1.5ml 5ml/7ml Vacuum Tube 5ml,10ml
		Adapters: 1.5ml 5ml/7ml Vacuum Tube 5ml,10ml		Adapters: 1.5ml 5ml/7ml Vacuum Tube 5ml,10ml

	Rotor capacity:8×96 well Max. speed:4000r/min Max. RCF:2200×g		8×96 well Microplate
--	---	--	----------------------

		7ml×12×4 Bucket		15ml×6×4 Bucket		15ml×9×4 Bucket
		50ml×4 Bucket		50ml×2×4 Bucket		100ml×4 Bucket

Low Speed Centrifuge, Benchtop

CFG-5BL




Description

It is suitable for separation of biological, chemical, pharmaceutical, biological products and other different liquids.

Advantages

- ◆ 5-inch high-definition touch screen, easy to operate and intuitive display;
- ◆ 15 groups of programs can be stored for users to use;
- ◆ There are various protections such as overspeed, door protection, imbalance protection, etc. to ensure the safety of human and machine;
- ◆ Automatically identify 4 different rotors to eliminate potential safety hazards caused by user misoperation (Optional function)
- ◆ It has 9 files of acceleration and 10 files of deceleration level, which can effectively prevent secondary suspension and have a good centrifugal effect;
- ◆ AC variable frequency motor, high speed control precision
- ◆ Unique two-stage shock absorption; large-capacity rotor has little vibration during operation, runs smoothly, and increases the service life of the instrument;
- ◆ Special air duct, continuous working temperature rise is less than 10 °C at room temperature of 26-28 °C ;

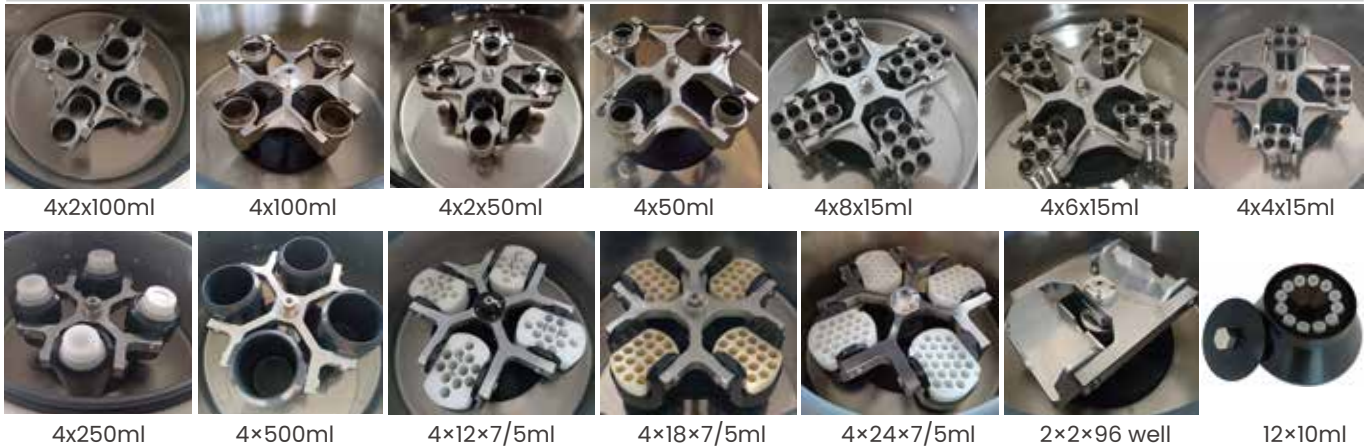

Rotor

NO.	Max speed (r/min)	Max RCF (×g)	Rotor Type	Capacity	Dimension of TestTube (mm)
NO.1	4000	2810	Swing Rotor	4x2x100ml (It can be equipped with adapter)	Φ37.5×123
	4000	2810		4x100ml (It can be equipped with adapter)	Φ37.5×123
	4000	2810		4x2x50ml	Φ29×107
	4000	2810		4x50ml	Φ29×107
	4000	2810		4x8x15ml	Φ17×118
				4x6x15ml	Φ17×118
				4x4x15ml	Φ17×118
NO.2	4200	3500		4x250ml	Φ62×110
NO.3	4000	3040		4×500ml	Φ80×137
NO.4	4000	2800		4×12×7/5ml	Φ13×110
NO.5	4000	2800	4×18×7/5ml	Φ13×110	
NO.6	4000	2800	4×24×7/5ml	Φ13×110	
NO.7	4000	2000	Microplate Rotor	2×2×96 well plate	Microplate
NO.8	6000	4390	Angle rotor	12×10ml	Φ16×83

Specification

Model		CFG-5BL
Max. Speed		6000r/min
Max. RCF		3800×g
Max.Capacity		4×500mL
Motor		AC frequency conversion motor
Speed Accuracy		±30r/min
Time Setting	Timed centrifugation	1min~99 min59sec
	Continuous centrifugation	Hold
Power Supply		AC220±22V 50/60Hz 10A
Noise		≤60dB(A)
Dimensions(L×D×H)		458mm×620mm×380mm
Net Weight		55kg



# Low Speed Centrifuge

CFG-5BSY




## Application

It is mainly used in laboratories of biology, medicine, chemistry, physics, etc. It is an ideal instrument for the analysis of serum, plasma, urine, radioimmunoassay, etc.

## Specification

Model	CFG-5BSY
Max. Speed	5000rpm
Max. RCF	4730×g
Max. Capacity	4×800ml Swing rotor
Timer	1s ~ 99h59min59s
Speed Accuracy	±10rpm
Sound Emission	≤65dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	680*500*385mm
N.W./G.W.	67kg/90kg
Package Dimension	880*580*560mm

## Rotor Pictures

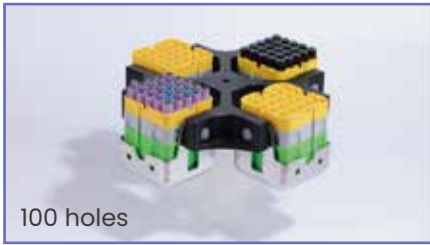

## Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, the high-definition touch screen "Intelligent System" version displays both setting parameters and real-time parameters: Speed, RCF, Time, Acceleration/Deceleration gear, Rotor No., Door cover status, etc.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple.
- ◆ Aero forged aluminum rotors (except multi-tube frame rotors) and various Teflon adapters are available.
- ◆ Can store and call 100 sets of programs, with 9 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.
- ◆ Optional: Automatic recognition of rotor magnetism to avoid misoperation and over-speed operation.

CFG-5BSY Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05254	Swing Rotor	4000rpm	4×25×5/7ml	3360×g	For 2-7ml vacuum tube
No.05207	Swing Rotor	4000rpm	4×800ml(round)	3450×g	Optional biosafety cover
	Adapter		4×500ml(falcon)		500ml falcon
	Adapter		4×250ml(falcon)		250ml falcon
	Adapter		4×24×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×19×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×14×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No.05608	Swing Rotor	4000rpm	4×500ml(round)	3530×g	Optional biosafety cover
	Adapter		4×18×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×14×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×9×10/15ml		For 10/15ml tube
	Adapter		4×3×50ml		For 50ml tube
No.05609	Swing Rotor	4000rpm	4×500ml(rectangle)	3450×g	Optional biosafety cover
	Adapter		4×20×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×16×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×12×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No.05611	Swing Rotor	4000rpm	4×4×96 well	2940×g	Optional
No.05610			4×7×50ml	3470×g	For 50ml falcon tube
No.05213	Swing Rotor	4000rpm	2×5×96 well	3210×g	Optional
No.05629	Swing Rotor	5000rpm	4×1×50ml	4730×g	Optional
No.05630			4×1×100ml	4730×g	Optional
No.05635		4000rpm	4×2×100ml	3200×g	Optional
No.05634			4×2×50ml	3200×g	Optional
No.05631			4×8×15ml	3200×g	For 5-15ml tube
No.05639			4×16×5ml vacuum tube	2530×g	For 2ml vacuum tube
No.05638			4×16×7ml vacuum tube	2890×g	For 5ml vacuum tube
No.05640			4×12×10ml vacuum tube	2880×g	For 10ml vacuum tube
No.05614		4000rpm	4×30×7ml vacuum tube	3160×g	For 5ml vacuum tube
No.05615			4×40×7ml vacuum tube	3270×g	For 5ml vacuum tube
No.05618			4×28×10m vacuum tube	3270×g	For 10ml vacuum tube
No.05237	Swing Rotor	4000rpm	4×Pasteur milk bottle	3830×g	Pasteur milk bottle
No.05183	Angle Rotor	2000rpm	16×Gabor milk fat meter	896×g	For Gabor milk fat meter
No.05141	Angle Rotor	5000rpm	30×15ml	3830×g	Optional
No.05144	Angle Rotor	5000rpm	12×50ml	3860×g	Optional
No.05145	Angle Rotor	4000rpm	24×50ml	2970×g	Optional
No.05147	Angle Rotor	5000rpm	6×100ml	3130×g	Optional
No.05148	Angle Rotor	4000rpm	12×100ml	2970×g	Optional

Low Speed Centrifuge



CFG-5BY



Application

It is mainly used in laboratories of biology, medicine, chemistry, physics, etc. It is an ideal instrument for the analysis of serum, plasma, urine, radioimmunoassay, etc.

Rotor Pictures





Specification

Model	CFG-5BY
Max. Speed	5000rpm
Max. RCF	4730×g
Max. Capacity	4×800ml Swing rotor
Timer	1s ~ 99min
Speed Accuracy	±10rpm
Sound Emission	≤65dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	680*500*385mm
N.W./G.W.	67kg/90kg
Package Dimension	880*580*560mm

Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, eye-catching red digital LED display, key programming, and parameter modification during operation.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non-directional, fast and simple.
- ◆ Aero forged aluminum rotors (except multi-tube frame rotors) and various Teflon adapters are available.
- ◆ 10 acceleration rates and 10 deceleration rates for users to choose to achieve the best centrifugal effect.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.
- ◆ The instrument door cover is equipped with a hydraulic rod to reduce operating load.

CFG-5BY Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No. 05254	Swing Rotor	4000rpm	4×25×5/7ml	3360×g	For 2-7ml vacuum tube
No. 05207	Swing Rotor	4000rpm	4×800ml(round)	3450×g	Optional biosafety cover
	Adapter		4×500ml(falcon)		500ml falcon
	Adapter		4×250ml(falcon)		250ml falcon
	Adapter		4×24×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×19×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×14×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No. 05608	Swing Rotor	4000rpm	4×500ml(round)	3530×g	Optional biosafety cover
	Adapter		4×18×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×14×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×9×10/15ml		For 10/15ml tube
	Adapter		4×3×50ml		For 50ml tube
No. 05609	Swing Rotor	4000rpm	4×500ml(rectangle)	3450×g	Optional biosafety cover
	Adapter		4×20×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×16×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×12×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No. 05611	Swing Rotor	4000rpm	4×4×96 well	2940×g	Optional
No. 05610			4×7×50ml	3470×g	For 50ml falcon tube
No. 05213	Swing Rotor	4000rpm	2×5×96 well	3210×g	Optional
No. 05629	Swing Rotor	5000rpm	4×1×50ml	4730×g	Optional
No. 05630			4×1×100ml	4730×g	Optional
No. 05635		4000rpm	4×2×100ml	3200×g	Optional
No. 05634			4×2×50ml	3200×g	Optional
No. 05631			4×8×15ml	3200×g	For 5-15ml tube
No. 05639			4×16×5ml vacuum tube	2530×g	For 2ml vacuum tube
No. 05638			4×16×7ml vacuum tube	2890×g	For 5ml vacuum tube
No. 05640			4×12×10ml vacuum tube	2880×g	For 10ml vacuum tube
No. 05614		4000rpm	4×30×7ml vacuum tube	3160×g	For 5ml vacuum tube
No. 05615			4×40×7ml vacuum tube	3270×g	For 5ml vacuum tube
No. 05618			4×28×10m vacuum tube	3270×g	For 10ml vacuum tube
No. 05237	Swing Rotor	4000rpm	4×Pasteur milk bottle	3830×g	Pasteur milk bottle
No. 05183	Angle Rotor	2000rpm	16×Gabor milk fat meter	896×g	For Gabor milk fat meter
No. 05141	Angle Rotor	5000rpm	30×15ml	3830×g	Optional
No. 05144	Angle Rotor	5000rpm	12×50ml	3860×g	Optional
No. 05145	Angle Rotor	4000rpm	24×50ml	2970×g	Optional
No. 05147	Angle Rotor	5000rpm	6×100ml	3130×g	Optional
No. 05148	Angle Rotor	4000rpm	12×100ml	2970×g	Optional

# Microcentrifuge, Low Speed

CFG-5D



Features:

- ◆ Speed range:300-5000rpm;
- ◆ Rotor speed can be set and displayed by RPM or G-force;
- ◆ Defined program by knob will be stored and activated when power on;
- ◆ Two programs P1/P2, easy to start the procedure by one key;
- ◆ Two deceleration speeds setting to meet different requirements;
- ◆ Easy-to-read processing display and sound alert;
- ◆ Automatic lid-lock release after running;
- ◆ Maintenance-free brush-less DC motor.

Specification

Model	CFG-5D
Speed Range	300-5000rpm, increment:10rpm
Max. RCF	2350xg, increment: 10g
Speed accuracy	±20rpm
Rotor capacity	6x15mL/10mL/7mL/1.5-5ml
Run Time	30sec-99min, HD (continuous running)
Display	LCD
Programs Memory	2
Acceleration/Deceleration	1 ↑ 2 ↓
Safety Devices	Door interlock, Overspeed detector, Automatic internal diagnosis
Motor	Brushless DC motor
Power	Single-phase, 100V-240V,50Hz/60Hz, 70W
Dimension(W×D×H)	300X240X180mm
Weight	5.2kg
Advanced features	Speed/RCF switch; sound-alert function



Available rotors

Cat. No.19500022  
5ml adapter, Adapted to 13×75mm  
blood collection tube



Available rotors

Cat. No.19500023  
1.5/2ml Cryogenic Vials/ centrifuge  
tube adapter



# Bench Top Low Speed Centrifuge

CFG-5DK



### Description

The series of centrifuges has new separation technology based on the state of different particles in a centrifugal atmosphere. They are applied for testing and research in the fields of biochemistry, clinical, hospitals and so on.

### Product Features



- **Driving:** Drived by maintenance-free brushless DC motor with high torque. It offers fast acceleration and dynamic brake and the powerful vibration absorbers make the motor run more steady



- **Safety Protection:** It contains various safety protections including lid locking and holding during rotor on, over speed, unbalance. The electrical lid lock ensures its safety and reliability during running.



- **Control:** Control of speed and time. Direct set for speed and time is user-friendly.



- **Display:** Controlled by microcomputer with touching pad and visual digital display. The last program is stored automatically and RCF can be directly set.



- **Body Structure:** Premium steel housing for safety and reliability; stainless steel chamber for durability and easy cleaning.

### Specification

Model	CFG-5DK
Max Speed	5500r/min
Max RCF	5310×g
Max Capacity	4×500ml
Speed Accuracy	±30r/min
Timer Range	0~99min
Noise	≤58dB
Motor	Brushless DC motor and microcomputer controlled
Power Supply	AC 220V 50Hz 15A
Dimension (W×D×H)	460×590×420mm
Weight	45kg

### Rotors & Tubes

Rotor NO.	Max Capacity	Max Speed	Max RCF.	Tube Size
No.52 Swing Rotor	2×2×96 wells	4000r/min	2380×g	Microtitre-plate
No.56 Swing Rotor	4×50/100ml	5500r/min	5310×g	Φ 38×124
No.57 Swing Rotor	32×10/15ml	4000r/min	2810×g	Φ 16×85-118
No.57 Swing Rotor	32×10/15ml (with windshield)	4000r/min	2810×g	Φ 16×85-118
No.61 Swing Rotor	4×250/8×50/36×10ml	4000r/min	3500×g	Φ 64×113
No.62 Swing Rotor	4×500/12×50/8×100ml	4000r/min	3580×g	Φ 80×140
No.69 Swing Rotor	48/40×5ml	4000r/min	2800×g	Φ 14×54
No.76 Swing Rotor	72×5ml	4000r/min	2830×g	Φ 14×54
No.77 Swing Rotor	8×50/100ml	4000r/min	2810×g	Φ 25×105-115
No.77 Swing Rotor	8×50/100ml	4000r/min	2810×g	Φ 25×105-115

# Low Speed Centrifuge

CFG-5ES



### Rotor Pictures



### Application

It is mainly used in laboratories of biology, medicine, chemistry, physics, etc. It is an ideal instrument for the analysis of serum, plasma, urine, radioimmunoassay, etc.

### Specification

Model	CFG-5ES
Max. Speed	5000rpm
Max. RCF	4420×g
Max. Capacity	4×100ml Swing rotor
Speed Accuracy	±10rpm
Timer	1s~99h59min59s
Sound Emission	≤60dBA
Electricity	AC110/220V, 50/60Hz
External Dimension	530*370*290mm
N.W./G.W.	33kg/38kg
Package Dimension	615*450*390mm

### Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, the high-definition touch screen "Intelligent System" version displays both setting parameters and real-time parameters: Speed, RCF, Time, Rise/Fall rate, Rotor No., Door cover status, etc.
- ◆ Aero forged aluminum rotors (except multi-tube frame rotors) and various Teflon adapters are available.
- ◆ Can store and call 100 sets of programs, with 9 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.

### Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF
No. 05629	Swing rotor	5000rpm	4×1×50ml	4420×g
No. 05630			4×1×100ml	4420×g
No. 05634		4000rpm	4×2×50ml	2820×g
No. 05633			4×4×15ml	2820×g
No. 05632			4×6×10ml	2580×g
No. 05137	Angle rotor	5000rpm	6×15ml	2540×g
No. 05139	Angle rotor	5000rpm	12×15ml	3080×g
No. 05140	Angle rotor	5000rpm	24×15ml	3500×g
No. 05141	Angle rotor	5000rpm	30×15ml	3830×g
No. 05142	Angle rotor	5000rpm	4×50ml	2520×g
No. 05143	Angle rotor	5000rpm	6×50ml	2850×g
No. 05144	Angle rotor	5000rpm	12×50ml	3860×g
No. 05146	Angle rotor	5000rpm	4×100ml	2630×g
No. 05147	Angle rotor	5000rpm	6×100ml	3130×g
No. 05648	Swing rotor	4000rpm	2×2×96 well	2020×g



# Low Speed Centrifuge

CFG-5EY



### Rotor Pictures



### Application

It is mainly used in laboratories of biology, medicine, chemistry, physics, etc. It is an ideal instrument for the analysis of serum, plasma, urine, radioimmunoassay, etc.

### Specification

Model	CFG-5EY
Max. Speed	5000rpm
Max. RCF	4420×g
Max. Capacity	4×100ml Swing rotor
Speed Accuracy	±10rpm
Timer	1s~99min
Sound Emission	≤60dBA
Electricity	AC110/220V, 50/60Hz
External Dimension	530*370*290mm
N.W./G.W.	33kg/41.9kg
Package Dimension	620*470*410mm

### Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, overspeed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, eye-catching red digital LED display, key programming, and parameter modification during operation.
- ◆ Aero aluminum rotors (except multi-tube frame rotors) and various Teflon adapters are available.
- ◆ 10 acceleration rates and 10 deceleration rates for users to choose to achieve the best centrifugal effect.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.

### Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF
No.. 05629	Swing rotor	5000rpm	4×1×50ml	4420×g
No. 05630			4×1×100ml	4420×g
No. 05634		4000rpm	4×2×50ml	2820×g
No. 05633			4×4×15ml	2820×g
No. 05632			4×6×10ml	2580×g
No. 05137	Angle rotor	5000rpm	6×15ml	2540×g
No. 05139	Angle rotor	5000rpm	12×15ml	3080×g
No. 05140	Angle rotor	5000rpm	24×15ml	3500×g
No. 05141	Angle rotor	5000rpm	30×15ml	3830×g
No. 05142	Angle rotor	5000rpm	4×50ml	2520×g
No. 05143	Angle rotor	5000rpm	6×50ml	2850×g
No. 05144	Angle rotor	5000rpm	12×50ml	3860×g
No. 05146	Angle rotor	5000rpm	4×100ml	2630×g
No. 05147	Angle rotor	5000rpm	6×100ml	3130×g
No. 05648	Swing rotor	4000rpm	2×2×96 well	2020×g



# Low Speed Centrifuge, Benchtop

CFG-6B



### Description

- ◆ Microcomputer control, DC brushless motor, stable operation, low noise and high speed accuracy.
- ◆ The real-time conversation Of Speed and RCF is convenient for operation.
- ◆ Self-locking device, lid safety device, over-speed safety device, and automatic alarm device, etc.



LED or LCD display. user-friendly interface, simple and convenient operations.  
Touch panel, programmable operation, operation data can be set according to demand and stored automatically.

### Specification

Model	CFG-6B
Max speed	6000r/min
Max RCF	5120×g
Max capacity	15ml×16
Speed accuracy	± 30r/min
Time setting	1min~99min
Noise	<65dB(A)
Power supply	110V/60Hz 220V/50Hz
Dimension(LxWxH)	410mm×490mm×310mm
Packing size(LxWxH)	500mm×580mm×400mm
Net weight	22kg



### Accessories Center

**No.1**

Capacity: 12x15ml  
Max Speed: 6000r/min  
Max RCF: 5120xg

**No.2**

Capacity: 12x15ml  
Max Speed: 4200r/min  
Max RCF: 2760xg

Adaptor: 5ml/7ml

2x12x5ml

Adaptor: 0.5ml  
1.5ml  
5ml/7ml

12x2x10ml

Adaptor: 0.5ml  
5ml, 10ml  
5ml/7ml

12x15ml

**No.2**

Capacity: 16x15ml  
Max Speed: 4200r/min  
Max RCF: 2760xg  
Rotor Angle: ≤90°

Adaptor: 1.5ml  
5ml  
10ml  
5ml/7ml

4x4x15ml

**No.2**

Capacity: 4x50ml  
Max Speed: 4200r/min  
Max RCF: 2760xg

Adaptor: 4x2x1.5ml  
4x5ml  
4x10ml  
4x15ml  
4x20ml  
4x5ml/7ml

50mlx4

# Low Speed Centrifuge

CFG-6BA



### Application

It is mainly used in laboratories of biology, medicine, chemistry, physics, etc. It is an ideal instrument for the analysis of serum, plasma, urine, radioimmunoassay, etc.

### Specification

Model	CFG-6BA
Max. Speed	6000rpm
Max. RCF	4730×g
Max. Capacity	4×300ml Swing rotor
Timer	1s~99min
Speed Accuracy	±10rpm
Sound Emission	≤60dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	610*450*355mm
N.W./G.W.	52kg/70kg
Package Dimension	820*520*540mm

### Rotor Pictures



### Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, eye-catching red digital LED display, key programming, and parameter modification during operation.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple.
- ◆ Aero forged aluminum rotors (except multi-tube frame rotors) and various Teflon adapters are available.
- ◆ 10 acceleration rates and 10 deceleration rates for users to choose to achieve the best centrifugal effect.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.
- ◆ The instrument door cover is equipped with a hydraulic rod to reduce operating load.

CFG-6BA Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05619	Swing Rotor	4000rpm	4×14×5/7ml	3180×g	For 2-7ml vacuum tube
	Swing Rotor	4000rpm	4×300ml(round)	3180×g	Optional biosafety cover
	Adapter		4×10×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×9×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×7×10/15ml		For 10/15ml tube
No.05620	Adapter		4×2×50ml		For 50ml tube
	Swing Rotor	4000rpm	4×300ml(rectangle)	3150×g	Optional biosafety cover
	Adapter		4×16×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×12×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×9×10/15ml		For 10/15ml tube
No.05623	Swing Rotor	4000rpm	4×4×50ml		For 50ml tube
			4×24×5ml vacuum tube	2840×g	For 2ml vacuum tube
			4×24×7ml vacuum tube	3140×g	For 5ml vacuum tube
No.05622	Swing Rotor	4000rpm	4×18×10ml vacuum tube	3140×g	For 10ml vacuum tube
No.05621			4×250ml(falcon)	3260×g	250ml falcon
No.05211	Swing Rotor	4000rpm	4×250mlAdapter		
No.05214	Swing Rotor	4000rpm	2×4×96 well	2910×g	Optional
No.05216			2×3×48 well	2300×g	Optional
No.05629	Swing Rotor	5000rpm	4×1×50ml	4730×g	Optional
No.05630		4000rpm	4×1×100ml	4730×g	Optional
No.05635			4×2×100ml	3020×g	Optional
No.05634			4×2×50ml	3200×g	Optional
No.05631			4×8×15ml	3200×g	Optional
No.05639			4×16×5ml vacuum tube	2530×g	For 2ml vacuum tube
No.05638			4×16×7ml vacuum tube	2890×g	For 5ml vacuum tube
No.05640			4×12×10ml vacuum tube	2880×g	For 10ml vacuum tube
No.05182	Angle Rotor	2000rpm	12×Gabor milk fat meter	815×g	For Gabor milk fat meter
No.05139	Angle Rotor	6000rpm	12×15ml	4430×g	Optional
No.05140	Angle Rotor	5000rpm	24×15ml	3500×g	Optional
No.05142	Angle Rotor	6000rpm	4×50ml	3620×g	Optional
No.05143	Angle Rotor	6000rpm	6×50ml	4110×g	Optional
No.05144	Angle Rotor	5000rpm	12×50ml	3860×g	Optional
No.05146	Angle Rotor	6000rpm	4×100ml	3790×g	Optional
No.05147	Angle Rotor	5000rpm	6×100ml	3130×g	Optional
No.05148	Angle Rotor	4000rpm	12×100ml	2970×g	Optional

Low Speed Centrifuge

CFG-6BAS



Application

It is mainly used in laboratories of biology, medicine, chemistry, physics, etc. It is an ideal instrument for the analysis of serum, plasma, urine, radioimmunoassay, etc.

Rotor Pictures





Specification

Model	CFG-6BAS
Max. Speed	6000rpm
Max. RCF	4730×g
Max. Capacity	4×300ml Swing rotor
Timer	1s~99h59min59s
Speed Accuracy	±10rpm
Sound Emission	≤60dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	610*450*355mm
N.W./G.W.	52kg/70kg
Package Dimension	820*520*540mm

Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, the high-definition touch screen "Intelligent System" version displays both setting parameters and real-time parameters: Speed, RCF, Time, Acceleration/Deceleration gear, Rotor No., Door cover status, etc.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple.
- ◆ Aero forged aluminum rotors (except multi-tube frame rotors) and various Teflon adapters are available.
- ◆ Can store and call 100 sets of programs, with 9 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.
- ◆ Optional: Automatic recognition of rotor magnetism to avoid misoperation and over-speed operation.

CFG-6BAS Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05619	Swing Rotor	4000rpm	4×14×5/7ml	3180×g	For 2-7ml vacuum tube
	Swing Rotor	4000rpm	4×300ml(round)	3180×g	Optional biosafety cover
	Adapter		4×10×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×9×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×7×10/15ml		For 10/15ml tube
	Adapter		4×2×50ml		For 50ml tube
No.05620	Swing Rotor	4000rpm	4×300ml(rectangle)	3150×g	Optional biosafety cover
	Adapter		4×16×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×12×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×9×10/15ml		For 10/15ml tube
	Adapter		4×4×50ml		For 50ml tube
No.05623	Swing Rotor	4000rpm	4×24×5ml vacuum tube	2840×g	For 2ml vacuum tube
No.05622			4×24×7ml vacuum tube	3140×g	For 5ml vacuum tube
No.05621			4×18×10ml vacuum tube	3140×g	For 10ml vacuum tube
No.05211	Swing Rotor	4000rpm	4×250ml(falcon)	3260×g	250ml falcon
			4×250mlAdapter		
No.05214	Swing Rotor	4000rpm	2×4×96 well	2910×g	Optional
No.05216			2×3×48 well	2300×g	Optional
No.05629	Swing Rotor	5000rpm	4×1×50ml	4730×g	Optional
No.05630			4×1×100ml	4730×g	Optional
No.05635		4000rpm	4×2×100ml	3020×g	Optional
No.05634			4×2×50ml	3200×g	Optional
No.05631			4×8×15ml	3200×g	Optional
No.05639			4×16×5ml vacuum tube	2530×g	For 2ml vacuum tube
No.05638			4×16×7ml vacuum tube	2890×g	For 5ml vacuum tube
No.05640			4×12×10ml vacuum tube	2880×g	For 10ml vacuum tube
No.05182		2000rpm	12×Gabor milk fat meter	815×g	For Gabor milk fat meter
No.05139		6000rpm	12×15ml	4430×g	Optional
No.05140		5000rpm	24×15ml	3500×g	Optional
No.05142		6000rpm	4×50ml	3620×g	Optional
No.05143	Angle Rotor	6000rpm	6×50ml	4110×g	Optional
No.05144	Angle Rotor	5000rpm	12×50ml	3860×g	Optional
No.05146	Angle Rotor	6000rpm	4×100ml	3790×g	Optional
No.05147	Angle Rotor	5000rpm	6×100ml	3130×g	Optional
No.05148	Angle Rotor	4000rpm	12×100ml	2970×g	Optional



# Low Speed Centrifuge

CFG-6BC



### Application

It is mainly used in laboratories of biology, medicine, chemistry, physics, etc. It is an ideal instrument for the analysis of serum, plasma, urine, radioimmunoassay, etc.

### Specification

Model	CFG-6BC
Max. Speed	6000rpm
Max. RCF	3660×g
Max. Capacity	6×100ml
Timer	1s~99min
Speed Accuracy	±10rpm
Sound Emission	≤55dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	470*320*250mm
N.W./G.W.	16kg/18kg
Package Dimension	565*410*340mm

### Rotor Pictures



### Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF
No.05177	Angle rotor	4000rpm	12×10/15ml	2150×g
No.05198	Angle rotor	4000rpm	12×20ml	2220×g
No.05175	Angle rotor	4000rpm	18×10ml	2250×g
No.05179	Angle rotor	4000rpm	30×7/5ml	2250×g
No.05180	Angle rotor	4000rpm	6×50ml	2100×g
No.05176	Angle rotor	4000rpm	24×10ml	2200×g
No.05137	Angle rotor	6000rpm	6×15ml	3660×g
No.05143	Angle rotor	5000rpm	6×50ml	2850×g
No.05147	Angle rotor	5000rpm	6×100ml	3130×g
No.05139	Angle rotor	5000rpm	12×15ml	3080×g
No.05221	Swing rotor	5000rpm	6×10ml	3460×g

### Feature

- ◆ All-steel multi-layer explosion-proof structure, stainless steel centrifugal chamber.
- ◆ Maintenance-free DC brushless motor drive, smooth and quiet operation.
- ◆ Microcomputer processor precise control, digital display, easy operation, automatic calculation of centrifugal force RCF value, speed and centrifugal force can be switched with each other by one key.
- ◆ 10 acceleration rates and 10 deceleration rates for users to choose to achieve the best centrifugal effect.
- ◆ The mute electronic door lock is easy to use and has an emergency door opening function.
- ◆ Small size and low cover height, saving laboratory space.
- ◆ With door lock, over-speed, imbalance automatic protection, and fault self-diagnosis.

# Low Speed Centrifuge

## CFG-6JP



### Description

The centrifuge adopts microcomputer control, large-screen color LCD display, and full touch-screen operation interface to directly set the working program, RCF, speed, time, acceleration and deceleration, and rotor model.



### Features

- ◆ Brushless AC variable frequency motor drive and special drive module ensure the reliability of the circuit.
- ◆ Double door cover lock system, starting means locking, ensuring safe operation.
- ◆ Provides 20 kinds of working program storage, users can freely program and call their working parameters, which is easy to use and improves work efficiency.
- ◆ Provide 15 kinds of acceleration/deceleration; User can set one group of acceleration and deceleration arbitrarily according to the sample requirements.
- ◆ Two timing functions: at set rpm and start timing, and the jog is short spin function.
- ◆ Differential centrifugation: Five differential centrifugation programs are reserved, and users can set them according to their needs.
- ◆ Double-layer steel structure and stainless steel centrifugal chamber to avoid corrosion.
- ◆ Automatic balance and imbalance protection. When an error or imbalance occurs, an audible alarm signal will be issued and the centrifuge will automatically stop running.
- ◆ Easily adjust speed, RCF, time and temperature during operation without stopping.
- ◆ The shortest acceleration / deceleration times≤25s.
- ◆ Countdown function : The countdown in seconds, real time display of remaining working time.
- ◆ Can customize 485 communication interface function.
- ◆ Sunken exhaust passage prevents aerosol pollution during centrifugation.

### Specification

Model	CFG-6JP
Max.Speed	6000rpm
Max.RCF	5502xg
Max.Capacity	500mlx4
Speed Accuracy	±10rpm
Timing Range	1s~99h59min59s/Jog (short spin)
Sound Emission	≤60dB
Electricity	AC 220V, 50Hz, 10A
Power	400W
Dimension(W*D*H)	610*485*410mm
N.W./G.W.	42kg/77kg
Package Dimension(W*D*H)	770*670*640mm

### Rotor Configuration

Rotor	Capacity	Max. Speed	Max.RCF
NO1: Swing Rotor Cross	300mlx4	4500rpm Adapter:250mlx4,100mlx4, 50mlx12 15ml(conical)x28, 10ml Vacuum Tube x40 5ml Vacuum Tube x56, 5mlx76	3894xg
NO2: Swing Rotor Cross	500mlx4	4200rpm Adapter:250mlx4,100mlx12, 50mlx16 15ml(conical)x40, 10ml Vacuum Tube x56 3/5ml Vacuum Tube x68, 5mlx96	3451xg
NO3: Cap Remover Swing Rotor Cross	5mlx68	4200rpm 5ml Vacuum Tube x68	3451xg
NO4: Cap Remover Swing Rotor Cross	5ml Vacuum Tube x84, 3ml Vacuum Tube x100 50mlx6	4200rpm	3451xg
NO5: Angle Rotor	50mlx6	6000rpm	5502xg
NO6: Angle Rotor	96well×2	6000rpm	5502xg
NO7: Microplate	96well×2×2	5000rpm 5000rpm	3530xg 3530xg

# Low Speed Centrifuge, Benchtop

CFG-550



## Description

- ◆ Microcomputer control, DC brushless motor, stable operation, low noise and high speed accuracy.
- ◆ The real-time conversation of speed and RCF is convenient for operation.
- ◆ It has self-locking device, lid safety device, over-speed safety device, and automatic alarm device, etc.
- ◆ It has 10 files of acceleration and deceleration lever for you choice.



LED or LCD display, user-friendly interface, simple and convenient operations.  
Touch panel, programmable operation, operation data can be set according to demand and stored automatically.

## Specification

Model	CFG-550
Max speed	5500RPM
Max RCF	5310×g
Max capacity	500ml×4
Speed accuracy	± 30r/min
Time setting	1min~99min/1min~99h59min
Noise	<65dB(A)
Power supply	110V/60Hz 220V/50Hz
Dimension(LxWxH)	460mm×540mm×340mm
Packing size(LxWxH)	550mm×630mm×430mm
Net weight	31kg






















## Accessories Center

No.4				100ml×4 Bucket
Model	NO.2			
Rotor capacity	100ml×4			
Max. speed	5000r/min			
Max. RCF	4390×g			
Adapters	1.5ml×4×4			
	5ml/7ml ×4 Vacuum Tube			
	5ml×2×4			
	10ml×3×4 G RIA Tube			
	15ml×4			
	20ml×4			
	50ml×4			

No.3		Rotor capacity:8×96 well Max. speed:4000r/min Max. RCF:2200×g		8×96 well Microplate	No.1		Rotor capacity:15ml×12 Max. speed:5500r/min Max. RCF:5310×g
------	--	---	--	-------------------------	------	--	---

No.6		500ml Conical Tube 500ml×4		500ml×4 V-bottom		250ml×4 V-bottom
				50ml×4×4 V-bottom		15ml×7×4 V-bottom

No.5		50ml×2×4 Bucket		15ml/10ml ×4×4 Bucket	Adapters: 1.5ml×2 5ml/7ml Vacuum Tube 5ml,10ml 15ml,20ml		15ml/10ml×6×4 Bucket	Adapters: 1.5ml 5ml/7ml Blood Vacuum Tube 5ml,10ml
					Adapters: 1.5ml 5ml/7ml Blood Vacuum Tube 5ml,10ml		15ml/10ml ×8×4 Bucket	Adapters: 1.5ml 5ml/7ml Vacuum Tube 5ml,10ml

No.2						
		500ml Bucket	1.5ml×18×4	5ml×7ml×19×4 Vacuum Tube	10ml×14×4 G RIA Tube	15ml×9×4
						
		500ml Bottle	20ml×7×4	50ml×3×4	100ml×4	250ml×4
Rotor capacity:500ml×4 Max.speed:4000r/min Max.RCF:3220×g						
		1.5ml×25×4	5ml×28×4 Vacuum Tube	10ml×20×4 G RIA Tube	15ml×10×4	
						
		50ml×4×4	100ml×2×4	250ml×4l		
	4×2×96 well Microplate Bucket			7ml×24×4 Vacuum Tube		

# Low Speed Centrifuge

## CFG-550JP

### Description

The centrifuge adopts microcomputer control, large-screen color LCD display, and full touch-screen operation interface to directly set the working program, RCF, speed, time, acceleration and deceleration, and rotor model.



### Features

- ◆ Brushless AC variable frequency motor drive and special drive module ensure the reliability of the circuit.
- ◆ Double door cover lock system, starting means locking, ensuring safe operation.
- ◆ Provides 20 kinds of working program storage, users can freely program and call their working parameters, which is easy to use and improves work efficiency.
- ◆ Provide 15 kinds of acceleration/deceleration; User can set one group of acceleration and deceleration arbitrarily according to the sample requirements.
- ◆ Two timing functions: at set rpm and start timing, and the jog is short spin function.
- ◆ Differential centrifugation: Five differential centrifugation programs are reserved, and users can set them according to their needs.
- ◆ Double-layer steel structure and stainless steel centrifugal chamber to avoid corrosion.
- ◆ Automatic balance and imbalance protection. When an error or imbalance occurs, an audible alarm signal will be issued and the centrifuge will automatically stop running.
- ◆ Easily adjust speed, RCF, time and temperature during operation without stopping.
- ◆ The shortest acceleration / deceleration times≤25s.
- ◆ Countdown function : The countdown in seconds, real time display of remaining working time.
- ◆ Can customize 485 communication interface function.
- ◆ Sunken exhaust passage prevents aerosol pollution during centrifugation.

### Specification

Model	CFG-550JP
Max.Speed	6000rpm
Max.RCF	5502xg
Max.Capacity	750mlx4
Speed Accuracy	±10rpm
Timing Range	1s~99h59min59s/Jog (short spin)
Sound Emission	≤62dB
Electricity	AC 220V, 50Hz, 10A
Power	600W
Dimension(W*D*H)	640*515*450mm
N.W./G.W.	60kg/83kg
Package Dimension(W*D*H)	750*645*630mm

### Rotor Configuration

Rotor	Capacity	Max. Speed	Max.RCF
NO1: Swing Rotor Cross	750mlx4 Adapter:500mlx4, 250ml (round bottom)x4, 250ml(conical)x4, 100mlx12,50ml(conical)x20, 50ml(round bottom)x28, 15ml(conical)x56, 10ml(vacuum tube)x76, 3ml/5ml/7ml(vacuum tube)x96,5mlx148	4200rpm	3727xg
NO2: Cap Remover Swing Rotor Cross	5mlx96 Adapter: 5mlx96	4200rpm	3727xg
NO3: Anti-pollution Swing Rotor Cross	750mlx4 Adapter:500mlx4, 250ml (round bottom)x4, 100mlx12,50ml(conical)x20, 50ml(round bottom)x28, 15ml(conical)x56, 10ml(vacuum tube)x76, 3ml/5ml/7ml(vacuum tube)x96, 5mlx148	4200rpm	3727xg
NO4: Swing Rotor Cross (eight claws)	100mlx16 Adapter:100mlx16, 50mlx16, 10mlx64	4200rpm	3727xg
NO5: Swing Rotor Cross (honeycomb briquette)	5mlx148 5mlx148	4200rpm	3451xg
NO6: Angle Rotor	50mlx6	6000rpm	5502xg
NO7: Microplate	96(deep well plate)×2 96(microplate)×2×2	5000rpm 5000rpm	3530xg 3530xg
NO8: Microplate	96(deep well plate)×4 96(microplate)×4×2	4000rpm 4000rpm	3667xg 3667xg



# Low Speed Centrifuge

## Large Capacity, Benchtop



CFG-580

Accessories Center

Rotor Type	Max Speed(rpm)	Max RCF(g)	Max Capacity	Adapters
Angle Rotor	5800r/min	5060×g	6×50ml	15ml
				20ml
Swing Rotor	4000r/min	3780×g	4×750ml	4×24×5/7ml
				Vacuum Tube
				4×14×15ml
				4×12×20ml
				4×5×50ml
				4×3×100ml
				4×250ml
Swing Rotor	4000r/min	3220×g	4×500ml	4×500ml
				4×19×5/7ml
				Vacuum Tube
				4×9×15ml
				4×7×20ml
				4×3×50ml
				4×100ml
Swing Rotor	4300r/min	3582×g	4×250ml	4×250ml
				4×9×5/7ml
				Vacuum Tube
				4×9×1.5ml
				4×7×5ml
				4×5×15ml
				4×4×20ml
Swing Rotor	4000r/min	3500×g	6×250ml	4×50ml
				4×100ml
				6×9×5/7ml
				Vacuum Tube
				6×9×1.5ml
				6×7×5ml
				6×5×15ml
Swing Rotor	4000r/min	2200×g	2×2×96 well	6×4×20ml
				6×50ml
				6×100ml



Features:

- ◆ CFG-580 is a multi-purpose low-speed and large-capacity centrifuge, an intelligent centrifuge with internationally advanced technology.
- ◆ Microcomputer control, high-definition large-screen LCD display, intuitive controls simplify operation, humanized operation interface, providing detailed information on various operating parameters and ideal performance processing status, simple and easy to use.
- ◆ It has 9 levels acceleration/10 levels deceleration, enabling reading conversion and setting between rpm/RCF, which is convenient and fast, and simultaneously displays acceleration and deceleration curve images to achieve ideal centrifugation effects.
- ◆ It has multiple protection functions such as overspeed, imbalance, and door cover to ensure the safety and reliability of the machine.
- ◆ Novel electronically controlled door lock, easily closes and securely locks the centrifuge.
- ◆ The space-saving design of the large-capacity centrifugal chamber and the rich rotor specifications enable one machine to be used for multiple purposes.

Specification

Model	CFG-580
Max speed	5800r/min
Max RCF	5060×g
Max capacity	4×750ml
Speed accuracy	±10r/min
Time setting	1min~99min59s
Noise	<65db(A)
Power supply	AC220V 50Hz 15A 750W
Dimension(L×W×H)	495mm×620mm×445mm
Net weight	60kg

Low Speed Centrifuge, Benchtop

CFG-B5BL



Features:

- ◆ Microcomputer control, variable-conversion motor, stable operation, low noise and high speed accuracy.
- ◆ The real-time conversation of speed and RCF is convenient for operation.
- ◆ Self-locking device, lid safety device, over-speed safety device, and automatic alarm device, etc.



Specification

LED or LCD display, user-friendly interface, simple and convenient operations.

Touch panel, programmable operation, operation data can be set according to demand and stored automatically.

Model	CFG-B5BL
Max speed	5000RPM
Max RCF	5030×g
Max capacity	500ml ×4
Speed accuracy	± 50r/min
Time setting	1min~99min
Noise	<65dB(A)
Power supply	110V/60Hz 220V/50Hz
Dimension(L*W*H)	460mm×540mm×340mm
Packing size(L*W*H)	550mm×630mm×430mm
Net weight	31kg

Accessories Center

No.3

Rotor capacity:250ml×4  
Max. RCF:4300r/min  
Max. RCF:3582×g

250ml Bucket

250ml Bottle

<p>1.5ml×9×4</p>	<p>5ml/7ml×9×4 Vacuum Tube</p>	<p>5ml×7×4</p>
<p>10ml×7×4 Internal Thread</p>	<p>15ml×5×4</p>	<p>20ml×4×4</p>
<p>50ml×4</p>	<p>100ml×4</p>	

No.3

Rotor capacity:7ml×72  
Max. speed:4300r/min  
Max. RCF:3582×g

7ml×18×4 Bucket

No.4

Rotor capacity:8×96well  
Max. speed:4000r/min  
Max. RCF:2200×g

8×96well Microplate

No.2

50ml×2×4 Bucket

Model	NO.2
Rotor capacity	50ml×8
Max. speed	5000r/min
Max. RCF	5030×g
Adapters	1.5ml×2×8
	5ml/7ml ×8 Vacuum Tube
	5ml×8
	10ml×8
	15ml×8
	20ml×8

No.1

Rotor capacity:500ml×4  
Max. RCF:4000r/min  
Max. RCF:3220×g

500ml Bucket

500ml Bottle

Bucket

<p>1.5ml×20×4</p>	<p>5ml/7ml×20×4 Blood Vacuum Tube</p>	<p>10ml×15×4 G RIA Tube</p>
<p>15ml×8×4</p>	<p>20ml×9×4</p>	<p>50ml×4×4</p>
<p>100ml×2×4</p>		<p>250ml×4</p>
<p>1.5ml×25×4</p>	<p>5ml×28×4 Blood Vacuum Tube</p>	<p>10ml×20×4</p>
<p>15ml×10×4</p>	<p>50ml×4×4</p>	<p>250ml×4</p>
<p>4×2×96 Microplate</p>	<p>4×24×7ml Blood Vacuum Tube</p>	

No.6

Max. speed:4000r/min  
Max. RCF:3000×g

<p>7ml×12×4 Bucket</p>	<p>15ml×6×4 Bucket</p>	<p>15ml×9×4 Bucket</p>
<p>50ml×4 Bucket</p>	<p>50ml×2×4 Bucket</p>	<p>100ml×4 Bucket</p>

# High Speed Centrifuge

CFG-15D



## Description

- ◆ Patent multi-flow air cooling design to provide air exchange to prevent chamber warming.
- ◆ Three-layer seal ensure airtightness and biosafety.
- ◆ High strength aluminum alloy rotor can be fully autoclaved for unlimited service life.
- ◆ Four rotors are optional complete with 24 places 1.5/2.0mL tubes, bigger 5.0mL, smaller 0.2mL and 0.5mL tubes with adapters.

## Specification

Model	CFG-15D
Max. Speed	15000rpm(200-15000rpm), increment:10rpm
Max. RCF	21380×g, increment:10×g
Speed Accuracy	±20 rpm
Rotor Capacity	5mL×18, 5mL culture tube×12 0.2mL/0.5mL/1.5mL/ 2mL×24, 0.5mL×36, PCR8×4
Run Time	30sec-99min/Continuous
Acceleration/Braking time (Sec)	25s ↑ 25s ↓
Motor	Brushless DC motor
Safety Devices	Dual door interlock, Over-speed detection, Automatic internal diagnosis
Power	Single-phase, AC200V-400V, 50Hz/60Hz, 5A, AC100V-120V, 50Hz/60Hz, 8A 200W
Noise Level	≤64dB
Dimension[W×D×H]	280mm×364mm×266mm
Weight	12 kg
Certification	CE cTÜVus FCC MCA
Other functions	Speed/RCF switch; Short-time run function; sound-alert function
Package Dimension[W×D×H]	520mm×520mm×500mm
G.W.	27kg

# High Speed Centrifuge

CFG-15Y



## Description

- It is a miniaturized high-speed centrifuge with small footprint and safe operation that for biological laboratories. It accelerates/decelerates quickly with soft brake function, effectively preventing sample resuspension and protecting sensitive samples.



Rotor lid



Tube adaptors

## Features

- ◆ Noise reduction and near silent running.
- ◆ Pressing the “Quick” key alone for transient centrifugation.
- ◆ High strength aluminum alloy rotor is sterilizable.
- ◆ Unique air duct for minimum sample temperature rise.
- ◆ Strong Al-alloy autoclavable rotor.
- ◆ Safe and reliable electronic lock protection.
- ◆ Equipped with an automatic imbalanced detection system.

## Specification

Model	CFG-15Y
Speed	500~15000rpm (100rpm increments)
Max.RCF	100~15000xg (100xg increments)
Capacity	12×1.5/2.0mL
Max.Rotor Radius	60mm
Max.Sample Density	1.2g/mL
Acceleration/ Deceleration Rate (Fast)	≤ 25s
Acceleration/Deceleration Rate (Slow)	60±5s
Liquid Temperature Rise	≤ 10℃
Timer	1s~99min59s
Electricity	DC24V 5A
Power	100W
Sound Emission	≤ 60dB
Dimension(W*D*H)	230*270*155mm
N.W./G.W.	4.3kg/6.3kg
Shipping Dimension(L*W*H)	400*390*290mm



# High Speed Centrifuge

CFG-16.5B



## Description

It is suitable for experiments in biology, medicine, agriculture and other fields, and is the first choice for genetic gene, protein nucleic acid PCR experiments.


## Specification

Model	CFG-16.5B
Max. Speed	16500r/min
Max. RCF	21380×g
Max.Capacity	4×100mL
Speed Accuracy	±30r/min
Time Setting	1min~99min59s
Power Supply	AC 220V 50Hz 16A
Dimensions(L*W*H)	350×495×350mm
Package Dimension (W*D*H)	760*450*540mm
Net Weight	30kg
G.W.	45kg

## Advantages



- ◆ **Display:**  
5-inch high-definition touch screen, easy to operate and intuitive display;
- ◆ **Scheme:**  
15 groups of programs can be stored for users to use;
- ◆ **Performance:**  
AC variable frequency motor, high speed control precision, imported environmental protection compressor;
- ◆ **Convenience:**  
Free switching of speed and RCF

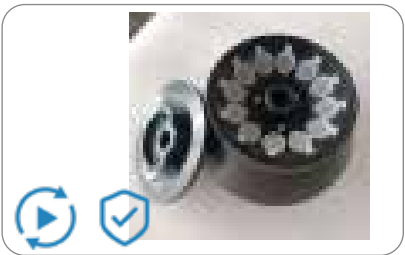

- ◆ **Safety Protection:**  
Automatically identify 7 different rotors to eliminate potential safety hazards caused by user misoperation (Optional function)
- ◆ **Control:**  
It has 9 files of acceleration and 10 files of deceleration level, which can effectively prevent secondary suspension and have a good centrifugal effect.



- ◆ **Safety:**  
There are various protections such as overspeed, door protection, imbalance protection, etc. to ensure the safety of human and machine
- ◆ **Particularity:**  
Special air duct to ensure the rotor works under normal temperature;
- ◆ **Speciality :** Airtight rotor, effectively prevent aerosols

## Rotor(optional)

Rotor Type	Max Speed(rpm)	Max RCF(g)	Max Capacity	Dimension of Centrifugal Tube
Angle Rotor	13000	19080	48×0.5mL	Φ8×32
Angle Rotor	16500	18400	12×1.5/2mL	Φ10×42
Angle Rotor	15000	21380	24×1.5/2mL	Φ10×42
Angle Rotor	13000	19270	32×1.5/2mL	Φ10×42
Angle Rotor	12000	10100	12×5mL	Φ14×54
Angle Rotor	12500	16060	12×10mL	Φ16×87
Angle Rotor	12000	15370	8×15mL	Φ17×121
Angle Rotor	12000	13120	6×50mL	Φ29×105
Angle Rotor	12000	13120	6×50mL(falcon tube)	Φ29×105
Angle Rotor	10000	10620	4×100mL	Φ38×125
Swing Rotor(microplate)	4000	2000	2×2×48well	

# High Speed Centrifuge, Benchtop

CFG-16B



## Specifications

Microcomputer control, DC brushless motor, stable operation, low noise and high speed accuracy.



## Specification

Model	CFG-16B
Max speed	16000r/min
Max RCF	17800×g
Max capacity	5ml×10
Speed accuracy	± 30r/min
Time setting	1min~99min
Noise	<65db(A)
Power supply	AC110V/60Hz AC220V/50Hz
Dimension(L×W×H)	230mm×310mm×240mm
Package Dimension (W*D*H)(mm)	380mm×310mm×320mm
G.W.(kg)	12kg

## Rotor

NO.1  
Capacity:  
1.5ml/2.2ml×12  
Speed: 16000r/min  
RCF: 17800×g  
Adapters:0.2ml、 0.5ml

NO.2  
Capacity: 5ml×10  
Speed:13000r/min  
RCF:11400×g  
Adapter: 0.5ml、 1.5ml

NO3  
Capacity:  
1.5ml/2.2ml×18  
Speed:13200r/min  
RCF:16110×g  
Adapters:0.2ml、 0.5ml

## Technical performance



- ◆ Touching panel, programmable operation
- ◆ LED display, user-friendly interface, simple and convenient operations.
- ◆ The operation data can be set according to demands and stored automatically.
- ◆ The real-time conversation of Speed and RCF is convenient for operation.
- ◆ It has self-locking device, over-speed safety device, and auto-matic alarm device.

# High Speed Centrifuge

CFG-16BY



### Rotor Pictures



### Application

It is suitable for room temperature centrifugal purification and concentration tests of intracellular chemicals, microorganisms, viruses, subcellular cells, bacterial bodies, etc. in animal and plant molecular biology.

### Specification

Model	CFG-16BY
Max. Speed	16000rpm
Max. RCF	20600×g
Max. Capacity	6×100ml Angle rotor
Timer	1s~99min
Speed Accuracy	±10rpm
Sound Emission	≤62dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	510*370*320mm
N.W./G.W.	42kg/50kg
Package Dimension	715*435*420mm

### Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, eye-catching red digital LED display, key programming, and parameter modification during operation.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple .
- ◆ Aero forged aluminum rotors (except multi-tube frame rotors) and various Teflon adapters are available.
- ◆ 10 acceleration rates and 10 deceleration rates for users to choose to achieve the best centrifugal effect.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.

### Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF
No.05105	Angle rotor	15000rpm	30×0.5ml	18510×g
No.05106	Angle rotor	14000rpm	40×0.5ml	19970×g
No.05101	Angle rotor	16000rpm	12×1.5/2ml	17940×g
No.05102	Angle rotor	15000rpm	24×1.5/2m	20600×g
No.05103	Angle rotor	13500rpm	30×1.5/2ml	19340×g
No.05104	Angle rotor	13000rpm	48×1.5/2ml	17930×g
No.05107	Angle rotor	15000rpm	16×5ml	19350×g
No.05108	Angle rotor	14000rpm	12×7ml	16370×g
No.05109	Angle rotor	14000rpm	6×10ml	16460×g
No.05110	Angle rotor	12000rpm	12×10ml	14510×g
No.05113	Angle rotor	11000rpm	8×15ml	12730×g
No.05114	Angle rotor	10000rpm	12×15ml	11840×g
No.05116	Angle rotor	12000rpm	8×20m	14510×g
No.05117	Angle rotor	12000rpm	6×30m	14000×g
No.05120	Angle rotor	11000rpm	6×50m	13480×g
No.05122	Angle rotor	7000rpm	8×50m	6190×g
No.05128	Angle rotor	10000rpm	4×100ml	10310×g
No.05129	Angle rotor	10000rpm	6×100ml	11380×g
No.05140	Angle rotor	5000rpm	24×15ml	3500×g
No.05224	Swing rotor	15000rpm	4×5ml	19920×g
No.05216	Swing rotor	4000rpm	2×3×48 well	2300×g

# High Speed Centrifuge

CFG-16D



## Description

- This series of centrifuges is a conventional laboratory centrifuge. They are applicable for the tests with small samples, many processes, large centrifugal force and little temperature requirement. They are widely used in the fields of biochemistry, genetic engineering, agriculture, farming, food safety, medicine and so on. Bench top low speed centrifuges for micro samples' fast separation and synthesis.



- Microcomputer control
- With touching pad and LED digital display
- Durability and easy cleaning
- Various safety protections
- Safety and reliability during running

## Advantages



◆ **Driving:** Drived by maintenance-free brushless DC motor with high torque. It offers fast acceleration and dynamic brake and the powerful vibration absorbers make the motor run more steady.



◆ **Display:** Controlled by microcomputer with touching pad and LED digital display. The last program is stored automatically and RCF can be directly set.



◆ **Body Structure:** Premium steel housing for safety and reliability; stainless steel chamber for durability and easy cleaning.



◆ **Safety Protection:** Rotor recognition system. (Optional function) It contains various safety protections including lid locking and holding during rotor on, over speed, over temp., unbalance. The electronic lock ensures its safety and reliability during running.



## Specification

Model	CFG-16D
Max. Speed	16000 r/min
Max. RCF	17800×g
Max. Capacity	10×5ml
No.16 Angle Rotor	18×0.5ml(16000r/min)RCF:17800×g
No.17 Angle Rotor	12×1.5/2.0ml(16000r/min)RCF:17800×g
No.26 Angle Rotor	8×5ml(13000r/min)RCF:10000×g
Speed Accuracy	±30r/min
Time Range	0~99min
Sound Emission	≤58dB
Motor	Brushless DC motor and microcomputer controlled
Electricity	AC 220V 50Hz 8A
Dimension (W*D*H)	330*280*215mm
Weight	15Kg



# High Speed Centrifuge

## CFG-16SY



### Rotor Pictures



### Application

It is suitable for room temperature centrifugal purification and concentration tests of intracellular chemicals, microorganisms, viruses, subcellular cells, bacterial bodies, etc. in animal and plant molecular biology.

### Specification

Model	CFG-16SY
Max. Speed	16000rpm
Max. RCF	20600×g
Max. Capacity	6×100ml Angle rotor
Timer	1s~99h59min59s
Speed Accuracy	±10rpm
Sound Emission	≤62dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	510*370*320mm
N.W./G.W.	42kg/50kg
Package Dimension	715*435*420mm

### Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, the high-definition touch screen "Intelligent System" version displays both setting parameters and real-time parameters: Speed, RCF, Time, Acceleration/Deceleration gear, Rotor No., Door cover status, etc.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple.
- ◆ Aero forged aluminum rotors (except multi-tube frame rotors) and various Teflon adapters are available.
- ◆ Can store and call 100 sets of programs, with 9 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.
- ◆ Optional: Automatic recognition of rotor magnetism to avoid misoperation and over-speed operation.

### Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF
No.05105	Angle rotor	15000rpm	30×0.5ml	18510×g
No.05106	Angle rotor	14000rpm	40×0.5ml	19970×g
No.05101	Angle rotor	16000rpm	12×1.5/2ml	17940×g
No.05102	Angle rotor	15000rpm	24×1.5/2m	20600×g
No.05103	Angle rotor	13500rpm	30×1.5/2ml	19340×g
No.05104	Angle rotor	13000rpm	48×1.5/2ml	17930×g
No.05107	Angle rotor	15000rpm	16×5ml	19350×g
No.05108	Angle rotor	14000rpm	12×7ml	16370×g
No.05109	Angle rotor	14000rpm	6×10ml	16460×g
No.05110	Angle rotor	12000rpm	12×10ml	14510×g
No.05113	Angle rotor	11000rpm	8×15ml	12730×g
No.05114	Angle rotor	10000rpm	12×15ml	11840×g
No.05116	Angle rotor	12000rpm	8×20m	14510×g
No.05117	Angle rotor	12000rpm	6×30m	14000×g
No.05120	Angle rotor	11000rpm	6×50m	13480×g
No.05122	Angle rotor	7000rpm	8×50m	6190×g
No.05128	Angle rotor	10000rpm	4×100ml	10310×g
No.05129	Angle rotor	10000rpm	6×100ml	11380×g
No.05140	Angle rotor	5000rpm	24×15ml	3500×g
No.05224	Swing rotor	15000rpm	4×5ml	19920×g
No.05216	Swing rotor	4000rpm	2×3×48 well	2300×g

High Speed Centrifuge

CFG-18.5BP



Application

It is widely used in clinical medicine, biochemistry, genetic engineering, immunology and other fields. It is an essential equipment for centrifuge separation in hospitals, scientific research units and universities at all levels.



Rotor Configuration

Product Name	Model & Specification	Max. Speed	Max. RCF
High Speed Centrifuge	CFG-18.5BP	18500r /min	23797 ×g
No.1 Angle rotor	1.5ml/2.2ml×12	18500r /min	23797 ×g
No.2 Angle rotor	5ml×10	13000 r/min	11400 ×g
No.2 Angle rotor	5ml×12	13000 r/min	11400 ×g
No.3 Angle rotor	10ml×12	12000 r/min	14800 ×g
No.3 Angle rotor	15ml×8	12000 r/min	14800 ×g
No.4 Angle rotor	50ml×6 (round bottom)	12000 r/min	13000 ×g
No.4 Angle rotor	100ml×4	12000 r/min	13000 ×g
No.5 Angle rotor	50ml×6 (conical)	11000 r/min	13000 ×g
No.6 Angle rotor	1.5ml/2.2ml×36	13000 r/min	16211 × g
No.7 Angle rotor	1.5ml/2.2ml×24	15000 r/min	21083 × g
No.8 Angle rotor	0.5ml×36	16000 r/min	23669 × g
No.8 Angle rotor	0.5ml×48	16000 r/min	23669 × g
No.9 Angle rotor	1.5ml/2.2ml×48	13000 r/min	18505 × g
No.10 Angle rotor	0.2ml×8×6 PCR tube	13000r/min	16020 × g
No.11 Swing (Microplate) Rotor	2×48 wells	3000r/min	1400×g
NO.12 Angle rotor	15ml×12	12000r/min	13527×g

Features

- ◆ 5-inch high-definition true color touch screen control, easy to operate, intuitive display, setting parameters and real-time operating parameters can be displayed on the same screen.
- ◆ Ultra-large capacity data storage and fault records and other information; Can store more than 5,000 historical records; It is convenient for users to track historical operation data information, and USB export data is optional.
- ◆ Users can customize the naming and editing of 99 step centrifugation programs, each with a total of 10 stages of centrifugation process, meeting diverse experimental needs.
- ◆ It has program mode, curve mode, preset program calling function, and three-level password control function to ensure the safety and reliability of the instrument and facilitate refined management. The system can record the speed, temperature, and acceleration and deceleration curves of the last operation.
- ◆ With 9 levels acceleration and 10 levels deceleration curves; The acceleration and deceleration time can be set as needed to achieve the best centrifugal effect.
- ◆ Some rotors can achieve fast acceleration and fast deceleration.
- ◆ With rotor recognition function, it automatically identifies 16 different rotors to prevent users from setting incorrect rotor number parameters.
- ◆ Aluminum alloy rotor, durable and autoclavable.
- ◆ With various protection functions such as door cover protection and over-speed protection to ensure the safe operation of the instrument.

Specification

Model	CFG-18.5BP
Max. Speed	18500r/min
Max. RCF	23797×g
Max. Capacity	100ml×4
Speed Accuracy	± 10r/min
Timing Range	1 s -99min 59s or 1min -99h59min
Sound Emission	< 65dB (A)
Electricity	AC 220V, 50Hz, 10A
Power	700W
External Dimension(L*W*H)	340*460*330mm
N.W./G.W.(kg)	32kg/44kg
Package Dimension (W*D*H) (mm)	630*520*520

High Speed Centrifuge

CFG-18.5JP



Description

The centrifuge adopts microcomputer control, large-screen color LCD display, and full touch-screen operation interface to directly set the working program, RCF, speed, time, acceleration and deceleration, and rotor model.



Rotor Configuration

Rotor	Capacity	Max. Speed	Max.RCF
H0.136	Blood Capillary L75mmx36 tube	12000rpm	16904xg
H0.232	0.2mlx4x8tube	13500rpm	14059xg
H0.264	0.2mlx8x8tube	13000rpm	14926xg
H0.512	0.5mlx12	18800rpm	18967xg
H0.524	0.5mlx24	18800rpm	26870xg
H0.548	0.5mlx48	13000rpm	14737xg
H0212	1.5/2.2mlx12	18800rpm	26870xg
H0224	1.5/2.2mlx24	15800rpm	24365xg
H0312	3mlx12 Vacuum test tube	8000rpm	4866xg
H0512	5mlx12	16000rpm	19462xg
H0712	5mlx12 Vacuum test tube	8000rpm	7119xg
H1012	10mlx12	13500rpm	17645xg
H0612	5mlx12 Cryogenic vials	13000rpm	16155xg

Features

- ◆ Brushless AC variable frequency motor drive and special drive module ensure the reliability of the circuit.
- ◆ Double door cover lock system, starting means locking, ensuring safe operation.
- ◆ Provides 20 kinds of working program storage, users can freely program and call their working parameters, which is easy to use and improves work efficiency.
- ◆ Two timing functions: at set rpm and start timing, and the jog is short spin function.
- ◆ Differential centrifugation: Five differential centrifugation programs are reserved, and users can set them according to their needs.
- ◆ Double-layer steel structure and stainless steel centrifugal chamber to avoid corrosion.
- ◆ Automatic balance and imbalance protection. When an error or imbalance occurs, an audible alarm signal will be issued and the centrifuge will automatically stop running.
- ◆ Easily adjust speed, RCF, time and temperature during operation without stopping.
- ◆ Braking function that can effectively prevent samples from being resuspended and protect sensitive samples.
- ◆ Multi-stage damping design ensures the best sample centrifugation effect.
- ◆ Countdown function: Countdown in seconds and display remaining working time in real time.
- ◆ Automatically recognizes the magnetic rotor, no need to manually set the rotor model, and has overspeed protection.
- ◆ The rotor can be autoclaved at 121°C for more than 2 hours. Airtight angle rotor with high biological safety.

Specification

Model	CFG-18.5JP
Max.Speed	18800rpm
Max.RCF	26870xg
Max.Capacity	10mlx12
Speed Accuracy	±10rpm
Timing Range	1s~99h59min59s/Jog (short spin)
Sound Emission	≤58dB
Electricity	AC 220V, 50Hz, 10A
Power	400W
Dimension(W*D*H)	426*322*340mm
N.W./G.W.	28kg/31kg
Package Dimension(W*D*H)	490*430*480mm



# High Speed Centrifuge

## Large Capacity, Benchtop

CFG-20.5B



### Features:

- ◆ This multipurpose centrifuge has advanced and intelligent technology.
- ◆ Microcomputer control, LCD touching screen display.
- ◆ It has 10 files of acceleration and deceleration level for your choice.
- ◆ New electronical lock ensure the safety spin.
- ◆ There are over-speed safety device, over-temperature safety device and automatic alarm device.



### Specification





















Model	CFG-20.5B
Speed Centrifuge	High Speed Centrifuge
Max speed	20500r/min
Max RCF	29200×g
Max capacity	750ml×4
Speed accuracy	± 50r/min
Time setting	1min~99h 59min
Noise	<65db(A)
Power supply	110V/60Hz ,220V/50Hz
Dimension(L*W*H)	545mm×660mm×490mm
Package Dimension (W*D*H)(mm)	750mm×690mm×680mm
N.W./ G.W.(kg)	72/125








### Accessories Center











NO.9  Max Speed: 5000r/min Max. RCF:5030×g	 50ml×2×4 Bucket	Adapters:1.5ml×2 5ml/7ml vacuum tube 5ml, 10ml , 15ml, 20ml
	 15ml×8×4 Bucket	Adapters:1.5ml , 5ml 5ml/7ml vacuum tube 10ml



Model	NO.1	NO.2	NO.3	NO.7	NO.8
Rotor capacity	1.5ml/2.2ml×12	10ml×12	50ml×6	1.5ml/2.2ml×24	100ml×4
Max. speed	20500r/min	15000r/min	13000r/min	16500r/min	11000r/min
Max. RCF	29200×g	23120×g	17940×g	24890×g	11720×g
Adapters	0.2ml,0.5ml	1.5ml,5ml	15ml,20ml	0.2ml,0.5ml	10ml,20ml

<div>No.4</div> <div></div> <div>Rotor capacity:500ml×4</div> <div>Max. RCF:4000r/min</div> <div>Max. RCF:3220×g</div> <div></div>	<div></div> <div>Bucket</div>	<div></div> <div>1.5ml×25×4</div>	<div></div> <div>5ml×28×4 Vacuum Tube</div>	<div></div> <div>50ml×4×4</div>
	<div></div> <div>500ml Bucket</div>	<div></div> <div>10ml×20×4</div>	<div></div> <div>15ml×10×4</div>	<div></div> <div>250ml×4</div>
	<div></div> <div>500ml Bottle</div>	<div></div> <div>5ml/7ml×28×4 Vacuum Tube</div>	<div></div> <div>15ml×8×4</div>	<div></div> <div>20ml×9×4</div>
		<div></div> <div>50ml×4×4</div>	<div></div> <div>100ml×2×4</div>	<div></div> <div>300ml×4</div>
<div></div> <div>Name:Microplate Bucket</div> <div>Capacity:4×2×96 well</div>	<div></div> <div>4×24×5ml Vacuum Tube</div>	<div></div> <div>4×37×7ml G RIA Tubes</div>		

No.4  Rotor capacity:4×2×96 well Max. RCF:4000r/min Max. RCF:3040×g	 4×2×96 well Microplate Bucket	 1.5ml×25×4	 5ml×28×4 Vacuum Tube	 10ml×20×4 Internal Thread
		 15ml×10×4	 50ml×4×4	It is customizable

NO.9  Rotor capacity:250ml×4 Max. RCF:5000r/min Max. RCF:5030×g	 250ml ×4   250ml Bottle	 1.5ml×9×4	 5ml×7×4	 5ml/7ml×9×4 Blood Vacuum Tube
		 10ml×7×4 Internal Thread	 15ml×5×4	 20ml×4×4
		 50ml×4	 100ml×4	



# High Speed Centrifuge

CFG-21BY



### Application

The high speed centrifuge is used for bacteria, protein precipitation, nucleic acid extraction, subcellular component separation, clinical test sample processing, blood, suitable for medical, life sciences, biopharmaceutical, agricultural sciences, environmental protection and other scientific research units, as well as universities and colleges.

### Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, eye-catching red digital LED display, key programming, and parameter modification during operation.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple.
- ◆ Aero aluminum rotors (except multi-tube frame rotors) and various Teflon adapters are available.
- ◆ 10 acceleration rates and 10 deceleration rates for users to choose to achieve the best centrifugal effect.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.
- ◆ The instrument door cover is equipped with a hydraulic rod to reduce operating load.
- ◆ There will be a sound signal prompt at the end of each process.
- ◆ There will be a corresponding error code when there is an error during operation.
- ◆ There is a continuous operation mode.

### Specification

Model	CFG-21BY
Max. Speed	21000rpm
Max. RCF	30910×g
Max. Capacity	4×800ml Swing Rotor
Timer	1~99min
Speed Accuracy	±10rpm
Sound Emission	≤68dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	680*500*385mm
N.W./G.W.	67kg/90kg
Package Dimension	880*580*560mm

### Rotor Pictures



### CFG-21BY Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05105	Angle rotor	18000rpm	30×0.5ml	26660×g	Optional
No.05106	Angle rotor	15000rpm	40×0.5ml	22930×g	Optional
No.05101	Angle rotor	21000rpm	12×1.5/2ml	30910×g	Optional
No.05102	Angle rotor	18000rpm	24×1.5/2ml	29670×g	Optional
No.05103	Angle rotor	13500rpm	30×1.5/2ml	19340×g	Optional
No.05104	Angle rotor	13000rpm	48×1.5/2ml	17930×g	Optional
No.05107	Angle rotor	16000rpm	16×5ml	22020×g	Optional
No.05108	Angle rotor	16000rpm	12×7ml	21380×g	Optional
No.05109	Angle rotor	16000rpm	6×10ml	21500×g	Optional
No.05110	Angle rotor	15000rpm	12×10ml	22680×g	Optional
No.05113	Angle rotor	13000rpm	8×15ml	17790×g	Falcon
No.05114	Angle rotor	10000rpm	12×15ml	11840×g	Falcon

CFG-21BY Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05116	Angle rotor	12000rpm	8×20ml	14510×g	Optional
No.05117	Angle rotor	14000rpm	6×30ml	19060×g	Optional
No.05120	Angle rotor	13000rpm	6×50ml	18840×g	Optional
No.05122	Angle rotor	8000rpm	8×50ml	8090×g	Optional
	Angle rotor	5000rpm	12×50ml	3860×g	
	Angle rotor	5000rpm	24×50ml	4640×g	
No.05128	Angle rotor	12000rpm	4×100ml	14850×g	Optional
No.05129	Angle rotor	12000rpm	6×100ml	16390×g	Optional
No.05131	Angle rotor	8000rpm	4×250ml	9090×g	Optional
No.05132	Angle rotor	7000rpm	6×250ml	8050×g	Optional
No.05607	Swing rotor	4000rpm	4×25×5/7ml	3450×g	For 2-7ml vacuum tube
	Swing rotor	4000rpm	4×800ml(round)	3450×g	Optional biosafety cover
	Adapter		4×500ml(falcon)		Falcon
	Adapter		4×250ml(falcon)		Falcon
	Adapter		4×24×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×19×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×14×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No.05608	Swing rotor	4000rpm	4×500ml(round)	3530×g	Optional biosafety cover
	Adapter		4×18×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×14×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×9×10/15ml		For 10/15ml tube
	Adapter		4×3×50ml		For 50ml tube
No.05609	Swing rotor	4000rpm	4×500ml(rectangle)	3450×g	Optional biosafety cover
	Adapter		4×20×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×16×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×12×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No.05611	Swing rotor	4000rpm	4×4×96 well	2940×g	Optional
No.05610			4×7×50ml	3470×g	Falcon
No.05629	Swing rotor	5000rpm	4×1×50ml	4730×g	Optional
No.05630		4000rpm	4×1×100ml	4730×g	Optional
No.05635			4×2×100ml	3020×g	Optional
No.05634			4×2×50ml	3200×g	Optional
No.05631			4×8×15ml	3200×g	For 5-15ml
No.05639			4×16×5ml vacuum tube	2530×g	For 2ml vacuum tube
No.05638			4×16×7ml vacuum tube	2890×g	For 5ml vacuum tube
No.05640			4×12×10ml vacuum tube	2880×g	For 10ml vacuum tube
No.05614	Swing rotor	4000rpm	4×30×7ml vacuum tube	3160×g	For 5-7ml vacuum tube
No.05615			4×40×7ml vacuum tube	3270×g	For 5-7ml vacuum tube
No.05618			4×28×10m vacuum tube	3270×g	For 10ml vacuum tube

High Speed Centrifuge

CFG-21SY



Application

The high speed centrifuge is used for bacteria, protein precipitation, nucleic acid extraction, subcellular component separation, clinical test sample processing, blood, suitable for medical, life sciences, biopharmaceutical, agricultural sciences, environmental protection and other scientific research units, as well as universities and colleges.

Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, the high-definition touch screen "Intelligent System" version displays both setting parameters and real-time parameters: Speed, RCF, Time, Acceleration/Deceleration gear, Rotor No., Door cover status, etc.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple.
- ◆ Aero aluminum rotors (except multi-tube frame rotors) and various Teflon adapters are available.
- ◆ Can store and call 100 sets of programs, with 9 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.
- ◆ The instrument door cover is equipped with a hydraulic rod to reduce operating load.
- ◆ Optional: Automatic recognition of rotor magnetism to avoid misoperation and over-speed operation.

Rotor Pictures



Specification

Model	CFG-2ISY
Max. Speed	21000rpm
Max. RCF	30910×g
Max. Capacity	4×800ml Swing rotor
Timer	1s~99h59min59s
Speed Accuracy	±10rpm
Sound Emission	≤68dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	680*500*385mm
N.W./G.W.	67kg/90kg
Package Dimension	880*580*560mm



CFG-2ISY Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05105	Angle rotor	18000rpm	30×0.5ml	26660×g	Optional
No.05106	Angle rotor	15000rpm	40×0.5ml	22930×g	Optional
No.05101	Angle rotor	21000rpm	12×1.5/2ml	30910×g	Optional
No.05102	Angle rotor	18000rpm	24×1.5/2ml	29670×g	Optional
No.05103	Angle rotor	13500rpm	30×1.5/2ml	19340×g	Optional
No.05104	Angle rotor	13000rpm	48×1.5/2ml	17930×g	Optional
No.05107	Angle rotor	16000rpm	16×5ml	22020×g	Optional
No.05108	Angle rotor	16000rpm	12×7ml	21380×g	Optional
No.05109	Angle rotor	16000rpm	6×10ml	21500×g	Optional
No.05110	Angle rotor	15000rpm	12×10ml	22680×g	Optional
No.05113	Angle rotor	13000rpm	8×15ml	17790×g	Falcon
No.05114	Angle rotor	10000rpm	12×15ml	11840×g	Falcon

CFG-2ISY Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05116	Angle rotor	12000rpm	8×20ml	14510×g	Optional
No.05117	Angle rotor	14000rpm	6×30ml	19060×g	Optional
No.05120	Angle rotor	13000rpm	6×50ml	18840×g	Falcon/Round
No.05122	Angle rotor	8000rpm	8×50ml	8090×g	Falcon/Round
No.05128	Angle rotor	12000rpm	4×100ml	14850×g	Optional
No.05129	Angle rotor	12000rpm	6×100ml	16390×g	Optional
No.05131	Angle rotor	8000rpm	4×250ml	9090×g	Optional
No.05132	Angle rotor	7000rpm	6×250ml	8050×g	Optional
No.05607	Swing rotor	4000rpm	4×25×5/7ml	3450×g	For 2-7ml vacuum tube
	Swing rotor	4000rpm	4×800ml(round)	3450×g	Optional biosafety cover
	Adapter		4×250ml(falcon)		Falcon
	Adapter		4×24×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×19×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×14×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No.05608	Swing rotor	4000rpm	4×500ml(round)	3530×g	Optional biosafety cover
	Adapter		4×18×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×14×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×9×10/15ml		For 10/15ml tube
	Adapter		4×3×50ml		For 50ml tube
No.05609	Swing rotor	4000rpm	4×500ml(rectangle)	3450×g	Optional biosafety cover
	Adapter		4×20×5/7ml		For 2-7ml vacuum tube
	Adapter		4×16×10ml		For 10ml vacuum tube
	Adapter		4×12×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No.05611	Swing rotor	4000rpm	4×4×96 well	2940×g	Optional
No.05610			4×7×50ml	3470×g	Falcon
No.05629		5000rpm	4×1×50ml	4730×g	Optional
No.05630			4×1×100ml	4730×g	Optional
No.05635		4000rpm	4×2×100ml	3020×g	Optional
No.05634			4×2×50ml	3200×g	Optional
No.05631			4×8×15ml	3200×g	For 5-15ml
No.05639			4×16×5ml vacuum tube	2530×g	For 2ml vacuum tube
No.05638			4×16×7ml vacuum tube	2890×g	For 5ml vacuum tube
No.05640			4×12×10ml vacuum tube	2880×g	For 10ml vacuum tube
No.05614		4000rpm	4×30×7ml vacuum tube	3160×g	For 5ml vacuum tube
No.05615			4×40×7ml vacuum tube	3270×g	For 5ml vacuum tube
No.05618			4×28×10m vacuum tube	3270×g	For 10ml vacuum tube



# High Speed Centrifuge

CFG-21JP



### Description

The centrifuge adopts microcomputer control, large-screen color LCD display, and full touch-screen operation interface to directly set the working program, RCF, speed, time, acceleration and deceleration, and rotor model.



### Features

- ◆ Brushless AC variable frequency motor drive and special drive module ensure the reliability of the circuit.
- ◆ Double door cover lock system, starting means locking, ensuring safe operation.
- ◆ Provides 20 kinds of working program storage, users can freely program and call their working parameters, which is easy to use and improves work efficiency.
- ◆ Provide 15 kinds of acceleration/deceleration; User can set one group of acceleration and deceleration arbitrarily according to the sample requirements.
- ◆ Two timing functions: at set rpm and start timing, and the jog is short spin function.
- ◆ Differential centrifugation: Five differential centrifugation programs are reserved, and users can set them according to their needs.
- ◆ Double-layer steel structure and stainless steel centrifugal chamber to avoid corrosion.
- ◆ Automatic balance and imbalance protection. When an error or imbalance occurs, an audible alarm signal will be issued and the centrifuge will automatically stop running.
- ◆ Easily adjust speed, RCF, time and temperature during operation without stopping.
- ◆ The shortest acceleration / deceleration time≤15s.[H0.512]
- ◆ Countdown function : The countdown in seconds, real time display of remaining working time.
- ◆ The rotor can be autoclaved at 121℃ for more than 2 hours, airtight angle rotor with high biological safety.
- ◆ Can customize 485 communication interface function.

### Specification

Model	CFG-21JP
Max.Speed	21000rpm
Max.RCF	30410xg
Max.Capacity	100mlx6
Speed Accuracy	±10rpm
Timing Range	1s~99h59min59s/Jog (short spin)
Sound Emission	≤58dB
Electricity	AC 220V, 50Hz, 10A
Power	700W
Dimension(W*D*H)	485*370*390mm
N.W./G.W.(kg)	37kg/45kg
Package Dimension (W*D*H) (mm)	620*540*600mm

### Rotor Configuration

Rotor	Capacity	Max. Speed	Max.RCF
H0.136	Blood Capillary L75mmx36tube	14500rpm	24681xg
H0.232	0.2mlx4x8tube	14500rpm	16219xg
H0.264	0.2mlx8x8tube	13000rpm	14926xg
H0.512	0.5mlx12	21000rpm	23666xg
H0.524	0.5mlx24	20000rpm	30410xg
H0.548	0.5mlx48	16000rpm	22324xg
H0212	1.5/2.2mlx12	20000rpm	30410xg
H0224	1.5/2.2mlx24	17500rpm	29890xg
H0236	1.5/2.2mlx36	16000rpm	25473xg
H0248	1.5/2.2mlx48	15500rpm	26672×g
H0312	3mlx12 Vacuum Test Tube	8000rpm	4866×g
H0324	3mlx24 Vacuum Test Tube	7000rpm	4821×g
H0512	5mlx12	17000rpm	21971×g
H0524	5mlx24	13500rpm	17115×g
H0712	5mlx12 Vacuum Test Tube	8000rpm	7119×g
H0724	5mlx24 Vacuum Test Tube	7000rpm	5259xg
H1012	10mlx12	14500rpm	20356xg
H1024	10mlx24	12500rpm	16770xg
H1508	15mlx8	13000rpm	17572xg
H3006	30mlx6	14500rpm	21155xg
H5006	50mlx6	12500rpm	17346xg
H5008	50mlx8	12000rpm	16904xg
H1004	100mlx4	12000rpm	16904xg
H1006	100mlx6	12000rpm	16904xg
NO1 Swing Rotor Cross	10mlx12	5000rpm	3913xg
NO2 Swing Rotor Cross	50mlx4	5000rpm	3913xg
NO3 Swing Rotor Cross	100mlx4	5000rpm	3913xg
NO4 Microplate	48wellx2x2	5000rpm	2432xg



# High Speed Centrifuge

CFG-B18B



### Features

- ◆ **Drive:** Adopt AC variable frequency motor drive, maintenance-free, large torque, fast lifting speed, special combination shock absorber device to make the motor run smoothly.
- ◆ **Display:** Intelligent control, 5-inch LCD touch panel, operating parameters can be automatically memorized, and can be set directly by RCF.
- ◆ **Machine body:** Made of high-quality steel structure, safe and reliable; the stainless steel centrifugal chamber is durable and easy to clean.
- ◆ **Security:** Rotor number identification function(optional), multiple protection functions such as door cover self-locking, over-speed, imbalance, etc., equipped with electronic door lock to ensure safe and reliable operation.
- ◆ **Control:** Can store 15 customized working modes; jog function, short-term centrifugation, convenient for diversified centrifugation.
- ◆ **Acceleration and deceleration:** It has 9 files of acceleration and deceleration level, which can effectively prevent secondary suspension and have a good centrifugal effect.

### Specification

Model	CFG-B18B
Max. Speed	21000 r/min
Max. RCF	30640×g
Max. Capacity	4×750ml
Speed Accuracy	±30r/min
Timing Range	Timing centrifugation: 1min~99 min59sec; Continuous centrifugation: Hold
Motor	AC variable frequency motor, microcomputer control
Sound Emission	≤58dB
Electricity	AC 220V/50Hz,18A
Dimension	458*620*380mm
N.W./G.W.(kg)	55kg/70kg(including 1-2 sets of rotors)
Package Dimension (W*D*H)(mm)	900*440*530mm

### Application

This series of centrifuges are advanced intelligent instruments, widely used in biochemistry, medical and health, food safety, life sciences, agriculture and forestry sciences, animal husbandry sciences, blood banks, blood stations, biopharmaceuticals, and other fields.



### Rotor Configuration

Rotor No.	Max. Speed (r/min)	Max. RCF(×g)	Max. Capacity
No.1 Angle Rotor	21000	26750	18×0.5ml
No.2 Angle Rotor	21000	30640	12×1.5/2.2ml
No.3 Angle Rotor	16500	24890	24×1.5/2.2ml
No.4 Angle Rotor	15000	25650	32×1.5/2.2ml
No.5 Angle Rotor	15000	24270	48×1.5/2.2ml
No.6 Angle Rotor	16500	19170	12×5ml
No.7 Angle Rotor	15000	23120	12×10ml
No.8 Angle Rotor	15000	23640	6×50ml
No.9 Angle Rotor	12000	15610	8×50ml
No.10 Angle Rotor	15000	23640	8×15ml
No.11 Angle Rotor	14000	22022	12×15ml
No.12 Angle Rotor	13000	18138	4×100ml
No.13 Angle Rotor	10000	11808	6×100ml
No.14 Angle Rotor	16500	24890	4* PCR 8-strip tube
No.15 Swing Rotor	4000	2810	4×4×10ml
			4×6×10ml
			4×8×10ml
No.16 Swing Rotor	4000	2810	4×4×15ml
			4×6×15ml
			4×8×15ml
No.17 Swing Rotor	4000	2810	4×50ml
			4×2×50ml
No.18 Swing Rotor	4000	2810	4×100ml
			4×2×100ml
No.19 Swing Rotor	4200	3500	4×250ml
No.20 Swing Rotor	4000	3040	4×500ml
No.21 Swing Rotor	4000	3180	4×750ml
No.22 Swing Rotor	4200	3500	4×18×5/7ml
No.23 Swing Rotor	4000	3040	4×24×5/7ml
No.24 Microplate Rotor	4000	2300	2×2×96 well
No.25 Microplate Rotor	4000	3040	2×4×96 well

# Benchtop Low Speed Refrigerated Centrifuge

CFGR-5BL



## Description


It is widely used in clinical, biology, genetic engineering, immunology and other fields, and is suitable for separation of solutions such as radioimmunity, water treatment, biology, chemistry, biopharmaceutical, blood product, etc.



## Specification

Model		CFGR-5BL
Max. Speed		6000r/min
Max. RCF		4390×g
Max.Capacity		4×750mL
Motor		AC frequency conversion motor
Speed Accuracy		±30r/min
Time Setting	Timed centrifugation	Timed centrifugation: 1min~99 min59sec
	Continuous centrifugation	Continuous centrifugation: Hold
Temperature Setting		-20℃~+40℃
Temperature Accuracy		±1.0℃
Power Supply		AC220±22V 50/60Hz 16A
Noise		< 60dB(A)
Dimensions(L×D×H)(mm)		720×743×410(mm)
N.W.(kg)/G.W.(kg)		110kg/125kg
Package Dimension (W*D*H)(mm)		960*810*600(mm)

## Advantages

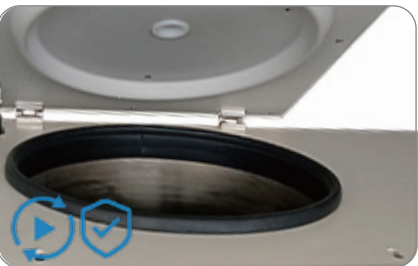

- ◆ 5-inch high-definition touch screen, easy to operate and intuitive display
- ◆ 15 groups of programs can be stored for users to use;
- ◆ Automatically identify 4different rotors to eliminate potential safety hazards caused by user misoperation (Optional function)
- ◆ AC variable frequency motor, high speed control precision, imported environmental protection compressor;
- ◆ Free switching of speed and RCF;
- ◆ It has 9 files of acceleration and10 files of deceleration level, which can effectively prevent secondary suspension and have a good centrifugal effect.
- ◆ There are various protections such as overspeed, door protection, imbalanceprotection, etc. to ensure the safety of human and machine;

## Rotor

NO.	Max speed (r/min)	Max RCF(×g)	Rotor Type	Capacity	Dimension of TestTube (mm)					
NO.1	4000	2810	Swing Rotor	4x2x100ml (It can be equipped with adapter)	Φ37.5×123					
	4000	2810		4x100ml (It can be equipped with adapter)	Φ37.5×123					
	4000	2810		4x2x50ml	Φ29×107					
	4000	2810		4x50ml	Φ29×107					
	4000	2810		4x8x15ml	Φ17×118					
				4x6x15ml	Φ17×118					
				4x4x15ml	Φ17×118					
				4x250ml	Φ62×110					
				4×500ml	Φ80×137					
NO.2	4200	3500	NO.3	4000	3040	NO.4	4000	3180	4×750ml	Φ99×130
NO.5	4000	2000		Microplate Rotor	2×2×96 well plate		Microplate			
NO.6	5500	3170		Angle Rotor	6×50ml		Φ29×120			
NO.7	6000	4390	Angle Rotor	12×10ml	Φ16×83					

# Low Speed Refrigerated Centrifuge

CFGR-5ES



### Application

It is used in medicine, biochemistry, biological products, pharmaceutical industries, etc. to perform separation, precipitation, extraction and other experiments under low temperature conditions.

### Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, the high-definition touch screen "Intelligent System" version displays both setting parameters and real-time parameters: Speed, RCF, Time, Temperature, Acceleration/Deceleration gear, Rotor No., Door cover status, etc.
- ◆ It uses imported customized fluorine-free compressor units, high-quality copper tubes wrapped around the centrifugal chamber, full tin soldering technology, and double-circulation pipelines, which greatly improves the refrigeration efficiency and can reduce the room temperature from 25°C to 4°C within 4 minutes.
- ◆ Use "automatic constant temperature control system adjustment technology" to accurately control temperature.
- ◆ Can store and call 100 sets of programs, with 9 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.

### Specification

Model	CFGR-5ES
Max. Speed	5000rpm
Max. RCF	4420×g
Max. Capacity	4×100ml Swing Rotor
Temperature Range	-20℃~40℃
Timer	1s~99h59min59s
Speed Accuracy	±10rpm
Temperature Accuracy	±1℃
Sound Emission	≤60dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	590*570*340mm
N.W./G.W.	76kg/100kg
Package Dimension	820*660*510mm

### Rotor Pictures



### Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF
No.05629	Swing rotor	5000rpm	4×1×50ml	4420×g
No.05630			4×1×100ml	4420×g
No.05634		4000rpm	4×2×50ml	2820×g
No.05633			4×4×15ml	2820×g
No.05632			4×6×10ml	2580×g
No.05137	Angle rotor	5000rpm	6×15ml	2540×g
No.05139	Angle rotor	5000rpm	12×15ml	3080×g
No.05140	Angle rotor	5000rpm	24×15ml	3500×g
No.05141	Angle rotor	5000rpm	30×15ml	3830×g
No.05142	Angle rotor	5000rpm	4×50ml	2520×g
No.05143	Angle rotor	5000rpm	6×50ml	2850×g
No.05144	Angle rotor	5000rpm	12×50ml	3860×g
No.05146	Angle rotor	5000rpm	4×100ml	2630×g
No.05147	Angle rotor	5000rpm	6×100ml	3130×g
No.05648	Swing rotor	4000rpm	2×2×96 well	2020×g

# Low Speed Refrigerated Centrifuge

CFGR-5EY



### Application

It is used in medicine, biochemistry, biological products, pharmaceutical industries, etc. to perform separation, precipitation, extraction and other experiments under low temperature conditions.

### Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, the high-definition touch screen "Intelligent System" version displays both setting parameters and real-time parameters: Speed, RCF, Time, Temperature, Acceleration/Deceleration gear, Rotor No., Door cover status, etc.
- ◆ It uses imported customized fluorine-free compressor units, high-quality copper tubes wrapped around the centrifugal chamber, full tin soldering technology, and double-circulation pipelines, which greatly improves the refrigeration efficiency and can reduce the room temperature from 25°C to 4°C within 4 minutes.
- ◆ Use "automatic constant temperature control system adjustment technology" to accurately control temperature.
- ◆ Can store and call 100 sets of programs, with 9 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.

### Specification

Model	CFGR-5EY
Max. Speed	5000rpm
Max. RCF	4420×g
Max. Capacity	4×100ml Swing Rotor
Temperature Range	-20℃~40℃
Timer	1min~99h59min
Speed Accuracy	±10rpm
Temperature Accuracy	±1℃
Sound Emission	≤60dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	590*570*340mm
N.W./G.W.	76kg/100kg
Package Dimension	820*660*510mm

### Rotor Pictures



### Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF
No.05629	Swing rotor	5000rpm	4×1×50ml	4420×g
No.05630			4×1×100ml	4420×g
No.05634		4000rpm	4×2×50ml	2820×g
No.05633			4×4×15ml	2820×g
No.05632			4×6×10ml	2580×g
No.05137	Angle rotor	5000rpm	6×15ml	2540×g
No.05139	Angle rotor	5000rpm	12×15ml	3080×g
No.05140	Angle rotor	5000rpm	24×15ml	3500×g
No.05141	Angle rotor	5000rpm	30×15ml	3830×g
No.05142	Angle rotor	5000rpm	4×50ml	2520×g
No.05143	Angle rotor	5000rpm	6×50ml	2850×g
No.05144	Angle rotor	5000rpm	12×50ml	3860×g
No.05146	Angle rotor	5000rpm	4×100ml	2630×g
No.05147	Angle rotor	5000rpm	6×100ml	3130×g
No.05648	Swing rotor	4000rpm	2×2×96 well	2020×g



# Low Speed Refrigerated Centrifuge

CFGR-5MY



## Application

It is used in medicine, biochemistry, biological products, pharmaceutical industries, etc. to perform separation, precipitation, extraction and other experiments under low temperature conditions.

## Rotor Pictures



## Specification

Model	CFGR-5MY
Max. Speed	5000rpm
Max. RCF	4730×g
Max. Capacity	4×800ml Swing rotor
Temperature Range	-20℃~40℃
Timer	1min~99h59min
Speed Accuracy	±10rpm
Temperature Accuracy	±1℃
Sound Emission	≤65dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	675*725*400mm
N.W./G.W.	118kg/148kg
Package Dimension	930*830*580mm

## Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, LED display, and key programming; Real time and simultaneous display of rotor No., Program number, Speed/RCF, Time, Temperature, and Acceleration/Deceleration gear; Parameters can also be modified during operation.
- ◆ It uses imported customized fluorine-free compressor units, high-quality copper tubes wrapped around the centrifugal chamber, full tin soldering technology, and double-circulation pipelines, which greatly improves the refrigeration efficiency and can reduce the room temperature from 25℃ to 4℃ within 4 minutes.
- ◆ Use "automatic constant temperature control system adjustment technology" to accurately control temperature.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple.
- ◆ Can store and call 10 sets of programs, with 10 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.
- ◆ The instrument door cover is equipped with a hydraulic rod to reduce operating load.

CFGR-5MY Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05254	Swing Rotor	4000rpm	4×25×5/7ml	3450×g	For 2-7ml vacuum tube
No.05207	Swing Rotor	4000rpm	4×800ml(round)	3450×g	Optional biosafety cover
	Adapter		4×500ml(falcon)		250ml falcon
	Adapter		4×250ml(falcon)		250ml falcon
	Adapter		4×24×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×19×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×14×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No.05608	Swing Rotor	4000rpm	4×500ml(round)	3530×g	Optional biosafety cover
	Adapter		4×18×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×14×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×9×10/15ml		For 10/15ml tube
	Adapter		4×3×50ml		For 50ml tube
No.05609	Swing Rotor	4000rpm	4×500ml(rectangle)	3450×g	Optional biosafety cover
	Adapter		4×20×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×16×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×12×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No.05611	Swing Rotor	4000rpm	4×4×96 well	2940×g	Optional
No.05610			4×7×50ml	3470×g	For 50ml falcon tube
No.05612			4×600ml(oval)	3530×g	200-500ml Blood Bag
No.05213	Swing Rotor	4000rpm	2×5×96 well	3210×g	Optional
No.05629	Swing Rotor	5000rpm	4×1×50ml	4730×g	Optional
No.05630			4×1×100ml	4730×g	Optional
No.05635			4×2×100ml	3200×g	Optional
No.05634		4000rpm	4×2×50ml	3200×g	Optional
No.05631			4×8×15ml	3200×g	For 5-15ml tube
No.05639			4×16×5ml vacuum tube	2530×g	For 2ml vacuum tube
No.05638			4×16×7ml vacuum tube	2890×g	For 5ml vacuum tube
No.05640			4×12×10ml vacuum tube	2880×g	For 10ml vacuum tube
No.05614	Swing Rotor	4000rpm	4×30×7ml vacuum tube	3160×g	For 5ml vacuum tube
No.05615			4×40×7ml vacuum tube	3270×g	For 5ml vacuum tube
No.05618			4×28×10m vacuum tube	3270×g	For 10ml vacuum tube
No.05237	Swing Rotor	4000rpm	4×Pasteur milk bottle	3830×g	Pasteur milk bottle
No.05183	Angle Rotor	2000rpm	16×Gabor milk fat meter	896×g	For Gabor milk fat meter
No.05141	Angle Rotor	5000rpm	30×15ml	3830×g	Optional
No.05144	Angle Rotor	5000rpm	12×50ml	3860×g	Optional
No.05145	Angle Rotor	4000rpm	24×50ml	2970×g	Optional
No.05148	Angle Rotor	4000rpm	12×100ml	2970×g	Optional

Low Speed Refrigerated Centrifuge



CFGR-5SY



Application

The low speed refrigerated centrifuge is used in the medical, biochemical, biological products, pharmaceutical industry, and other industries for large-scale separation, precipitation, extraction and other experiments at low temperatures.

Rotor Pictures



Specification

Model	CFGR-5SY
Max. Speed	5000rpm
Max. RCF	4730×g
Max. Capacity	4×800ml Swing rotor
Temperature Range	-20℃～40℃
Timer	1s～99h59min59s
Speed Accuracy	±10rpm
Temperature Accuracy	±1℃
Sound Emission	≤65dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	675*725*400mm
N.W./G.W.	118kg/148kg
Package Dimension	930*830*580mm

Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, the high-definition touch screen "Intelligent System" version displays both setting parameters and real-time parameters: Speed, RCF, Time, Temperature, Acceleration/Deceleration gear, Rotor No., Door cover status, etc.
- ◆ It uses imported customized fluorine-free compressor units, high-quality copper tubes wrapped around the centrifugal chamber, full tin soldering technology, and double-circulation pipelines, which greatly improves the refrigeration efficiency and can reduce the room temperature from 25°C to 4°C within 4 minutes.
- ◆ Use "automatic constant temperature control system adjustment technology" to accurately control temperature.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple.
- ◆ Can store and call 100 sets of programs, with 9 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.
- ◆ Optional: Automatic recognition of rotor magnetism to avoid misoperation and over-speed operation.

CFGR-5SY Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05254	Swing Rotor	4000rpm	4×25×5/7ml	3450×g	For 2-7ml vacuum tube
No.05207	Swing Rotor	4000rpm	4×800ml(round)	3450×g	Optional biosafety cover
	Adapter		4×500ml(falcon)		500ml falcon
	Adapter		4×250ml(falcon)		250ml falcon
	Adapter		4×24×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×19×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×14×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No.05608	Swing Rotor	4000rpm	4×500ml(round)	3530×g	Optional biosafety cover
	Adapter		4×18×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×14×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×9×10/15ml		For 10/15ml tube
	Adapter		4×3×50ml		For 50ml tube
No.05609	Swing Rotor	4000rpm	4×500ml(rectangle)	3450×g	Optional biosafety cover
	Adapter		4×20×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×16×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×12×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No.05611	Swing Rotor	4000rpm	4×4×96 well	2940×g	Optional
No.05610			4×7×50ml	3470×g	For 50ml falcon tube
No.05612			4×600ml(oval)	3530×g	200-500ml Blood Bag
No.05213	Swing Rotor	4000rpm	2×5×96 well	3210×g	Optional
No.05629	Swing Rotor	5000rpm	4×1×50ml	4730×g	Optional
No.05630			4×1×100ml	4730×g	Optional
No.05635		4000rpm	4×2×100ml	3200×g	Optional
No.05634			4×2×50ml	3200×g	Optional
No.05631			4×8×15ml	3200×g	For 5-15ml tube
No.05639			4×16×5ml vacuum tube	2530×g	For 2ml vacuum tube
No.05638			4×16×7ml vacuum tube	2890×g	For 5ml vacuum tube
No.05640			4×12×10ml vacuum tube	2880×g	For 10ml vacuum tube
No.05614		4000rpm	4×30×7ml vacuum tube	3160×g	For 5ml vacuum tube
No.05615			4×40×7ml vacuum tube	3270×g	For 5ml vacuum tube
No.05618			4×28×10m vacuum tube	3270×g	For 10ml vacuum tube
No.05237	Swing Rotor	4000rpm	4×Pasteur milk bottle	3830×g	Pasteur milk bottle
No.05183	Angle Rotor	2000rpm	16×Gabor milk fat meter	896×g	For Gabor milk fat meter
No.05141	Angle Rotor	5000rpm	30×15ml	3830×g	Optional
No.05144	Angle Rotor	5000rpm	12×50ml	3860×g	Optional
No.05145	Angle Rotor	4000rpm	24×50ml	2970×g	Optional
No.05148	Angle Rotor	4000rpm	12×100ml	2970×g	Optional



# Low Speed Refrigerated Centrifuge

CFGR-6DL



### Description

This series of centrifuges is an advanced intelligent instrument with large capacity and refrigeration system. It is widely used for technology research and development in the fields of biochemistry, medical care, food safety, farming, blood bank, biological pharmacy, medicine productivity and so on.



### Features:

- Drive:**  
Driven by brushless AC frequency motor with SOFT brake to avoid suspension.
- Rotor:**  
With standby cooling, the rotor remains at the required temperature. Rotors are autoclavable at 121℃ for 20 minutes.
- Speed Control:**  
The acceleration time to the maximum rotational speed is approx 14 s;  
The deceleration time from maximum rotational speed is approx 15 s.
- Cooling:**  
Totally CFC-free compressor with controlling valve for environment protection. It has features such as small vibration, fast cooling, low noise.

### Features:



- Display:**  
Microcomputer controlled with touching pad and LED & LCD display. The programs are stored automatically and RCF can be directly set.
- Control:**  
10 rates of acceleration and deceleration (brake).  
40 programs storage and recall. It offers hold-on and transient functions for diverse centrifugation.



- Body Structure:**  
Premium steel housing and stainless steel chamber.
- Safety Protection:**  
Rotor recognition system. (Optional function)  
It contains various safety protections including lid locking and holding during rotor on, over speed, over temp., unbalance.

### Specification

Model	CFGR-6DL
Max Speed	6000r/min
Max RCF	6680×g
Max Capacity	6×1000ml
No.34 Angle Rotor	6×300ml(6000r/min)RCF:5650×g
No.38 Angle Rotor	6×500ml(6000r/min)RCF:6680×g
No.70 Swing Rotor	6×1000ml(4200r/min)RCF:5100×g (Circular cup)
No.70 Swing Rotor	6×1000ml(4200r/min)RCF:5100×g (Square cup)
Speed Accuracy	±20r/min
Time Setting	1s~99h59min59s
Temp. Range	-20℃~40℃
Temp. Accuracy	±1℃
Compressor	High-performance compressor with CFC-free refrigerant
Noise	≤65dB
Motor	Brushless AC frequency motor and microcomputer control
Power Supply	AC 220V 50Hz 35A
Dimension (W×D×H)	830×720×1250mm
Weight	268kg



# Low Speed Refrigerated Centrifuge

CFGR-6JP



## Description

The centrifuge adopts microcomputer control, large-screen color LCD display, and full touch-screen operation interface to directly set the working program, RCF, speed, time, acceleration and deceleration, and rotor model.



## Rotor Configuration

Rotor	Capacity	Max. Speed	Max.RCF
NO1: Swing Rotor Cross	750mlx4 Adapter:500mlx4, 250ml (round bottom)x4, 250ml(conical)x4, 100mlx12,50ml(conical)x20, 50ml(round bottom)x28, 15ml(conical)x56, 10ml(vacuum tube)x76, 3ml/5ml/7ml(vacuum tube)x96, 5mlx148	4200rpm	3727xg
NO2: Cap Remover Swing Rotor Cross	5mlx96 Adapter: 5mlx96	4200rpm	3727xg
NO3: Anti-pollution Swing Rotor Cross	750mlx4 Adapter:500mlx4, 250ml (round bottom)x4, 100mlx12,50ml(conical)x20, 50ml(round bottom)x28, 15ml(conical)x56, 10ml(vacuum tube)x76, 3ml/5ml/7ml(vacuum tube)x96, 5mlx148	4200rpm	3727xg
NO4: Swing Rotor Cross (honeycomb briquette)	5mlx148 5mlx148	4200rpm	3648xg
NO5: Angle Rotor	50mlx6	6000rpm	5502xg
NO6: Microplate	96well×2 96well×2×2	5000rpm 5000rpm	3530xg 3530xg
NO7: Microplate	96well×4 96well×4×2	4000rpm 4000rpm	3667xg 3667xg

## Features

- ◆ Brushless AC variable frequency motor drive and special drive module ensure the reliability of the circuit.
- ◆ Double door cover lock system, starting means locking, ensuring safe operation.
- ◆ Provides 20 kinds of working program storage, users can freely program and call their working parameters, which is easy to use and improves work efficiency.
- ◆ Provide 15 kinds of acceleration/deceleration; User can set one group of acceleration and deceleration arbitrarily according to the sample requirements.
- ◆ Two timing functions: at set rpm and start timing, and the jog is short spin function.
- ◆ Differential centrifugation: Five differential centrifugation programs are reserved, and users can set them according to their needs.
- ◆ Double-layer steel structure and stainless steel centrifugal chamber to avoid corrosion.
- ◆ Automatic balance and imbalance protection. When an error or imbalance occurs, an audible alarm signal will be issued and the centrifuge will automatically stop running.
- ◆ Easily adjust speed, RCF, time and temperature during operation without stopping.
- ◆ The shortest acceleration / deceleration time≤25s.
- ◆ Countdown function : The countdown in seconds, real time display of remaining working time.
- ◆ The centrifuge chamber is equipped with a condensate drainage hole to prevent water accumulation in the centrifuge chamber.
- ◆ Prefabricated cooling function: In standby mode, the centrifuge can be continuously cooled to the set temperature.
- ◆ Automatic standby function: When the temperature drops to the set temperature, the compressor will automatically standby to reduce energy consumption and extend the life of the compressor.
- ◆ Quick cooling function:When the temperature drops from 21℃ to 4 ℃ of biological zero, the cooling time is≤5 minutes.
- ◆ The rotor can be autoclaved at 121℃ for more than 2 hours. The rotor is a sealed angle and has high biological safety. Airtight angle rotor with high biological safety.
- ◆ Automatically recognizes the magnetic rotor without manually setting the rotor model, and has over-speed protection function.
- ◆ Can customize 485 communication interface function.

## Specification

Model	CFGR-6JP
Max.Speed	6000rpm
Max.RCF	5502xg
Max.Capacity	750mlx4
Speed Accuracy	±10rpm
Temp.Range	-20℃~40℃
Temp.Accuracy	±1℃
Timing Range	1s~99h59min59s/Jog (short spin)
Sound Emission	≤62dB
Electricity	AC 220V, 50Hz, 15A
Power	2000W
Dimension(W*D*H)	750*590*890mm
N.W./G.W.	120kg/160kg
Package Dimension(W*D*H)	830*700*1080mm

# Refrigerated Centrifuge, Large Capacity

CFGR-6Y



### Application

It is widely used in blood stations, pharmaceutical factories, biochemistry, biological products and other production and scientific research units, and is also an ideal instrument for blood separation, protein precipitation, and cell separation and collection.

### Features

#### Accurate speed control

High torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.

The flexible shaft drive system directly drives the rotor to protect the motor, with precise speed control, stable operation, low vibration and low noise.

Precise temperature control using "Automatic thermostatic control system regulation technology".

Adopt imported custom-made CFC-free compressor unit, high-quality copper tube wrapped in centrifugal cavity, full tin welding technology, double-circulation pipeline, improve refrigeration efficiency



#### Ergonomic and structural design

All-steel structure, 304 stainless steel centrifugal chamber, multi-layer protection design; three-stage vibration reduction, automatic balance function.

The door cover of the instrument is equipped with double hydraulic rods to reduce the operation load; the front operation panel, the door cover is opened backwards, which comfortable to operate.

Precise control by microcomputer processor, eye-catching red digital display, button programming;



#### High safety and reliability

Induction automatic electric suction door lock, and emergency door opening device; self-check and protection of door lock, over-speed, over-temperature, unbalance, etc., safe and reliable.

Aeronautical aluminum rotor, surface anti-corrosion, hardening treatment, high strength, fast heat conduction, improve experimental efficiency and protect sample temperature.

10 sets of common programs can be stored and recalled, 10 sets of acceleration rates and 10 sets of deceleration rates for users to choose flexibly to achieve the best centrifugal effect.



### Specification

Model	CFGR-6Y
Max.Speed	6000r/min
Max. RCF	6600×g
Max.Capacity	6×1000ml
Speed Accuracy	±10r/min
Temperature Range	-20℃～40℃
Temperature Accuracy	±1℃
Timer	1～9h59min
Sound Emission	≤65dBA
Electricity	AC220/110V, 50/60Hz
Dimension(L*D*H)	800×740×930mm
Net Weight	310kg
Package Dimension(L*D*H)	1000×880×1350mm

### Matched Rotors

Model	No.30298		No.30223
Rotor type	Swing Rotor	Swing Rotor	Angle rotor
Max. Speed(rpm)	4200	4200	6000
Max. Volume(ml)	6×1000ml(Round cup)	6×1200ml(Elliptic cup)	6×500ml
Max.RCF(×g)	5100×g	5100×g	6600×g
Blood bag adapter(12 bags of 200ml blood bags or 6 bags of 400-500ml blood bags )			

# Low Speed Refrigerated Centrifuge, Benchtop

CFGR-B8B CFGR-B5B



### Features

- ◆ Microcomputer control, DC brushless motor, stable operation, low noise and high speed accuracy.
- ◆ Touching panel, programmable operation, The operation data can be set according to demands and stored automatically.
- ◆ LED display, user-friendly interface, simple and convenient operations.
- ◆ The real-time conversation of Speed and RCF is convenient for operation.
- ◆ It has self-locking device, over-speed safety device, over-temperature safety device, imbalance safety device and automatic alarm device.
- ◆ It has 9 files of acceleration and deceleration level for your choice.
- ◆ Silastic sealed ring comfort to GMP. US FDA certificated.

### Accessories Center

No.1

Rotor Capacity: 250mlx4  
Max Speed: 4300r/min  
Max RCF: 3582xg

250ml Bucket

250ml Bottle

1.5mlx9x4

5mlx7x4

5/7mlx9x4 vacuum tube

10mlx7x4 Internal Thread

15mlx5x4

20mlx4x4

50mlx4

100mlx4

No.3

Rotor Capacity: 100mlx8  
Max Speed: 8000r/min  
Max RCF: 9100xg  
Adapters: 10ml, 20ml

No.1

Rotor Capacity: 100mlx4  
Max Speed: 5000r/min  
Max RCF: 4390xg

No.2

Max Speed: 4000r/min  
Max RCF: 2810xg

50mlx2x4 Bucket

15mlx4x4 Bucket

Adapters: 1.5mlx2 5ml/7ml vacuum tube 6ml, 10ml 15ml, 20ml

Adapters: 1.5ml, 5ml 5ml/7ml vacuum tube 10ml

15mlx6x4 Bucket

15mlx8x4 Bucket

Adapters: 1.5ml, 5ml 5ml/7ml vacuum tube 10ml

No.2

Rotor Capacity: 7mlx72  
Max Speed: 4000r/min  
Max RCF: 2810xg  
Apply to tubes with 81mm length

No.2

Rotor Capacity: 7mlx48  
Max Speed: 4000r/min  
Max RCF: 2810xg

No.4

Rotor Capacity: 8x96 well  
Max Speed: 4000r/min  
Max RCF: 2200xg

### Specifications

Model	CFGR-B8B	CFGR-B5B
Max speed	8000r/min	5000r/min
Max RCF	9100×g	4390×g
Max capacity	250ml×4	15ml×32
Speed accuracy	± 30r/min	
Time setting	1min~99min	
Temperature setting	-5 ~ +35 ℃	
Temperature accuracy	±1 ℃	
Compressor unit	Imported refrigeration Units. Non-CFC R134a	
Noise	<65dB(A)	
Power supply	AC110V/60Hz AC220V/50Hz	
Dimension(L×W×H)	460mm×710mm×420mm	
Packing size(L×W×H)	580mm×730mm×520mm	
Net weight	80kg	



# Low Speed Refrigerated Centrifuge

CFGR-B550JP



## Description

The centrifuge adopts microcomputer control, large-screen color LCD display, and full touch-screen operation interface to directly set the working program, RCF, speed, time, acceleration and deceleration, and rotor model.



## Specification

Model	CFGR-B550JP
Max.Speed	6000rpm
Max.RCF	5502xg
Max.Capacity	300mlx4
Speed Accuracy	±10rpm
Temp.Range	-20℃~40℃
Temp.Accuracy	±1℃
Timing Range	1s~99h59min59s/Jog (short spin)
Sound Emission	≤60dB
Electricity	AC 220V, 50Hz, 15A
Power	1500W
Dimension(W*D*H)	570*615*504mm
N.W./G.W.	95kg/130kg
Package Dimension(W*D*H)	790*790*670mm

## Features

- ◆ Brushless AC variable frequency motor drive and special drive module ensure the reliability of the circuit.
- ◆ Double door cover lock system, starting means locking, ensuring safe operation.
- ◆ Provides 20 kinds of working program storage, users can freely program and call their working parameters, which is easy to use and improves work efficiency.
- ◆ Provide 15 kinds of acceleration/deceleration; User can set one group of acceleration and deceleration arbitrarily according to the sample requirements.
- ◆ Two timing functions: at set rpm and start timing, and the jog is short spin function.
- ◆ Differential centrifugation: Five differential centrifugation programs are reserved, and users can set them according to their needs.
- ◆ Double-layer steel structure and stainless steel centrifugal chamber to avoid corrosion.
- ◆ Automatic balance and imbalance protection. When an error or imbalance occurs, an audible alarm signal will be issued and the centrifuge will automatically stop running.
- ◆ Easily adjust speed, RCF, time and temperature during operation without stopping.
- ◆ The shortest acceleration / deceleration time≤25s.
- ◆ Countdown function : The countdown in seconds, real time display of remaining working time.
- ◆ The centrifuge chamber is equipped with a condensate drainage hole to prevent water accumulation in the centrifuge chamber.
- ◆ Prefabricated cooling function: In standby mode, the centrifuge can be continuously cooled to the set temperature.
- ◆ Automatic standby function: When the temperature drops to the set temperature, the compressor will automatically standby to reduce energy consumption and extend the life of the compressor.
- ◆ Quick cooling function:When the temperature drops from 21℃ to 4℃ of biological zero, the cooling time is≤5 minutes.
- ◆ The rotor can be autoclaved at 121℃ for more than 2 hours. The rotor is a sealed angle and has high biological safety. Airtight angle rotor with high biological safety.
- ◆ Automatically recognizes the magnetic rotor without manually setting the rotor model, and has over-speed protection function.
- ◆ Can customize 485 communication interface function.

## Rotor Configuration

Rotor	Capacity	Max. Speed	Max.RCF
NO1: Swing Rotor Cross	300mlx4	4500rpm	3645xg
	Adapter:250mlx4,100mlx4, 50mlx12 10ml Vacuum Tube x40, 15ml(conical)x20 3/5/7ml Vacuum Tube x56, 5mlx76(RIA tube)		
NO2: Swing Rotor Cross	100mlx4	4500rpm	3645xg
	Adapter: 100mlx4, 50mlx8, 10ml Vacuum Tube x32		
NO3: Low Speed Angle Rotor	50mlx6	6000rpm	5502xg
Microplate	96well×2	5000rpm	3530xg
	96well×2×2	5000rpm	3530xg



# Large Capacity Low Speed Refrigerated Centrifuge

CFGR-B580



Features:

- ◆ This multipurpose centrifuge has advanced and intelligent technology.
- ◆ Rotor automatic recognition.
- ◆ It has 10 files Of acceleration and deceleration level for your choice.
- ◆ Pre-programmed option and memory storage function.
- ◆ The chamber has large space. Many rotors are available and interchangeable.

Specification

Model	CFGR-B580
Max speed	5800r/min
Max RCF	5060×g
Max capacity	750ml×4
Speed accuracy	± 30r/min
Time setting	1min~99h 59min
Temperature setting	-20 ~ +40 ℃
Temperature accuracy	±1 ℃
Compressor unit	Imported refrigeration Units.R404a
Noise	<65dB(A)
Power supply	110V/60Hz ,220V/50Hz
Dimension(L*W*H)	725mm×660mm×440mm
Packing size(L*W*H)	880mm×780mm×620mm
Net weight	75kg



Microcomputer control, LCD large touch screen.

New electronical lock ensure the safety spin. There are over-speed safety device, over-temperature safety device and automatic alarm device.

Rotor(optional)

Rotor Type	Max Speed(rpm)	Max RCF(g)	Max Capacity
Angle Rotor	5800	5060	6×50mL
Angle Rotor	5800	5060	6×50mL(falcon tube)
Swing Rotor	4300	3852	4×250mL
Swing Rotor	4200	3500	6×250mL
Swing Rotor	4000	3040	4×500mL
Swing Rotor(square cup)	4000	3040	4×500mL
Swing Rotor	4000	3780	4×750mL
Swing Rotor(microplate)	4000	2200	2×2×96well
Swing Rotor(microplate)	4000	3040	4×2×96well

# High Speed Refrigerated Centrifuges

CFGR-12BP



### Description

- ◆ It has micro-computer control, electronic lock and AC variable-conversion motor which delivers high torque
- ◆ LCD or LED display and touching panel makes the operation easy
- ◆ The real-time conversation of Speed and RCF is convenient for operation
- ◆ The max speed is 12000rpm and the largest capacity is 2000ml\*4



### Specification

Model	CFGR-12BP
Max speed	12000r/min
Max RCF	19830xg
Max capacity	2000mlx4
Speed accuracy	± 50r/min
Time setting	1min~99h59min
Temperature setting	-20 ~ +40 ℃
Temperature accuracy	±1 ℃
Compressor unit	French Tecumseh Compressor Unit, R404a
Noise	<65dB(A)
Power supply	110V/60Hz 220V /50Hz
Dimension(L*W*H)	710mmx840mmx1140mm
Packing size(L*W*H)	890mmx960mmx1400mm
Net weight	290kg

### Description

Imported compressor unit with Non-CFC.refrigerant It measures up to environmental standards

The machine is programmable The operation data can be stored automatically

It has self-locking device, over-speed safety device, over-temperature safety device, imbalance safety device and automatic alarm device.

It has 10 files of acceleration and deceleration level for your choice.

### Accessories Center

	<b>NO.1</b> Capacity:100ml/85ml×8 Max Speed:12000r/min RCF: 19830×g Adapter rotor:10ml、 20ml		<b>NO.2</b> Capacity: 1000ml×6 Max Speed: 7000r/min RCF: 11600×g Adapter: 100ml、 250ml、 300ml、 500ml
	<b>NO.3</b> Capacity:2000ml×4 Speed: 6000r/min RCF: 8410×g Adapters:250ml、 300ml、 500ml 、 1000ml		<b>NO.4</b> Capacity: 500ml/400ml×6 Speed: 8000r/min RCF:11620×g Adapters:50ml、 100ml、 250ml

# High Speed Refrigerated Centrifuges

CFGR-15D



## Description

- ◆ Precooling, the compressor will automatically start cooling as long as the set temperature is lower than the ambient temperature.
- ◆ Advanced R290 fluorine free refrigerant, low carbon and environmental protection.
- ◆ Temp range:-20℃ - 40℃, fast and powerful cooling capacity, 7 minutes cooling from room temp to 4℃. Temp can kept at max speed.
- ◆ Up to 9 program storage capacity according to experimental needs.
- ◆ Three-layer sealed rotors ensure airtightness and biosafety.
- ◆ High-strength aluminum alloy withstand numerous high temperature and high pressure sterilizations.
- ◆ Five rotors with 0.2mL, 0.5mL, 1.5mL, 2mL and 5mL centrifuge tubes/ PCR tubes capacity.
- ◆ Rotor imbalance detection alarm.

## Description

- Ergonomic electronic lock design, the centrifuge lid can be closed with single finger touch.
- Sound indicator to prompt that the upper cover is closed to maintain the temperature inside the chamber, after centrifugation.
- An external condensation tank prevents water accumulation within the centrifuge chamber.



## Specification

Model	CFGR-15D
Max. Speed	15,000rpm (200-15,000rpm) in 100rpm increments.
Max. RCF	21,380×g, step: 10×g
Capacity	1.5/2mL×24, 0.5mL×36, PCR8×4, 5mL×12, 5mL×18.
Temperature setting	-20℃ - 40℃
Run Time	30s-99 min; HOLD (continuous running)
Acceleration and deceleration time	25s ↑ 25s ↓
Motor Type	DC brushless motor
Safety Performance	Dual door lock, over-speed detection, over-temperature detection with Internal diagnosis system.
Power Requirements	Single-phase, 200V-240V, 50Hz/60Hz, 500W 100V-120V, 50Hz/60Hz, 500W
Noise	≤56dB
Dimensions(mm)	332(width) × 553(depth) × 283(height)
Weight	30 kg
Other functions	Rotation speed/RCF switchover, inching operation, running process indicator, sound alert. Acceleration/deceleration in 9 steps, program storage capacity.
Package Dimension (W*D*H)(mm)	
G.W.(kg)	920*530*530

Available rotors



Cat. No.19500001  
0.2mL rotor adapter  
24 pcs/pk



CAT. NO. 19500002  
0.5mL rotor adapter  
24pcs/pk



CAT. NO. 19500003  
0.2mL rotor adapter  
36pcs/pk

Available rotors  
CFG-15D, CFGR-15D



Rotors Model		CAT. NO. 19400069	CAT. NO. 19400071	CAT. NO. 19400072	CAT. NO. 19400073	CAT. NO. 19400070
Capacity		2×24	0.5×36	0.2×32	5×18	5×12
Hole diameter(mm)		11.2	8.2	6.5	13.7	17.5
Hole diameter(mm)		40.5	29.3	20.4	39	44
Max. tube length (mm)		54.2	36		56.5	
Max. speed		15000rpm				
Max. RCF		21380×g				
Rotor capacity		2mL/1.5mL×24/0.2mL×24/0.5mL×24	0.5mL×36,0.2mL×36	0.2mL/PCR8×4	5mL×18 (Round bottom)	5mL×12(Cone bottom)
Rotor material		Aluminum alloy				
Bio-safe (Bio sealing)		Yes				
Available rotor adapters		CAT. NO. 19500001, CAT. NO. 19500002	CAT. NO. 19500003	-		

Specification

Model	Rotor model	Capacity	Hole diameter (mm)	Hole depth (mm)	Max. tube length (mm)
CFG-Mini15D, CFG-15D, CFGR-15D	Cat. No. 19400010	2×12	11.2	39	47
	CAT. NO. 19400069	2×24	11.2	40.5	54.2
	CAT. NO. 19400071	0.5×36	8.2	29.3	36
	CAT. NO. 19400072	0.2×32	6.5	20.4	36
	CAT. NO. 19400073	5×18	13.7	39	56.5
	CAT. NO. 19400070	5×12	17.5	44	56.5



# High Speed Refrigerated Centrifuge

CFGR-16BY



## Application

The high speed refrigerated centrifuge is used for bacteria, protein precipitation, nucleic acid extraction, subcellular component separation, clinical test sample processing, blood, suitable for medical, life sciences, biopharmaceutical, agricultural sciences, environmental protection and other scientific research units, as well as universities and colleges.

## Specification

Model	CFGR-16BY
Max. Speed	16000rpm
Max. RCF	20600×g
Max. Capacity	6×100ml Angle rotor
Temperature Range	-20℃～40℃
Timer	1min～99h59min
Speed Accuracy	±10rpm
Temperature Accuracy	±1℃
Sound Emission	≤60dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	600*575*370mm
N.W./G.W.	84kg/105kg
Package Dimension	830*670*530mm

## Rotor Pictures



## Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, LED display, and key programming; Real time and simultaneous display of rotor No., Program number, Speed/RCF, Time, Temperature, and Acceleration/Deceleration gear; Parameters can also be modified during operation.
- ◆ It uses imported customized fluorine-free compressor units, high-quality copper tubes wrapped around the centrifugal chamber, full tin soldering technology, and double-circulation pipelines, which greatly improves the refrigeration efficiency and can reduce the room temperature from 25℃ to 4℃ within 4 minutes.
- ◆ Use "automatic constant temperature control system adjustment technology" to accurately control temperature.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple.
- ◆ Can store and call 10 sets of programs, with 10 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.

## Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF
No.05105	Angle rotor	15000rpm	30×0.5ml	18510×g
No.05106	Angle rotor	14000rpm	40×0.5ml	19970×g
No.05101	Angle rotor	16000rpm	12×1.5/2ml	17940×g
No.05102	Angle rotor	15000rpm	24×1.5/2m	20600×g
No.05103	Angle rotor	13500rpm	30×1.5/2ml	19340×g
No.05104	Angle rotor	13000rpm	48×1.5/2ml	17930×g
No.05107	Angle rotor	15000rpm	16×5ml	19350×g
No.05108	Angle rotor	14000rpm	12×7ml	16370×g
No.05109	Angle rotor	14000rpm	6×10ml	16460×g
No.05110	Angle rotor	12000rpm	12×10ml	14510×g
No.05113	Angle rotor	11000rpm	8×15ml	12730×g
No.05114	Angle rotor	10000rpm	12×15ml	11840×g
No.05116	Angle rotor	12000rpm	8×20m	14510×g
No.05117	Angle rotor	12000rpm	6×30m	14000×g
No.05120	Angle rotor	11000rpm	6×50m	13480×g
No.05122	Angle rotor	7000rpm	8×50m	6190×g
No.05128	Angle rotor	10000rpm	4×100ml	10310×g
No.05129	Angle rotor	10000rpm	6×100ml	11380×g
No.05140	Angle rotor	5000rpm	24×15ml	3500×g
No.05224	Swing rotor	15000rpm	4×5ml	19920×g
No.05216	Swing rotor	4000rpm	2×3×48 well	2300×g

# High Speed Refrigerated Centrifuge

## CFGR-16SY



### Application

The high speed refrigerated centrifuge is used for bacteria, protein precipitation, nucleic acid extraction, subcellular component separation, clinical test sample processing, blood, suitable for medical, life sciences, biopharmaceutical, agricultural sciences, environmental protection and other scientific research units, as well as universities and colleges.

### Specification

Model	CFGR-16SY
Max. Speed	16000rpm
Max. RCF	20600×g
Max. Capacity	6×100ml Angle rotor
Temperature Range	-20℃～40℃
Timer	1s～99h59min59s
Speed Accuracy	±10rpm
Temperature Accuracy	±1℃
Sound Emission	≤60dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	600*575*370mm
N.W./G.W.	84kg/105kg
Package Dimension	830*670*530mm

### Rotor Pictures



### Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, the high-definition touch screen "Intelligent System" version displays both setting parameters and real-time parameters: Speed, RCF, Time, Temperature, Acceleration/Deceleration gear, Rotor No., Door cover status, etc.
- ◆ It uses imported customized fluorine-free compressor units, high-quality copper tubes wrapped around the centrifugal chamber, full tin soldering technology, and double-circulation pipelines, which greatly improves the refrigeration efficiency and can reduce the room temperature from 25℃ to 4℃ within 4 minutes.
- ◆ Use "automatic constant temperature control system adjustment technology" to accurately control temperature.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple.
- ◆ Can store and call 100 sets of programs, with 9 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.
- ◆ Optional: Automatic recognition of rotor magnetism to avoid misoperation and over-speed operation.

### Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF
No.05105	Angle rotor	15000rpm	30×0.5ml	18510×g
No.05106	Angle rotor	14000rpm	40×0.5ml	19970×g
No.05101	Angle rotor	16000rpm	12×1.5/2ml	17940×g
No.05102	Angle rotor	15000rpm	24×1.5/2m	20600×g
No.05103	Angle rotor	13500rpm	30×1.5/2ml	19340×g
No.05104	Angle rotor	13000rpm	48×1.5/2ml	17930×g
No.05107	Angle rotor	15000rpm	16×5ml	19350×g
No.05108	Angle rotor	14000rpm	12×7ml	16370×g
No.05109	Angle rotor	14000rpm	6×10ml	16460×g
No.05110	Angle rotor	12000rpm	12×10ml	14510×g
No.05113	Angle rotor	11000rpm	8×15ml	12730×g
No.05114	Angle rotor	10000rpm	12×15ml	11840×g
No.05116	Angle rotor	12000rpm	8×20m	14510×g
No.05117	Angle rotor	12000rpm	6×30m	14000×g
No.05120	Angle rotor	11000rpm	6×50m	13480×g
No.05122	Angle rotor	7000rpm	8×50m	6190×g
No.05128	Angle rotor	10000rpm	4×100ml	10310×g
No.05129	Angle rotor	10000rpm	6×100ml	11380×g
No.05140	Angle rotor	5000rpm	24×15ml	3500×g
No.05224	Swing rotor	15000rpm	4×5ml	19920×g
No.05216	Swing rotor	4000rpm	2×3×48 well	2300×g

# High Speed Refrigerated Centrifuge

CFGR-18.5JP



### Description

The centrifuge adopts microcomputer control, large-screen color LCD display, and full touch-screen operation interface to directly set the working program, RCF, speed, time, acceleration and deceleration, and rotor model.



### Rotor Configuration

Rotor	Capacity	Max. Speed	Max.RCF
H0.136	Blood Capillary 1.75mmx75mm×36 tube	12000rpm	16904xg
H0.232	0.2mlx4x8tube	13500rpm	14059xg
H0.264	0.2mlx8x8tube	13000rpm	14926xg
H0.512	0.5mlx12	18800rpm	18967xg
H0.524	0.5mlx24	18800rpm	26870xg
H0.548	0.5mlx48	13000rpm	14737xg
H0212	1.5/2.2mlx12	18800rpm	26870xg
H0224	1.5/2.2mlx24	15800rpm	24365xg
H0512	5mlx12	16000rpm	19462xg
H0612	5ml(Refrigerated)x12	13000rpm	16155xg
H0712	5mlx12 Vacuum test tube	8000rpm	7119xg
H1012	10mlx12	13500rpm	17645xg

### Features

- ◆ Brushless AC variable frequency motor drive and special drive module ensure the reliability of the circuit.
- ◆ Double door cover lock system, starting means locking, ensuring safe operation.
- ◆ Provides 20 kinds of working program storage, users can freely program and call their working parameters, which is easy to use and improves work efficiency.
- ◆ Provide 15 kinds of acceleration/deceleration; User can set one group of acceleration and deceleration arbitrarily according to the sample requirements.
- ◆ Two timing functions: at set rpm and start timing, and the jog is short spin function.
- ◆ Differential centrifugation: Five differential centrifugation programs are reserved, and users can set them according to their needs.
- ◆ Double-layer steel structure and stainless steel centrifugal chamber to avoid corrosion.
- ◆ Automatic balance and imbalance protection. When an error or imbalance occurs, an audible alarm signal will be issued and the centrifuge will automatically stop running.
- ◆ Easily adjust speed, RCF, time and temperature during operation without stopping.
- ◆ Countdown function : The countdown in seconds, real time display of remaining working time.
- ◆ The centrifuge chamber is equipped with a condensate drainage hole to prevent water accumulation in the centrifuge chamber.
- ◆ Prefabricated cooling function: In standby mode, the centrifuge can be continuously cooled to the set temperature.
- ◆ Automatic standby function: When the temperature drops to the set temperature, the compressor will automatically standby to reduce energy consumption and extend the life of the compressor.
- ◆ Quick cooling function:When the temperature drops from 21℃ to 4 ℃ of biological zero, the cooling time is≤5 minutes.
- ◆ The rotor can be autoclaved at 121℃ for more than 2 hours. The rotor is a sealed angle and has high biological safety. Airtight angle rotor with high biological safety.
- ◆ Automatically recognizes the magnetic rotor without manually setting the rotor model, and has over-speed protection function.

### Specification

Model	CFGR-18.5JP
Max.Speed	18800rpm
Max.RCF	26870xg
Max.Capacity	10mlx12
Speed Accuracy	±10rpm
Temp.Range	-20℃~40℃
Timing Range	1s~99h59min59s/Jog (short spin)
Sound Emission	≤58dB
Electricity	AC 220V, 50Hz, 10A
Power	1000W
Dimension(W*D*H)	613*382*325mm
N.W./G.W.	70kg/88kg
Package Dimension(W*D*H)	770*660*650



# High Speed Refrigerated Centrifuge

## Floor standing, Large Capacity



CFGR-20.5B



Features:

- ◆ The max speed is 20500rpm. and max RCF is 29200g.
- ◆ Imported compressor unit with Non-CFC refrigerant which measures up to environmental standards.
- ◆ The machine is programmable and operation data can be stored automatically
- ◆ It has self-locking device, over-speed safety device, over-temperature safety device, imbalance safety device and automatic alarm device
- ◆ The real-time conversation of speed and RCF is convenient for operation

Specification

Model	CFGR-20.5B
Max speed	20500r/min
Max RCF	29200xg
Max capacity	750mlx4
Speed accuracy	± 50r/min
Time setting	1min~99h59min/1min~99min
Temperature setting	-20 ~ +40℃
Temperature accuracy	±1℃
Compressor unit	French Tecumseh Compressor Unit, R404a
Noise	<65dB(A)
Power supply	110V/60Hz, 220V/50Hz
Dimension(L*W*H)	650mmx710mmx1100mm
Packing size(L*W*H)	880mmx790mmx1360mm
Net weight	170kg
G.W.(kg)	400kg



It has micro-computer control, electronic lock and AC variable-conversion motor which delivers high torque. LCD and LED display touching panel, easy for operation

It has10 files of acceleration and deceleration level for your choice

Accessories Center



Model	NO.1	NO.2	NO.3	NO.5	NO.8	NO.9
Rotor capacity	1.5mL/2.2ml×12	10ml×12	50ml×6	58×96well	1.5ml/2.2ml×24	100ml×4
Max. speed	20500r/min	15000r/min	13000r/min	4000r/min	16500r/min	11000r/min
Max. RCF	29200×g	23120×g	17940×g	2200×g	24890×g	11720×g
Adapters	0.2ml,0.5ml	1.5ml,5ml	15ml,20ml	-	0.2ml,0.5ml	10ml,20ml It is customizable

No.4  Rotor capacity:750ml×4 Max. RCF:4000r/min Max. RCF:3500×g	 750ml Bucket   750ml Bottle	 1.5ml×24×4	 5ml/7ml×24×4 Blood Vacuum Tube	 5ml/7ml×37×4 G RIA Tubes
		 10ml×20×4 Internal Thread	 15ml×14×4	 20ml×12×4
		 50ml×5×4	 100ml×3×4	 250ml×4
		 300ml×4	 500ml×4	

No.6  Rotor capacity:4×2×96 well Max. RCF:4000r/min Max. RCF:3040×g	 4×2×96 well Microplate Bucket	 1.5ml×25×4	 5ml×28×4 Blood Vacuum Tube	 10ml×20×4 Internal Thread
		 15ml×10×4	 50ml×4×4	It is customizable

No.7  Rotor capacity:500ml×4 Max. RCF:4000r/min Max. RCF:3040×g	 500ml Bucket   500ml Bottle	 1.5ml×20×4	 5ml/7ml×20×4 Blood Vacuum Tube	 10ml×15×4 Internal Thread
		 15ml×8×4	 20ml×9×4	 50ml×4×4
		 100ml×2×4	 250ml×4	



# High Speed Refrigerated Centrifuge

CFGR-21BY



## Application

The high speed refrigerated centrifuge is used for bacteria, protein precipitation, nucleic acid extraction, subcellular component separation, clinical test sample processing, blood, suitable for medical, life sciences, biopharmaceutical, agricultural sciences, environmental protection and other scientific research units, as well as universities and colleges.

## Rotor Pictures



## Specification

Model	CFGR-21BY
Max. Speed	21000rpm
Max. RCF	30910×g
Max. Capacity	4×800ml Swing rotor
Temperature Range	-20℃ ~ 40℃
Timer	1min ~ 99h59min
Speed Accuracy	±10rpm
Temperature Accuracy	±1℃
Sound Emission	≤65dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	675*725*400mm
N.W./G.W.	118kg/148kg
Package Dimension	930*830*580mm

## Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, LED display, and key programming; Real time and simultaneous display of rotor No., Program number, Speed/RCF, Time, Temperature, and Acceleration/Deceleration gear; Parameters can also be modified during operation.
- ◆ It uses imported fluorine-free compressor units, high-quality copper tubes wrapped around the centrifugal chamber, full tin soldering technology, and double-circulation pipelines, which greatly improves the refrigeration efficiency and can reduce the room temperature from 25℃ to 4℃ within 4 minutes.
- ◆ Use "automatic constant temperature control system adjustment technology" to accurately control temperature.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple.
- ◆ Can store and call 10 sets of programs, with 10 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.
- ◆ The instrument door cover is equipped with a hydraulic rod to reduce operating load.

## CFGR-21BY Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05105	Angle rotor	18000rpm	30×0.5ml	26660×g	Optional
No.05106	Angle rotor	15000rpm	40×0.5ml	22930×g	Optional
No.05101	Angle rotor	21000rpm	12×1.5/2ml	30910×g	Optional
No.05102	Angle rotor	18000rpm	24×1.5/2ml	29670×g	Optional
No.05103	Angle rotor	13500rpm	30×1.5/2ml	19340×g	Optional
No.05104	Angle rotor	13000rpm	48×1.5/2ml	17930×g	Optional
No.05107	Angle rotor	16000rpm	16×5ml	22020×g	Optional

CFGR-21BY Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05108	Angle rotor	16000rpm	12×7ml	21380×g	Optional
No.05109	Angle rotor	16000rpm	6×10ml	21500×g	Optional
No.05110	Angle rotor	15000rpm	12×10ml	22680×g	Optional
No.05113	Angle rotor	13000rpm	8×15ml	17790×g	Falcon
No.05114	Angle rotor	10000rpm	12×15ml	11840×g	Falcon
No.05116	Angle rotor	12000rpm	8×20ml	14510×g	Optional
No.05117	Angle rotor	14000rpm	6×30ml	19060×g	Optional
No.05120	Angle rotor	13000rpm	6×50ml	18840×g	Optional
No.05122	Angle rotor	8000rpm	8×50ml	8090×g	Optional
No.05128	Angle rotor	12000rpm	4×100ml	14850×g	Optional
No.05129	Angle rotor	12000rpm	6×100ml	16390×g	Optional
No.05131	Angle rotor	8000rpm	4×250ml	9090×g	Optional
No.05132	Angle rotor	7000rpm	6×250ml	8050×g	Optional
No.05607	Swing rotor	4000rpm	4×25×5/7ml	3450×g	For 2-7ml vacuum tube
	Swing rotor	4000rpm	4×800ml(round)	3450×g	Optional biosafety cover
	Adapter		4×500ml(falcon)		Falcon
	Adapter		4×250ml(falcon)		Falcon
	Adapter		4×24×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×19×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×14×10/15ml		For 10/15ml tube
No.05608	Adapter		4×5×50ml		For 50ml tube
	Swing rotor	4000rpm	4×500ml(round)	3530×g	Optional biosafety cover
	Adapter		4×18×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×14×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×9×10/15ml		For 10/15ml tube
No.05609	Adapter		4×3×50ml		For 50ml tube
	Swing rotor	4000rpm	4×500ml(rectangle)	3450×g	Optional biosafety cover
	Adapter		4×20×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×16×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×12×10/15ml		For 10/15ml tube
No.05611	Swing rotor	4000rpm	4×5×50ml		For 50ml tube
			4×4×96 well	2940×g	Optional
			4×7×50ml	3470×g	Falcon
			4×1×50ml	4730×g	Optional
			4×1×100ml	4730×g	Optional
No.05629	Swing rotor	5000rpm	4×2×100ml	3020×g	Optional
No.05630		4000rpm	4×2×50ml	3200×g	Optional
No.05635			4×8×15ml	3200×g	For 5-15ml
No.05634			4×16×5ml vacuum tube	2530×g	For 2ml vacuum tube
No.05631			4×16×7ml vacuum tube	2890×g	For 5ml vacuum tube
No.05639	Swing rotor	4000rpm	4×12×10ml vacuum tube	2880×g	For 10ml vacuum tube
No.05638			4×30×7ml vacuum tube	3160×g	For 5-7ml vacuum tube
No.05640			4×40×7ml vacuum tube	3270×g	For 5-7ml vacuum tube
No.05614			4×28×10m vacuum tube	3270×g	For 10ml vacuum tube
No.05615					
No.05618					

High Speed Refrigerated Centrifuge




CFGR-21SY



Application

The high speed refrigerated centrifuge is used for bacteria, protein precipitation, nucleic acid extraction, subcellular component separation, clinical test sample processing, blood, suitable for medical, life sciences, biopharmaceutical, agricultural sciences, environmental protection and other scientific research units, as well as universities and colleges.

Rotor Pictures

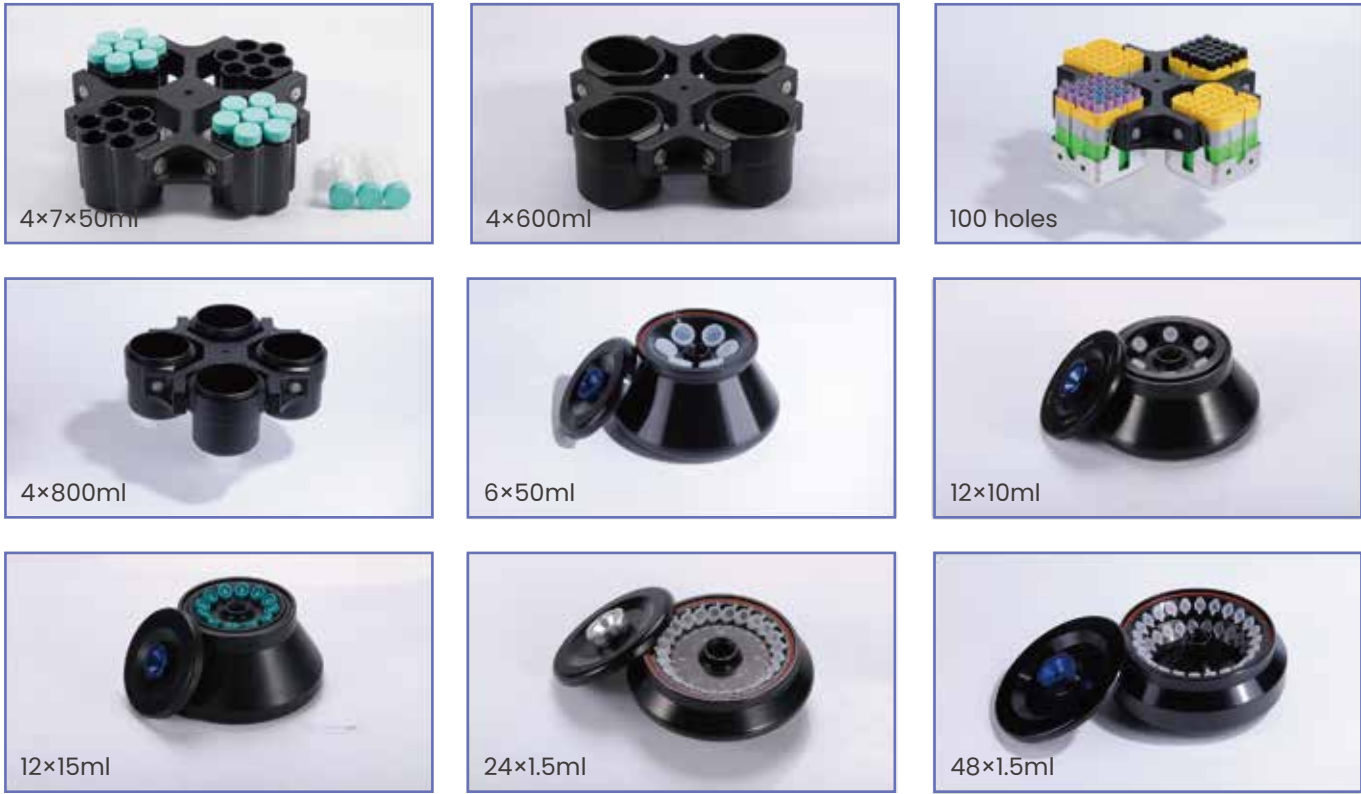

Specification

Model	CFGR-21SY
Max. Speed	21000rpm
Max. RCF	30910×g
Max. Capacity	4×800ml Swing rotor
Temperature Range	-20℃～40℃
Timer	1s～99h59min59s
Speed Accuracy	±10rpm
Temperature Accuracy	±1℃
Sound Emission	≤65dBA
Electricity	AC 110V/220V, 50/60Hz
External Dimension	675*725*400mm
N.W./G.W.	118kg/148kg
Package Dimension	930*830*580mm

Feature

- ◆ Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.
- ◆ Induction automatic electric suction door lock, with emergency door opening device; self-inspection and protection of door lock, over-speed, unbalance, etc., safe and reliable.
- ◆ Using a microcomputer processor for precise control, the high-definition touch screen "Intelligent System" version displays both setting parameters and real-time parameters: Speed, RCF, Time, Temperature, Acceleration/Deceleration gear, Rotor No., Door cover status, etc.
- ◆ It uses imported fluorine-free compressor units, high-quality copper tubes wrapped around the centrifugal chamber, full tin soldering technology, and double-circulation pipelines, which greatly improves the refrigeration efficiency and can reduce the room temperature from 25℃ to 4℃ within 4 minutes.
- ◆ Use "automatic constant temperature control system adjustment technology" to accurately control temperature.
- ◆ Using a unique spring cone sleeve to connect the rotating head and spindle, the rotating head is locked 360°, and the loading and unloading of the rotating head is non directional, fast and simple.
- ◆ Can store and call 100 sets of programs, with 9 acceleration rates and 10 deceleration rate options.
- ◆ The whole machine is all-steel structure, stainless steel centrifugal chamber; multi-layer protection design, three-stage vibration reduction, safe and stable.
- ◆ Optional: Automatic recognition of rotor magnetism to avoid misoperation and over-speed operation.

CFGR-21SY Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05105	Angle rotor	18000rpm	30×0.5ml	26660×g	Optional
No.05106	Angle rotor	15000rpm	40×0.5ml	22930×g	Optional
No.05101	Angle rotor	21000rpm	12×1.5/2ml	30910×g	Optional
No.05102	Angle rotor	18000rpm	24×1.5/2ml	29670×g	Optional
No.05103	Angle rotor	13500rpm	30×1.5/2ml	19340×g	Optional
No.05104	Angle rotor	13000rpm	48×1.5/2ml	17930×g	Optional
No.05107	Angle rotor	16000rpm	16×5ml	22020×g	Optional

CFGR-21SY Matched Rotors

Rotor No.	Rotor Type	Max. Speed	Max. Capacity	Max. RCF	Notes
No.05108	Angle rotor	16000rpm	12×7ml	21380×g	Optional
No.05109	Angle rotor	16000rpm	6×10ml	21500×g	Optional
No.05110	Angle rotor	15000rpm	12×10ml	22680×g	Optional
No.05113	Angle rotor	13000rpm	8×15ml	17790×g	Falcon
No.05114	Angle rotor	10000rpm	12×15ml	11840×g	Falcon
No.05116	Angle rotor	12000rpm	8×20ml	14510×g	Optional
No.05117	Angle rotor	14000rpm	6×30ml	19060×g	Optional
No.05120	Angle rotor	13000rpm	6×50ml	18840×g	Optional
No.05122	Angle rotor	8000rpm	8×50ml	8090×g	Optional
No.05128	Angle rotor	12000rpm	4×100ml	14850×g	Optional
No.05129	Angle rotor	12000rpm	6×100ml	16390×g	Optional
No.05131	Angle rotor	8000rpm	4×250ml	9090×g	Optional
No.05132	Angle rotor	7000rpm	6×250ml	8050×g	Optional
No.05607	Swing rotor	4000rpm	4×25×5/7ml	3450×g	For 2-7ml vacuum tube
	Swing rotor	4000rpm	4×800ml(round)	3450×g	Optional biosafety cover
	Adapter		4×500ml(falcon)		Falcon
	Adapter		4×250ml(falcon)		Falcon
	Adapter		4×24×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×19×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×14×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No.05608	Swing rotor	4000rpm	4×500ml(round)	3530×g	Optional biosafety cover
	Adapter		4×18×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×14×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×9×10/15ml		For 10/15ml tube
	Adapter		4×3×50ml		For 50ml tube
No.05609	Swing rotor	4000rpm	4×500ml(rectangle)	3450×g	Optional biosafety cover
	Adapter		4×20×5/7ml vacuum tube		For 2-7ml vacuum tube
	Adapter		4×16×10ml vacuum tube		For 10ml vacuum tube
	Adapter		4×12×10/15ml		For 10/15ml tube
	Adapter		4×5×50ml		For 50ml tube
No.05611	Swing rotor	4000rpm	4×4×96 well	2940×g	Optional
No.05610			4×7×50ml	3470×g	Falcon
No.05629		5000rpm	4×1×50ml	4730×g	Optional
No.05630			4×1×100ml	4730×g	Optional
No.05635			4×2×100ml	3020×g	Optional
No.05634	Swing rotor	4000rpm	4×2×50ml	3200×g	Optional
No.05631			4×8×15ml	3200×g	For 5-15ml
No.05639			4×16×5ml vacuum tube	2530×g	For 2ml vacuum tube
No.05638			4×16×7ml vacuum tube	2890×g	For 5ml vacuum tube
No.05640			4×12×10ml vacuum tube	2880×g	For 10ml vacuum tube
No.05614	Swing rotor	4000rpm	4×30×7ml vacuum tube	3160×g	For 5-7ml vacuum tube
No.05615			4×40×7ml vacuum tube	3270×g	For 5-7ml vacuum tube
No.05618			4×28×10m vacuum tube	3270×g	For 10ml vacuum tube



# High Speed Refrigerated Centrifuge

CFGR-23JP

## Description

The centrifuge adopts microcomputer control, large-screen color LCD display, and full touch-screen operation interface to directly set the working program, RCF, speed, time, acceleration and deceleration, and rotor model.



## Rotor Configuration

Rotor	Capacity	Max. Speed	Max.RCF
H0.136	Blood Capillary L75mmx36 tube	12000rpm	16904xg
H0.232	0.2mlx4x8tube	14500rpm	16219xg
H0.264	0.2mlx8x8tube	13000rpm	14926xg
H0.512	0.5mlx12	23000rpm	28388xg
H0.524	0.5mlx24	22000rpm	36796xg
H0.548	0.5mlx48	16000rpm	22324xg
H0212	1.5/2.2mlx12	22000rpm	36796xg
H0224	1.5/2.2mlx24	17500rpm	29890xg
H0236	1.5/2.2mlx36	16000rpm	25473xg
H0248	1.5/2.2mlx48	15500rpm	26672xg
H0312	3mlx12 Vacuum Test Tube	8000rpm	4866xg
H0324	3mlx24 Vacuum Test Tube	7000rpm	4821xg
H0512	5mlx12	17000rpm	21971xg
H0524	5mlx24	13500rpm	17115xg
H0712	5mlx12 Vacuum Test Tube	8000rpm	7119xg
H0724	5mlx24 Vacuum Test Tube	7000rpm	5259xg
H1012	10mlx12	15500rpm	23261xg
H1024	10mlx24	12500rpm	16770xg
H1508	15mlx8	13000rpm	17572xg
H3006	30mlx6	15000rpm	22640xg
H5006	50mlx6	13000rpm	18762xg
H5008	50mlx8	12000rpm	16904xg
H1004	100mlx4	12000rpm	16904xg
H1006	100mlx6	12000rpm	16904xg
NO1: Swing Rotor Cross	50mlx4	5000rpm	3913xg
NO2: Swing Rotor Cross	100mlx4	5000rpm	3913xg
NO3: Swing Rotor Cross	10mlx12	5000rpm	3913xg
NO4: Swing Rotor Cross	15mlx4	5000rpm	3913xg
NO5: Swing Rotor Cross	48wellx2x2	5000rpm	2432xg

## Features

- ◆ Brushless AC variable frequency motor drive and special drive module ensure the reliability of the circuit.
- ◆ Double door cover lock system, starting means locking, ensuring safe operation.
- ◆ Provides 20 kinds of working program storage, users can freely program and call their working parameters, which is easy to use and improves work efficiency.
- ◆ Provide 15 kinds of acceleration/deceleration; User can set one group of acceleration and deceleration arbitrarily according to the sample requirements.
- ◆ Two timing functions: at set rpm and start timing, and the jog is short spin function.
- ◆ Differential centrifugation: Five differential centrifugation programs are reserved, and users can set them according to their needs.
- ◆ Double-layer steel structure and stainless steel centrifugal chamber to avoid corrosion.
- ◆ Automatic balance and imbalance protection. When an error or imbalance occurs, an audible alarm signal will be issued and the centrifuge will automatically stop running.
- ◆ Easily adjust speed, RCF, time and temperature during operation without stopping.
- ◆ The shortest acceleration / deceleration time≤15s[H0.512].
- ◆ Countdown function : The countdown in seconds, real time display of remaining working time.
- ◆ The centrifuge chamber is equipped with a condensate drainage hole to prevent water accumulation in the centrifuge chamber.
- ◆ Prefabricated cooling function: In standby mode, the centrifuge can be continuously cooled to the set temperature.
- ◆ Automatic standby function: When the temperature drops to the set temperature, the compressor will automatically standby to reduce energy consumption and extend the life of the compressor.
- ◆ Quick cooling function:When the temperature drops from 21℃ to 4℃ of biological zero, the cooling time is≤5 minutes.
- ◆ The rotor can be autoclaved at 121℃ for more than 2 hours. The rotor is a sealed angle and has high biological safety. Airtight angle rotor with high biological safety.
- ◆ Automatically recognizes the magnetic rotor without manually setting the rotor model, and has over-speed protection function.
- ◆ Can customize 485 communication interface function.

## Specification

Model	CFGR-23JP
Max.Speed	23000rpm
Max.RCF	36796xg
Max.Capacity	100mlx6
Speed Accuracy	±10rpm
Temp.Range	-20℃~40℃
Temp.Accuracy	±1℃
Timing Range	1s~99h59min59s/Jog (short spin)
Sound Emission	≤58dB
Electricity	AC 220V, 50Hz, 10A
Power	1500W
Dimension(W*D*H)	670*410*400mm
N.W./G.W.	51kg/70kg
Package Dimension(W*D*H)	770*590*590mm



# High Speed Refrigerated Centrifuge

CFGR-24JLP



### Description

The centrifuge adopts microcomputer control, large-screen color LCD display, and full touch-screen operation interface to directly set the working program, RCF, speed, time, acceleration and deceleration, and rotor model.



### Specification

Model	CFGR-24JLP
Max.Speed	24000rpm
Max.RCF	40217xg
Max.Capacity	750mlx4
Speed Accuracy	±10rpm
Temp.Range	-20℃~40℃
Temp.Accuracy	±1℃
Timing Range	1s~99h59min59s/Jog (short spin)
Sound Emission	≤ 58dB
Electricity	AC 220V, 50Hz, 10A
Power	2000W
Dimension(W*D*H)	750*590*890mm
N.W./G.W.	125kg/174kg
Package Dimension(W*D*H)	850*710*1060mm

### Features

- ◆ Brushless AC variable frequency motor drive and special drive module ensure the reliability of the circuit.
- ◆ Double door cover lock system, starting means locking, ensuring safe operation.
- ◆ Provides 20 kinds of working program storage, users can freely program and call their working parameters, which is easy to use and improves work efficiency.
- ◆ Provide 15 kinds of acceleration/deceleration; User can set one group of acceleration and deceleration arbitrarily according to the sample requirements.
- ◆ Two timing functions: at set rpm and start timing, and the jog is short spin function.
- ◆ Differential centrifugation: Five differential centrifugation programs are reserved, and users can set them according to their needs.
- ◆ Double-layer steel structure and stainless steel centrifugal chamber to avoid corrosion.
- ◆ Automatic balance and imbalance protection. When an error or imbalance occurs, an audible alarm signal will be issued and the centrifuge will automatically stop running.
- ◆ Easily adjust speed, RCF, time and temperature during operation without stopping.
- ◆ The shortest acceleration / deceleration times≤15s[H0.512].
- ◆ Countdown function : The countdown in seconds, real time display of remaining working time.
- ◆ The centrifuge chamber is equipped with a condensate drainage hole to prevent water accumulation in the centrifuge chamber.
- ◆ Prefabricated cooling function: In standby mode, the centrifuge can be continuously cooled to the set temperature.
- ◆ Automatic standby function: When the temperature drops to the set temperature, the compressor will automatically standby to reduce energy consumption and extend the life of the compressor.
- ◆ Quick cooling function:When the temperature drops from 21℃ to 4℃ of biological zero, the cooling time is≤5 minutes.
- ◆ The rotor can be autoclaved at 121℃ for more than 2 hours. The rotor is a sealed angle and has high biological safety. Airtight angle rotor with high biological safety.
- ◆ Automatically recognizes the magnetic rotor without manually setting the rotor model, and has over-speed protection function.
- ◆ Can customize 485 communication interface function.

Rotor Configuration

Rotor	Capacity	Max. Speed	Max.RCF
H0.136	Blood Capillary 175mmx36 tube	12000rpm	16904×g
H0.232	0.2mlx4x8tube	14500rpm	16219×g
H0.264	0.2mlx8x8tube	13000rpm	14926×g
H0.512	0.5mlx12	24000rpm	30910×g
H0.524	0.5mlx24	23000rpm	40217×g
H0.548	0.5mlx48	16000rpm	22324×g
H0212	1.5/2.2mlx12	23000rpm	40217×g
H0224	1.5/2.2mlx24	17500rpm	29890×g
H0236	1.5/2.2mlx36	16000rpm	25473×g
H0248	1.5/2.2mlx48	15500rpm	26672×g
H0312	3mlx12 Vacuum Test Tube	8000rpm	4866×g
H0324	3mlx24 Vacuum Test Tube	7000rpm	4821×g
H0512	5mlx12	17000rpm	21971×g
H0524	5mlx24	13500rpm	17115×g
H0712	5mlx12 Vacuum Test Tube	8000rpm	7119×g
H0724	5mlx24 Vacuum Test Tube	7000rpm	5259×g
H1012	10mlx12	15500rpm	23261×g
H1024	10mlx24	12500rpm	16770×g
H1508	15mlx8	13000rpm	17572×g
H3006	30mlx6	15000rpm	22640×g
H5006	50mlx6	13000rpm	18762×g
H5008	50mlx8	12000rpm	16904×g
H1004	100mlx4	12000rpm	16904×g
H1006	100mlx6	12000rpm	16904×g
NO1: Swing Rotor Cross	750mlx4	4200rpm	3727×g
	Adapter: 500mlx4, 250mlx4(conyn tube), 100mlx12, 50ml(conical)x20, 50ml(round bottom)x28, 15/20ml(conical)x56, 15ml vacuum test tube x76, 5ml vacuum test tube x96, 5ml((RIA tube))x148		
NO2: Swing Rotor Cross	500mlx4	4200rpm	3451×g
	Adapter: 250mlx4, 100mlx8, 50mlx16, 10ml vacuum test tube x56, 15ml(conical)x40, 3/5/7ml vacuum test tube x68, 5ml((RIA tube))x96		
NO3: Swing Rotor Cross	300mlx4	4500rpm	3645×g
	Adapter: 250mlx4, 100mlx4, 50ml(conical)x12, 10ml vacuum test tube x40, 15ml(conical)x20, 3/5/7ml vacuum test tube x56, 5ml((RIA tube))x76		
NO4: Microplate	96wellx2/96wellx2x2	5000rpm	4081×g
NO5: Microplate	96wellx4/96wellx4x2	4000rpm	3667×g

High Speed Refrigerated Centrifuge



CFGR-24JP

Description

The centrifuge adopts microcomputer control, large-screen color LCD display, and full touch-screen operation interface to directly set the working program, RCF, speed, time, acceleration and deceleration, and rotor model.



Specification

Model	CFGR-24JP
Max.Speed	23500rpm
Max.RCF	38487xg
Max.Capacity	300mlx4
Speed Accuracy	±10rpm
Temp.Range	-20℃~40℃
Temp.Accuracy	±1℃
Timing Range	1s~99h59min59s/Jog (short spin)
Sound Emission	≤ 58dB
Electricity	AC 220V, 50Hz, 10A
Power	1800W
Dimension(W*D*H)	610*570*505mm
N.W./G.W.	93kg/155kg
Package Dimension(W*D*H)	780*700*660mm

Features

- ◆ Brushless AC variable frequency motor drive and special drive module ensure the reliability of the circuit.
- ◆ Double door cover lock system, starting means locking, ensuring safe operation.
- ◆ Provides 20 kinds of working program storage, users can freely program and call their working parameters, which is easy to use and improves work efficiency.
- ◆ Provide 15 kinds of acceleration/deceleration; User can set one group of acceleration and deceleration arbitrarily according to the sample requirements.
- ◆ Two timing functions: at set rpm and start timing, and the jog is short spin function.
- ◆ Differential centrifugation: Five differential centrifugation programs are reserved, and users can set them according to their needs.
- ◆ Double-layer steel structure and stainless steel centrifugal chamber to avoid corrosion.
- ◆ Automatic balance and imbalance protection. When an error or imbalance occurs, an audible alarm signal will be issued and the centrifuge will automatically stop running.
- ◆ Easily adjust speed, RCF, time and temperature during operation without stopping.
- ◆ The shortest acceleration / deceleration time≤15s[H0.512].
- ◆ Countdown function : The countdown in seconds, real time display of remaining working time.
- ◆ The centrifuge chamber is equipped with a condensate drainage hole to prevent water accumulation in the centrifuge chamber.
- ◆ Prefabricated cooling function: In standby mode, the centrifuge can be continuously cooled to the set temperature.
- ◆ Automatic standby function: When the temperature drops to the set temperature, the compressor will automatically standby to reduce energy consumption and extend the life of the compressor.
- ◆ Quick cooling function:When the temperature drops from 21℃ to 4 ℃of biological zero, the cooling time iss≤5 minutes.
- ◆ The rotor can be autoclaved at 121℃ for more than 2 hours. The rotor is a sealed angle and has high biological safety. Airtight angle rotor with high biological safety.
- ◆ Automatically recognizes the magnetic rotor without manually setting the rotor model, and has over-speed protection function.
- ◆ Can customize 485 communication interface function.

Rotor Configuration

Rotor	Capacity	Max. Speed	Max.RCF
H0.136	Blood Capillary L75mmx36tube	12000rpm	16904xg
H0.232	0.2mlx4x8tube	14500rpm	16219xg
H0.264	0.2mlx8x8tube	13000rpm	14926xg
H0.512	0.5mlx12	23500rpm	29636xg
H0.524	0.5mlx24	22500rpm	38487xg
H0.548	0.5mlx48	16000rpm	22324xg
H0212	1.5/2.2mlx12	22500rpm	38487xg
H0224	1.5/2.2mlx24	17500rpm	29890xg
H0236	1.5/2.2mlx36	16000rpm	25473xg
H0248	1.5/2.2mlx48	15500rpm	26672xg
H0312	3mlx12 Vacuum Test Tube	8000rpm	4866xg
H0324	3mlx24 Vacuum Test Tube	7000rpm	4821xg
H0512	5mlx12	17000rpm	21971xg
H0524	5mlx24	13500rpm	17115xg
H0712	5mlx12 Vacuum Test Tube	8000rpm	7119xg
H0724	5mlx24 Vacuum Test Tube	7000rpm	5259xg
H1012	10mlx12	15500rpm	23261xg
H1024	10mlx24	12500rpm	16770xg
H1508	15mlx8	13000rpm	17572xg
H3006	30mlx6	15000rpm	22640xg
H5006	50mlx6	13000rpm	18762xg
H5008	50mlx8	12000rpm	16904xg
H1004	100mlx4	12000rpm	16904xg
H1006	100mlx6	12000rpm	16904xg
NO1: Swing Rotor Cross	100mlx4	5000rpm	4500xg
NO2: Swing Rotor Cross	300mlx4	4500rpm	3645xg
	Adapter: 250mlx4, 100mlx4, 50ml(conical)x12, 10ml Vacuum Test Tubex40 15ml(conical)x20, 3/5/7ml Vacuum Test Tubex56, 5ml((RIA tube))x76		
NO3: Microplate	96wellx2/96wellx2x2	5000rpm	4081xg

# Floor-standing High Speed Refrigerated Centrifuge

CFGR-25BP CFGR-22BP CFGR-21BP



### Description

- ◆ It has micro-computer control, electronic lock and AC variable-conversion motor which delivers high torque
- ◆ LED or LCD display, touching panel makes the operation easy
- ◆ It has self-locking device, over-speed safety device, over-temperature safety device, imbalance safety device and automatic alarm device.



### Specifications

Model	CFGR-25BP	CFGR-22BP	CFGR-21BP
Max speed	25000rpm	22000rpm	21000rpm
Max RCF	64983xg	52000xg	50400xg
Max capacity	1000ml*4	600ml*6	500ml*6
Speed accuracy	± 50r/min		
Time setting	1min~99h59min		
Temperature setting	-20 ~ +40 ℃		
Temperature accuracy	±1 ℃		
Compressor unit	French Tecumseh Compressor Unit, R404a		
Noise	<65dB (A)		
Power supply	110V/60HZ, 220V/50HZ		
Dimension(L*W*H)	710mmx840mmx1140mm		
Packing size(L*W*H)	890mmx960mmx1400mm		
Net weight	280kg		

### Description

- ◆ The max speed is 25000rpm, and max RCF is 64983xg
- ◆ Imported compressor unit with Non-CFC.refrigerant. It measures up to environmental standards.
- ◆ The machine is programmable The operation data can be stored automatically
- ◆ The real-time conversation of Speed and RCF is convenient for operation
- ◆ It has 10 files of acceleration and deceleration level for your choice.


### Rotor-CFGR-22BP/21BP Accessories Center

	<p>NO.1</p> <p>Capacity:1.5ml/2.2ml×36</p> <p>Max Speed:22000r/min</p> <p>RCF:52000×g</p> <p>Adapters:0.2ml、 0.5ml</p>		<p>NO.1</p> <p>Capacity: 10ml×16</p> <p>Max Speed: 22000r/min</p> <p>RCF: 52000×g</p> <p>Adapters: 1.5ml、 5ml</p>
	<p>NO.1</p> <p>Capacity:5ml×16</p> <p>Speed: 22000r/min</p> <p>RCF:52000×g</p> <p>Adapters:0.5ml、 1.5ml</p>		<p>NO.2</p> <p>Capacity:10ml×18</p> <p>Speed: 21000r/min</p> <p>RCF: 50400×g</p> <p>Adapters:1.5ml、 5ml</p>
	<p>NO.3</p> <p>Capacity: 50ml×6</p> <p>Speed: 20000r/min</p> <p>RCF:43000×g</p> <p>Adapters:10ml、 20ml</p>		<p>NO.4</p> <p>Capacity: 50ml×8</p> <p>Speed: 18000r/min</p> <p>RCF:35047×g</p> <p>Adapters:10ml、 20ml</p>



<div>No.5</div> 	<div>NO.5</div> <div>Capacity: 20ml×12</div> <div>Speed: 16500r/min</div> <div>RCF:31100×g</div> <div>Adapters:5ml、 10ml</div>	<div>No.6</div> 	<div>NO.6</div> <div>Capacity: 15ml×32</div> <div>Speed: 16000r/min</div> <div>RCF:30940×g</div> <div>Adapters:5ml、 10ml</div>
<div>No.7</div> 	<div>NO.7</div> <div>Capacity: 70ml×6</div> <div>Speed: 15000r/min</div> <div>RCF:25700×g</div>	<div>No.8</div> 	<div>NO.8</div> <div>Capacity: 100ml/85ml×8</div> <div>Speed: 14000r/min</div> <div>RCF:26952×g</div> <div>Adapters:10ml、 20ml</div> <div>It is customizable</div>
<div>No.9</div> 	<div>NO.9</div> <div>Capacity: 250ml×6</div> <div>Speed: 12000r/min</div> <div>RCF:22470×g</div> <div>Adapters:50ml、 100ml</div> <div>It is customizable</div>	<div>No.10</div> 	<div>NO.10</div> <div>Capacity: 300ml×6</div> <div>Speed: 11000r/min</div> <div>RCF:19650×g</div> <div>Adapters:50ml、 100ml</div> <div>It is customizable</div>
<div>No.11</div> 	<div>NO.11</div> <div>Capacity: 500ml/400ml×6</div> <div>Speed: 9000r/min</div> <div>RCF:14400×g</div> <div>Adapters:50ml、 100ml、 250ml</div> <div>It is customizable</div>	<div>No.12</div> 	<div>NO.12</div> <div>Continuous Flow Rotor</div> <div>Capacity: 1000ml</div> <div>Speed: 14000r/min</div> <div>RCF:21500×g</div> <div>Standard flow:200-600ml/min</div> <div>Material:Aluminum alloy Stainless Steel</div>
<div>No.13</div> 	<div>NO.13</div> <div>Continuous Flow Rotor</div> <div>Capacity: 3000ml</div> <div>Speed: 8000r/min</div> <div>RCF:9500×g</div> <div>Standard flow:200-800ml/min</div> <div>Material:Aluminum alloy Stainless Steel</div>	<div>No.14</div> 	<div>NO.14</div> <div>Capacity: 600ml×6</div> <div>Speed: 7000r/min</div> <div>RCF:9100×g</div> <div>Adapters:50ml、 100ml、 250ml</div> <div>It is customizable</div> <div>This rotor applies to CFGR-22BP only</div>

Rotor-CFGR-25BP Accessories Center


<div>No.1</div> 	<div>NO.1</div> <div>Capacity:5ml×10</div> <div>Max Speed:25000r/min</div> <div>RCF:64983×g</div> <div>Adapters:0.5ml、 1.5ml</div>	<div>No.1</div> 	<div>NO.1</div> <div>Capacity: 1.5ml/2.2ml×24</div> <div>Max Speed: 25000r/min</div> <div>RCF: 64983×g</div> <div>Adapters: 0.2ml、 0.5ml</div>
<div>No.2</div> 	<div>NO.2</div> <div>Capacity:10ml×16</div> <div>Speed: 23000r/min</div> <div>RCF: 60900×g</div> <div>Adapters:1.5ml、 5ml</div>	<div>No.3</div> 	<div>NO.3</div> <div>Capacity:50ml×8</div> <div>Speed: 18000r/min</div> <div>RCF: 40930×g</div> <div>Adapters:10ml、 20ml</div>
<div>No.4</div> 	<div>NO.4</div> <div>Capacity: 250ml×6</div> <div>Max Speed: 14000r/min</div> <div>Max RCF: 30200×g</div> <div>Adapters: 50ml 100ml</div> <div>It is customizable</div>	<div>No.5</div> 	<div>NO.5</div> <div>Capacity: 500ml/400ml×6</div> <div>Speed: 10000r/min</div> <div>RCF:17800×g</div> <div>Adapters:50ml、 100ml、 250ml</div> <div>It is customizable</div>
<div>No.6</div> 	<div>NO.6</div> <div>Capacity: 1000ml×4</div> <div>Speed: 7000r/min</div> <div>RCF:9980×g</div> <div>Adapters:100ml、 250ml、 300ml、 500ml</div> <div>It is customizable</div>	<div>No.7</div> 	<div>NO.7</div> <div>Continuous Flow Rotor</div> <div>Rotor Capacity: 1000ml</div> <div>Max Speed: 16000r/min</div> <div>Max RCF: 28100×g</div> <div>Standard flow: 200-600ml/min</div> <div>Material: Titanium alloy</div>
<div>No.8</div> 	<div>NO.8</div> <div>Continuous Flow Rotor</div> <div>Rotor Capacity: 3000ml</div> <div>Max Speed: 10000r/min</div> <div>Max RCF: 14800×g</div> <div>Standard flow: 200-800ml/min</div> <div>Material: Titanium alloy</div>		

# Micro Centrifuge, Refrigerated, High-Speed

CFGR-B16.5B CFGR-17B



Microcomputer control  
LCD screen(CFGR-B16.5B)  
LCD large touch screen(CFGR-17B)  
It has 9 files of acceleration and deceleration level for your choice.  
Pre-programmed option and memory storage function.

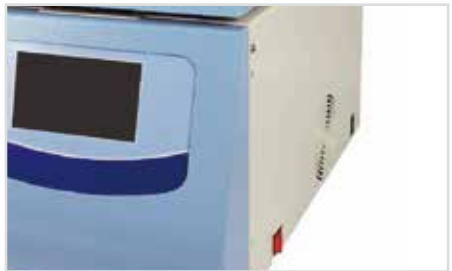

New electronical lock ensure the safety spin.  
It has over-speed safety device, over-temperature safety device and automatic alarm device.

## Features:

This multipurpose centrifuge has advanced and intelligent technology.



Rotor automatic recognition (CFGR-17B).



## Description

The Benchtop micro high-speed refrigerated centrifuge is small in size and low in noise. There are not only micro rotors but also PCR strip tube rotors. It is suitable for a small amount of centrifugation in hospitals at all levels, scientific research units, and laboratories of colleges and universities.

## Specifications

Model	CFGR-B16.5B	CFGR-17B
Max speed	16500r/min	17000r/min
Max RCF	21532×g	
Max capacity	1.5ml/2.2ml×36	
Speed accuracy	± 30r/min	
Time setting	1min~99h 59min	
Temperature setting	-20 ~ +40 ℃	
Temperature accuracy	±1 ℃	
Compressor unit	French Tecumseh Compressor Unit R134a	
Noise	<65db(A)	
Power supply	AC110V/60Hz AC220V/50Hz	
Dimension(L×W×H)	280mm×540mm×300mm	
Packing size(L×W×H)	480mm×670mm×585mm	690mm×400mm×430mm
Net weight	30kg	

# High Speed Refrigerated Centrifuge

CFGR-B16B



## Description

It is suitable for experiments in biology, medicine, agriculture and other fields, and is the first choice for genetic gene, protein nucleic acid PCR experiments.

## Specification

Model	CFGR-B16B
Max. Speed	16500r/min
Max. RCF	21380×g
Max.Capacity	4×100ml
Speed Accuracy	±20r/min
Time Setting	Timing centrifugation: 1min~99 min59sec / Continuous centrifugation: Hold
Temperature Control Range	-20℃~40℃
Temperature Control Accuracy	±1℃
Compressor	Imported high-performance compressor unit, CFC-free refrigerant
Power Supply	AC 220V 50Hz 15A
Dimensions(L*W*H)	350×662×367mm
Package Dimension (W*D*H)(mm)	900×440×550mm
Net Weight	50kg

## Advantages



- ◆ **Display:**  
5-inch high-definition touch screen, easy to operate and intuitive display;
- ◆ **Scheme:**  
15 groups of programs can be stored for users to use
- ◆ **Performance:**  
AC variable frequency motor, high speed control precision, imported environmental protection compressor
- ◆ **Convenience:**Free switching of speed and RCF



- ◆ **Safety Protection:**  
Automatically identify 7 different rotors to eliminate potential safety hazards caused by user misoperation (Optional function)
- ◆ **Control:**  
It has 9 files of acceleration and 10 files of deceleration level, which can effectively prevent secondary suspension and have a good centrifugal effect.



- ◆ **Safety:**  
There are various protections such as overspeed, door protection, imbalance protection, etc. to ensure the safety of human and machine
- ◆ **Particularity:**  
Special air duct to ensure the rotor works under normal temperature
- ◆ **Speciality:** Airtight rotor, effectively prevent aerosols

## Rotor(optional)

Rotor Type	Max Speed(rpm)	Max RCF(g)	Max Capacity	Tube Size(mm)
Angle Rotor	16500	18400	12×1.5/2ml	Φ10×42
Angle Rotor	15000	21380	24×1.5/2ml	Φ10×42
Angle Rotor	13000	19270	32×1.5ml	Φ10×42
Angle Rotor	12000	15370	8×15ml	Φ16×102
Angle Rotor	12000	10100	12×5ml	Φ14×54
Angle Rotor	12500	16060	12×10ml	Φ16×87
Angle Rotor	12000	15130	6×50mL (round bottom)	Φ29×105
Angle Rotor	12000	15130	6×50mL (tip bottom)	Φ29×105
Angle Rotor	10000	10620	4×100mL	Φ38×125
Swing Rotor(microplate)	4000	2000	2×2×48 well	



# High Speed Refrigerated Centrifuge, Benchtop

CFGR-B18B



### Description

It is widely used in agriculture, medicine, food hygiene, biopharmaceuticals, bioengineering, cell biology and biochemistry, etc. It is suitable for the separation and purification of microbial cells, cell proteins, mold and immunity.

### Specification

Model		CFGR-B18B
Max. Speed		18500r/min
Max. RCF		23800×g
Max. Capacity		4×100mL
Motor		AC frequency conversion motor
Speed Accuracy		±30r/min
Time Setting	Timed centrifugation	1min~99 min59sec
	Continuous centrifugation	Hold
Temperature Setting		-20℃~+40℃
Temperature Accuracy		±1.0℃
Power Supply		AC220±22V 50/60Hz 16A
Noise		< 55dB(A)
Dimensions(L×D×H)		350×662×352(mm)
Net Weight		50kg



### Advantages

- ◆ 5-inch high-definition touch screen, easy to operate and intuitive display
- ◆ 15 groups of programs can be stored for users to use;
- ◆ AC variable frequency motor, high speed control precision, imported environmental protection compressor
- ◆ Free switching of speed and RCF
- ◆ Automatically identify 9 different rotors to eliminate potential safety hazards caused by user misoperation (Optional function)
- ◆ It has 9 files of acceleration and 10 files of deceleration level, which can effectively prevent secondary suspension and have a good centrifugal effect.
- ◆ There are various protections such as overspeed, door protection, imbalance protection, etc. to ensure the safety of human and machine
- ◆ Low noise:  
The noise is close to silent at the highest speed;
- ◆ Sealed rotor for effective protection against aerosol.

### Rotor(optional)

Rotor Type	Max Speed(rpm)	Max RCF(g)	Max Capacity	Tube Size(mm)
Angle Rotor	13500	12830	48×0.5mL	Φ8×32
Angle Rotor	18500	23800	12×1.5/2mL	Φ10×42
Angle Rotor	15000	21530	24×1.5/2mL	Φ10×42
Angle Rotor	13500	12830	12×5mL	Φ13×53
Angle Rotor	12500	16060	12×10mL	Φ16×83
Angle Rotor	13000	18040	8×15mL	Φ17×121
Angle Rotor	13000	17760	6×50mL	Φ29×120
Angle Rotor	13000	17760	6×50mL(falcon tube)	Φ29×120
Angle Rotor	11000	12850	4×100mL	Φ37.9x119
Swing Rotor(microplate)	4000	2000	2×2×48well	



# High Speed Refrigerated Centrifuge, Benchtop

CFGR-B20B



The real-time conversation of Speed and RCF is convenient for operation.

It has self-locking device, over-speed safety device, over-temperature safety device, imbalance safety device and automatic alarm device.

It has 9 files of acceleration and deceleration for your choice.



## Specification

Microcomputer control, DC brushless motor, stable operation, low noise, high speed accuracy.

Touching panel, programmable operation. The operation parameters can be set according to demands and stored automatically .

LED or LCD display, user-friendly interface, simple and convenient operations.

Model	CFGR-B20B
Max speed	20000r/min
Max RCF	27800×g
Max capacity	100ml×4
Speed accuracy	± 30r/min
Time setting	1min~99h 59min /1min~99min
Temperature setting	-20 ~ +40 ℃
Temperature accuracy	±1 ℃
Compressor unit	R404A
Noise	<65dB(A)
Power supply	AC110V/60Hz AC220V/50Hz
Dimension(L*W*H)	600mm×470mm×330mm
Packing size(L*W*H)	720mm×610mm×430mm
Net weight	50kg

## Accessories Cente

	<p>NO.1</p> <p>Capacity: 1.5ml/2.2ml×12</p> <p>Speed:20000r/min</p> <p>RCF:27800×g</p> <p>Adapters:0.2ml、 0.5ml</p>		<p>NO.2</p> <p>Capaty:1.5ml/2.2ml×24</p> <p>Speed:16000r/min</p> <p>RCF:23755×g</p> <p>Adapters:0.2ml、 0.5ml</p>
	<p>NO.3</p> <p>Capacity: 5ml×10</p> <p>Speed: 16000r/min</p> <p>RCF:17280×g</p> <p>Adapters:0.5ml、 1.5ml</p>		<p>NO.3</p> <p>Capacity: 5ml×12</p> <p>Speed: 16000r/min</p> <p>RCF:17280×g</p> <p>Adapters:0.5ml、 1.5ml</p>
	<p>NO.4</p> <p>Capacity: 2×48 well</p> <p>Speed:3000r/min</p> <p>RCF:1400×g</p>		<p>NO.5</p> <p>Capacity:0.5ml×36</p> <p>Speed:13000r/min</p> <p>RCF:16760×g</p>
	<p>NO.5</p> <p>Capacity:0.5ml×48</p> <p>Speed:13000r/min</p> <p>RCF:16760×g</p>		<p>NO.5</p> <p>Capacity:10ml×12</p> <p>Speed:13000r/min</p> <p>RCF:16760×g</p> <p>Adapters:1.5ml、 5ml</p>
	<p>NO.5</p> <p>Capacity:15ml×8</p> <p>Speed:13000r/min</p> <p>RCF:16760×g</p> <p>Adapters:1.5ml、 5ml</p>		<p>NO.6</p> <p>Capacity: 50ml×6</p> <p>Speed:12000r/min</p> <p>RCF:13000×g</p> <p>Adapters:15ml、 20ml</p>
	<p>NO.6</p> <p>Capacity: 100ml×4</p> <p>Speed:12000r/min</p> <p>RCF:13000×g</p> <p>Adapters:10ml、 20ml</p>		<p>NO.7</p> <p>Capacity: 10ml×4</p> <p>Speed:6000r/min</p> <p>RCF:3200×g</p>

# High speed Refrigerated Centrifuge

CFGR-B21B




### Description

It is suitable for experiments in biopharmaceuticals, pharmaceuticals, cell biology and other fields, for the isolation and purification of microbial organisms, cellular proteins, mycobacteria and immune.


### Advantages



- ◆ **Display:**  
5-inch high-definition touch screen, simple operation, intuitive display
- ◆ **Program:**  
15 groups of programs can be stored for users to use
- ◆ **Control:**  
It has 9 files of acceleration and 10 files of deceleration level , which can effectively prevent secondary suspension and have a good centrifugal effect

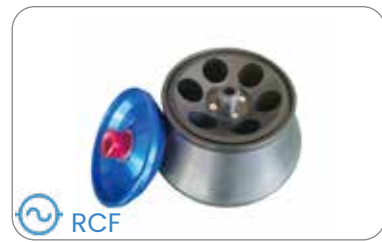

- ◆ **Security:**  
Automatic identification of 9 different rotors, eliminate the user misuse of security risks (Optional function)
- ◆ **Performance:**  
AC frequency conversion motor, high precision speed control
- ◆ **Convenience:**  
Free switching of speed and RCF

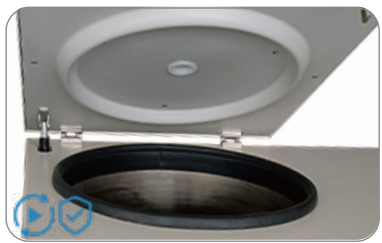

- ◆ **Safety:**  
There are various protections such as overspeed, door protection, imbalance protection, etc. to ensure the safety of human and machine
- ◆ **Particularity:**  
Special air duct to ensure the rotor works under normal temperature;
- ◆ **Speciality :** Airtight rotor, effectively prevent aerosols.

### Specification

Model	CFGR-B21B
Max. Speed	21000r/min
Max. RCF	29828×g
Max.Capacity	4×750ml
Speed Accuracy	±30r/min
Time Setting	1min~99 min59sec Continuous centrifuge : Hold
Temperature Control Range	-20℃~40℃
Temperature Control Accuracy	±1℃
Compressor	Imported high-performance compressor unit, CFC-free refrigerant
Power Supply	AC220±22V,50/60Hz,16A or AC110±20V,50/60Hz,32A
Noise	≤60dB(A)
Dimensions(L*W*H)	720×743×410mm
Net Weight	110Kg
Package Dimension (W*D*H)(mm)	960*810*590

### Rotor(optional)

Rotor Type	Max Speed(r/min)	Max RCF(×g)	Max Capacity	Tube Size(mm)
Angle Rotor	21000	26750	18×0.5ml	Ø8×32
Angle Rotor	21000	29828	12×1.5/2ml	Ø10×42
Angle Rotor	16500	24890	24×1.5/2ml	Ø10×42
Angle Rotor	15000	25650	32×1.5/2ml	Ø10×42
Angle Rotor	15000	24270	48×1.5/2ml	Ø10×42
Angle Rotor	16500	19170	12×5ml	Ø13×53
Angle Rotor	15000	23120	12×10ml	Ø16×83
Angle Rotor	15000	23640	8×15ml	Ø17×121
Angle Rotor	14000	22022	12×15ml	Ø17×121
Angle Rotor	15000	23640	6×50ml	Ø29×120
Angle Rotor	12000	15610	8×50ml	Ø29×120
Angle Rotor	12000	15465	4×100ml	Ø37.9×119
Angle Rotor	10000	11808	6×100ml	Ø37.9×119
Swing Rotor	4200	3500	4×250ml	Ø29×120
Swing Rotor	4000	3040	4×500ml	Ø80×137
Swing Rotor	4000	2810	4x8x15ml	Ø17x121
Swing Rotor	4000	2810	4×100ml	Ø37.9×119
Swing Rotor	4000	3180	4×750ml	Ø99×137
Swing Rotor(microplate)	4000	2300	2×2×96well	

# Microcentrifuge

CFG-Mini4B    CFG-Mini6B



## Description

- ◆ The patent of electrostatic technology, operation with ultra low noise.
- ◆ Microcomputer control, DC brushless motor, stable operation.
- ◆ The machine is durable, safe and reliable.

## Specifications

Model	CFG-Mini4B	CFG-Mini6B
Speed Centrifuges	Low Speed Centrifuges	
Max speed	4000r/min	6000r/min
Max RCF	900×g	2000×g
Max capacity	0.2ml×2×8    1.5ml/0.5ml/0.2ml×6	
Noise	<48dB(A)	
Power supply	110V/60Hz 220V/50Hz	
Dimension(LxWxH)	189mm×161mm×122mm	
Packing size(LxWxH)	330mm×250mm×210mm	
Net weight	1kg	

# Micro Centrifuge, Benchtop, Low Speed

CFG-Mini6R



## Description

CFG-Mini6R-centrifuge standard configuration includes two rotors:

- ◆ 8x1.5ml rotors max accommodate 8x 1.5/2.0ml centrifuge tubes; if use randomly equipped with 0.2ml or 0.5ml tube sets, 0.2ml or 0.5ml tubes also can be used on this product.
- ◆ 4x8x0.2ml rotors accommodate 4x8 x0.2ml PCR special tubes.

Two kinds of rotor both can be used in experiments on micro centrifugation, cell separation and quickly separating from the test tube wall and etc.

## Specification

Model	CFG-Mini6R
Dimension	160×150×125mm
Capacity(standard rotor)	8×1.5/2.0/0.5/0.2ml
Speed	6000rpm
Fuse	0.5A    250V
Power	≤50W
Max RCF	2000xg
Input Voltage	AC100-240V, 50/60Hz
Capacity(8-strip rotor)	4×8×0.2 ml
Weight	0.9kg

## Description

- ◆ Small volume, light weight
- ◆ 1.5ml rotors accommodate 8x1.5/2.0/0.5/0.2ml centrifugal test tubes.
- ◆ 8-place rotors accommodate 32x0.2ml centrifugal test tubes.
- ◆ Use flip type switch function, automatically stop when open the cover, the cover is made by composite material which in not easy broken.

# Mini Centrifuge

CFG-Mini4Y-E    CFG-Mini6Y-E



Unique Snap-on design



Easy operation



Stronger centrifuge force



Clamshell switch



## Description

It is equipped with two centrifugal rotors and multiple test tube sleeves for 2.0mL/1.5mL/0.5mL/0.2mL centrifuge tubes and 8× 2× 0.2mL PCR tube strip. Fully transparent round top cover with multi rotor equipped, and an open lid pause function and electronic timing fully embodied the design concept of humanization.

## Application

- Serum extracted from whole blood
- Supernatant extraction of various samples
- Separation of blood cells
- Microbial sample processing
- Rapid sedimentation of samples
- Partition centrifugation for PCR experiments

## Features

- Exquisite appearance and compact size.
- Large radius with 8-hole rotor design, 1.5-fold stronger centrifugal force.
- Top cover opens automatically for easy one-handed operation.
- Snap-on design for easy rotor replacement and removal.
- Noise reduction function, near silent operation.

## Specifications

Model	CFG-Mini4Y-E	CFG-Mini6Y-E
Speed	4000rpm	6000rpm
Max.RCF	860xg	2000xg
Capacity	Centrifuge Tube: 8×2.0mL/1.5mL/0.5mL/0.2mL PCR tube strips:8×2×0.2mL	
Timer	—	
Sound Emission	≤ 45dB	
Electricity	220V/110V, 50-60Hz	
Dimension(W*D*H)	160*176*121mm	
N.W./G.W.	1.6kg/2.1kg	
Shipping Dimension (L*W*H)	290*230*210mm	

## Equipped accessories

Model		
Strip rotor		For 0.2mL×16 tubes
8-position rotor		For 1.5/2.0ml×8 tubes
Tube adaptor		For 0.5ml tubes



# Micro Centrifuge, Palm type

CFG-Mini5D    CFG-Mini7M



## Specifications

Model	CFG-Mini5D	CFG-Mini7M
Max. Speed	5000rpm	7000rpm
Max. RCF	1360×g	2680×g
Rotor Capacity	0.2/0.5/1.5/2.0mL×8;32×0.2ml	0.2/0.5/1.5/2.0mL×8; 32×0.2mL
	PCR strips or 4x0.2ml PCR 8 strips	PCR strips or 4×0.2mL PCR 8 strips
Run Time	Continuous operation	
Driving Motor	DC motor	
Power	AC100V-240V/50Hz/60Hz 20W	
Noise Level	≤45dB	
Dimension [D×W×H]	160mm×170mm×122mm	
Weight	0.5kg	
Certification	—	



## Description

- ◆ Ideal for microfiltration and quick spin-down application.
- ◆ Easy to operate. Lid close, it begin to rotate.
- ◆ Compatible with 2mLx8 and PCR8x4 rotors.
- ◆ Quiet running, noise level ≤45Db.
- ◆ Quick-change rotor without any tool.
- ◆ Accelerates and brakes in seconds.
- ◆ Available in two colors i.e., green, blue.
- ◆ Safe, enduring and robust rotor with clamp locking design.

## Available adapters



Cat. No. 19400029  
0.2mL rotor adapter  
8pcs/pk



Cat. No.19400026  
0.5mL rotor adapter  
8pcs/pk

## Available rotors



Cat. No.19201164  
Max. speed: CFG-Mini5D:5000rpm, CFG-Mini7M:7000rpm  
Max. RCF: CFG-Mini5D:1360xg, CFG-Mini7M:2680xg  
Rotor capacity: 2mL/1.5mL×8,0.2mL×8,0.5mL×8  
Rotor material: High strength plastic



Cat. No.19201165  
Max. speed: CFG-Mini5D:5000rpm, CFG-Mini7M:7000rpm  
Max. RCF: CFG-Mini5D:1360xg, CFG-Mini7M:2680xg  
Rotor capacity: 0.2 ml×32 PCR strips, 0.2 ml×4 PCR 8 strips  
Rotor material: High strength plastic

# Mini Centrifuge

CFG-Mini7E



## Application

This centrifuge is ideal for fast centrifugation, sample microfiltration, cell isolation and many other routine laboratory procedures.



## Features


- Small volume,high capacity, low wind resistance,low heat rise.
- Easy to operate with dual start/stop function.Close lid for a spin speed up to 7000 rpm.
- Ultra-quiet, low vibration, smooth and quiet operation (sound emission≤50dB).
- Safe, enduring and robust rotor with clamp locking design.
- Sophisticated design, quick-change rotor without any tool.
- Accelerates and brakes in seconds.
- Compatible with 2mLx8 and PCR8x4 rotors.

## Specification

Model	CFG-Mini7E
Max.Speed	7000rpm
Max.RCF	2680×g
Rotor Capacity	0.5/1.5/2.0mL×8;
	0.2mL×32 PCR tubes;
	0.2mL×4 PCR 8 strips;
Running Time	Continuous operation
Driving Motor	DC motor
Sound Emission	≤50dB
Electricity	AC100-240V, 50/60Hz, 20W
Ambient Temperature and Humidity	5-40℃, 80%RH
Dimension(D*W*H)	156*166*121mm
N.W./G.W.	0.5kg/2kg
Package Dimension(W*D*H)(mm)	300*240*230mm

# Mini Centrifuge

CFG-Mini7YS

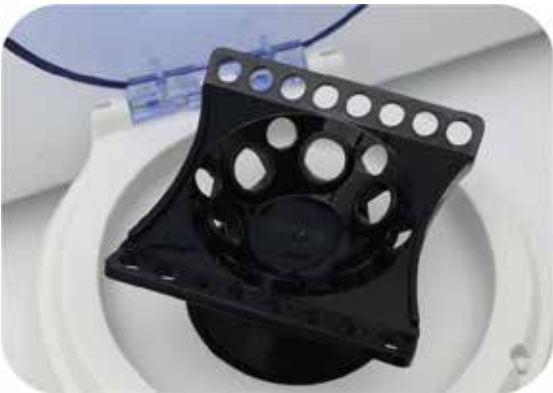

Combination rotor



## Description

It is designed with a "three in one" combination rotor, which suitable for centrifuge tubes 6\*1.5/2.0mL or 6\*0.5mL or 16\*0.2mL and 8\*2 \*0.2mL PCR tube strips. It can centrifuge a variety of centrifuge tubes without replacement of rotor, which is convenient for users and saves time.



## Features

- Micro DC motors and carbon fiber rotors.
- Ultra-low noise running, almost silent.
- High strength housing for fall and impact resistance.
- Clamshell switch and stop automatically when opening.
- Three choices of speed (4000rpm,6000rpm,7000rpm) and timer functions meet different experimental requirements.



Three choices of speed, with timer function



Combination rotor

## Specifications

Model	CFG-Mini7YS
Speed	4000rpm,6000rpm&7000rpm adjustable
Max.RCF	960xg(4000rpm)/2000xg(6000rpm)/2900xg(7000rpm)
Capacity	Centrifuge tube: 6x1.5mL/2.0mL,6x0.5mL,16x0.2mL PCR tube strips:2x8x0.2mL
Timer	1s-99min59s
Sound Emission	≤ 45dB
Electricity	220V/110V, 50~60Hz
Dimension(W*D*H)	160*176*135mm
N.W./G.W.	1.6kg/2kg
Package Dimension (W*D*H)(mm)	280*230*210mm

Microcentrifuge

CFG-Mini10B



Description

- ◆ The patent of electrostatic technology,
- ◆ operation with ultra low noise.
- ◆ Microcomputer control, DC brushless motor, stable operation.
- ◆ The machine is durable, safe and reliable.

Specifications

Model	CFG-Mini10B
Speed Centrifuges	High Speed Centrifuges
Max speed	10000RPM
Max RCF	5000×g
Max capacity	0.2ml×2×8 1.5ml/0.5ml/0.2ml×6
Noise	<48dB(A)
Power supply	110V/60Hz 220V/50Hz
Dimension(LxWxH)	189mm×161mm×122mm
Packing size(LxWxH)	330mm×250mm×210mm
Net weight	1kg

Micro centrifuge, high speed

CFG-Mini15R



Features:

- ◆ LCD provides a clear indication of time and rpm or RCF.
- ◆ RPM/RCF setting as required.
- ◆ The rotor is made of nylon material, with corrosion resistance, mini-
- ◆ mizes the temperature increases during long run at high speed.
- ◆ Acceleration and deceleration in just 14 seconds.
- ◆ Safety operation: rotor imbalance diagnostic; automatic stop.
- ◆ Motor overheating protection function.
- ◆ A separate momentary short button permits instant spin downs.
- ◆ Less sample heating (only 5°C after 30min, at max speed).
- ◆ A brushless motor provides noiseless performance and long service.

Specifications

Model	CFG-Mini15R
Capacity	12×1.5/2.0ml centrifuge tubes
Speed range	500~15000rpm
RCF range	16~15080xg
Timing range	15sec~99min59sec/∞
Acceleration	14sec(0~15000rpm)
Deceleration	14sec(15000~1000rpm)
Rotor imbalance diagnostic	Yes
Motor overheating protection function	Yes
Power	120W
Voltage	DC24V/5A
Dimension	255x194x140mm
Weight	2.3kg



Description

CFG-Mini15R High-speed Mini-centrifuge is a compact centrifuge capable of achieving centrifugal speeds up to 15000rpm, approximately 15080g. It is used for extracting RNA/DNA samples, sedimentation of biological components, biochemical and chemical analysis of micro samples. Automatic imbalance switch-off and locking of lid provide safe operation. The rotor accepts 1.5 to 2.0ml tubes directly, as well as 0.5ml and 0.2ml tubes with optional adapters.



# Mini Centrifuge, High Speed

CFG-Mini15D



### Description

- ◆ Speed up to 15000rpm (15100×g)
- ◆ Brush-less DC motor drive quickly to the target speed
- ◆ Quiet working, Low noise ≤54dB
- ◆ CFG-Mini15D is proven by IEC/EN 61010-1
- ◆ CFG-Mini15D passed the rigorous explosion-proof test according to IEC/ E/V 61010-2-20.

### Specifications

Model	CFG-Mini15D
Max. Speed	15000rpm(500-15000rpm), increment: 100rpm
Max. RCF	15100×g, increment: 100×g
Speed Accuracy	±20rpm
Rotor Capacity	0.2mL/0.5mL/1.5mL/2mL×12
Run Time	30sec-99min/Continuous
Acceleration/Braking time	11s ↑ /9s ↓
Driving Motor	Brushless DC motor
Safety Devices	Door interlock, Over-speed detection, Over-temperature detection, Automatic internal diagnosis
Power	Single-phase, AC100V-240V, 50Hz/60Hz, 3A 100W
Noise level	≤54dB
Dimension[D×W×H]	255mm×245mm×140mm
Weight	6kg
Other functions	Speed/RCF switch, Short-time run function, sound-alert function



### Available rotors

	Cat. No.19500001 0.2mL rotor adapter 24 pcs/pk		Cat. No.19500002 0.5mL rotor adapter 24 pcs/pk
---	--	---	--

### Available rotors

	Cat. No.19400010 for CFG-Mini15D only Capacity:2×12 Hole diameter: 11.2mm Hole depth: 39mm Max. tube length: 47mm Max. speed: 15000rpm Max. RCF: 15100×g Rotor capacity: 2mL/1.5mL×12,0.2mL×12,0.5mL×12 Rotor material: High strength plastic Available rotor adapters: A02P2, A05P2
---	--

# Microplate Centrifuge, PCR

CFG-MP2R



### Features:

- ◆ Easy to use, real-time display of all operating information.
- ◆ Countdown mode support.
- ◆ DC brushless motor, low noise, small interference, maintenance-free.
- ◆ When opening the cap will automatically stop running.
- ◆ Fast acceleration from standstill to maximum speed fully in just 10sec.
- ◆ Braking time is short, from the highest speed to a complete standstill in just 4sec.



### Description

CFG-MP2R Centrifuge for Microplates is designed for quick spins of samples in PCR plates. Primarily designed for use with 96 or 384 well plates and small volumes, it accepts skirted, non skirted and semi-skirted styles.

### Specifications

Model	CFG-MP2R
Rotating speed	2200~2800rpm
Timing range	15sec ~1min59sec
Max(RCF)	550xg
Acceleration time	≤10sec(0 to 2800rpm)
Brake time	≤4sec(2800rpm to 0)
Lid Open Auto Stop	Yes
Short Run	Yes
Capacity	2 PCR plates
Power	45W
Voltage	AC110~220V/50~60Hz
Fuse	250V/3A Φ5×20
Dimension	260x240x226mm
Weight	3.3Kg
Package Dimension (W*D*H) (mm)	340*300*310
G.W.(kg)	4.5

# Cyto centrifuge

CFG-3B (Cyto)



## Description



Cyto Centrifuge widely used in immune hema-  
tology laboratories, for erythrocyte serological  
experiments, antigens, antibodies and the  
determination of the results of the Coombs test,  
etc., is a hospital blood bank at all levels, the  
experiment Rooms, blood stations, medical  
schools and medical research institutions  
essential equipment.

A cytocentrifuge is a machine that concentrates  
cells from a liquid into a thin layer on a micro-  
scope slide. It is used in clinical medicine and  
biological research to examine cells in body  
fluids, in cytopathology, hematology, and  
microbiology. They can analyze samples such  
as cerebrospinal fluid, and fine needle aspirates.

## Specifications

Model	CFG-3B (Cyto)
Max speed	3000r/min
Max RCF	730xg
Max capacity	12x2ml
Speed accuracy	± 30r/min
Time setting	1min~99min
Noise	<65dB(A)
Power supply	110V/60Hz ,220V/50Hz
Dimension(LxWxH)	410mmx490mmx310mm
Packing size(LxWxH)	500mmx580mmx400mm
Net weight	22kg

## Description



Microcomputer control, DC brushless motor, stable operation, Low noise  
and high speed accuracy.



Touch panel, programmable operation, operation data can be set  
according to demands and stored automatically.

LED display, user-friendly interface, simple and convenient operations.


The real-time conversation Of Speed and RCF is convenient for operation.

It has self-locking device, lid safety device, over-speed safety device, and  
automatic alarm device, etc.

## Accessories Center



NO.1  
Capacity: 2ml×12  
Max Speed:3000r/min  
RCF:730×g

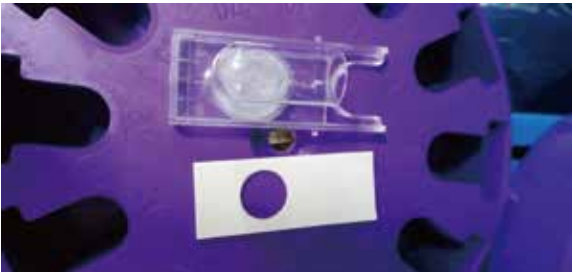

# Clinical Centrifuge, PRP

CFG-4.5D(PRP)



Features:

- ◆ Passed the explosion-proof test / MCA test according to IEC/EN61010-2-20;
- ◆ Passed EN61010-2-101: 2 0 0 2 particular requirements for In-Vitro diagnostic (IVD) medical equipment;
- ◆ Maintenance-free brush-less DC motor.



- ◆ Max speed:4500rpm;
- ◆ Rotor speed can be set in RPM/RCF;
- ◆ Automatic lid-lock release after running;



- ◆ 3 pre-loaded programs for fast operation;
- ◆ 9 programs for customization can be stored in memory;
- ◆ Powerful CPU for easy operation of speed, time and all other parameters;
- ◆ Easy-to-read processing display and sound alert;



Specification

Model	CFG-4.5D(PRP)
Speed Range	300-4500rpm, increment:10rpm
Max. RCF	2490xg, increment: 10g
Speed accuracy	±10rpm
Rotor capacity	8x15ml,12x10mL/7mL/5mL
Run Time	30sec-99min
Motor	Brushless DC motor
Display	LCD
Preloaded Program	PRP:3480rpm, 5mins, PRF:2690rpm, 7mins, CGF: Step1 2700rpm 2mins, Step2 2400rpm 4mins Step3 2700rpm 4mins, Step4 3000rpm 3mins,
Custom Programs Memory	9 programs (6 steps for each program)
Safety Devices	Door interlock, Overspeed detector, Automatic internal diagnosis
Noise	≤56dB
Power	Single-phase, 100V-240V,50Hz/60Hz, 3A,70W
Dimension[W×D×H]	301X354X217mm
Weight	6kg
Package Dimension[W×D×H]	480X430X360mm
G.W.	8.5kg
Advanced features	Speed/RCF switch; sound-alert function





Blood cell washing centrifuge

CFG-4B (BW)



Application

- ◆ It has microprocessor control, DC brush-less motor.
- ◆ The SERO rotor is used for erythrocyte washing.
- ◆ The HLA rotor is for lymphocyte washing.




Accessories Center Rotor

Rotor	Key	RCF	Centrifugal Time	Use
HLA Rotor For Lymphocyte Washing	1	2000×g	180s	Lymphocyte separation incubated cell separation
	2	1000×g	3s	Hematob last exenterate(thrombin disposal)
	3	1000×g	60s	Lymphocyte Washing
SERO Rotor For Erythrocyte Washing	1	500×g	60s	Blood grouping, image of hemagglutination reaction
	2	1000×g	15s	Cross matching, and the testing of antistaphyloysin
	3	1000×g	60s	Hematocyte washing, the extraction of serum and plasma

Specifications

Model	CFG-4B (BW)	
Rotor type	HLA Rotor	SERO Rotor
Rotor Capacity	(0.25~1ml)×12	7ml×12
Max RCF	2000×g	1000×g
Drive	Microcomputer control, brushless DC motor drive	
Time range	Programmed timekeeping	
Noise	<60dB(A)	
Power supply	110V/60Hz 220V/50Hz	
Dimension(L×W×H)	330mm*420mm*280mm	
Package Dimension(W*D*H)(mm)	520*440*390	
Net weight	14kg	

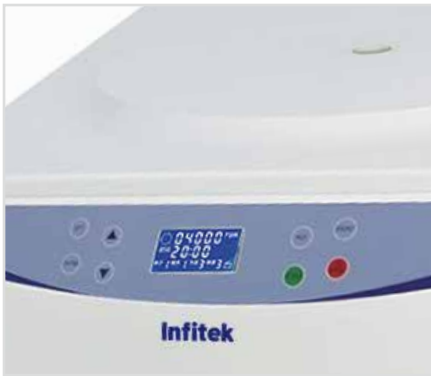

Technical performance

Microcomputer control, DC brush-less motor, stable operation, low noise and high speed accuracy.

Touch panel, programmable operation, operation data can be set according to demands and stored automatically.

LED display, user-friendly interface, simple and convenient operations.

The real-time conversation of speed and RCF is convenient for operation.

Self-locking device, lid safety device, over-speed safety device, and automatic alarm device, etc.

# Oil Test Centrifuge

CFG-4B(Oil)      CFG-5B(Oil)



## Technical performance



Microcomputer control,electronic lock and AC variable-conversion motor, stable operation, low noise and high speed accuracy, which delivers high torque, Touch panel, programmable operation, operation data can be set according to demands and stored automatically. LED or LCD display, user-friendly interface, simple and convenient operations.

The real-time conversation of speed and RCF is convenient for operation. It has self-locking device, lid safety device, over-speed safety device, over-temperature safety device, imbalance safety device and automatic alarm device. It has 10 files of acceleration and deceleration for your choice.

## Specifications

Model	CFG-4B(Oil)	CFG-5B(Oil)
Max speed	4000r/min	5000r/min
Max RCF	4690×g	3850×g
capacity	100ml/200ml×4	10ml×36
Fitting Tubes Length	<195mm	≥195mm
Speed accuracy	± 50r/min	
Time setting	1min~99min	
Temperature Setting	20~80 ℃	
Temperature Accura	± 2 ℃	
Noise	<65dB(A)	
Power supply	220V/50Hz	
Dimension(LxWxH)	650mmx710mmx1100mm	
Packing size(LxWxH)	740mmx830mmx1300mm	
Net weight	140kg	

# Gel Card Centrifuge

CFG-4Y(BT)    CFG-4AY(BT)



12 cards



24 cards

## Features

- Brushless motor, free maintenance, no powder pollution.
- Microcomputer control, digital display of time, speed and RCF, easy to operate.
- Special gradient centrifugation technology, and different gradients can be designed according to different reagent requirements.
- Regular centrifugation program, customers can press the button to choose the required one.
- 10-speed acceleration and deceleration control, the last program used when starting up.
- The silent electronic door lock is easy to use and has an emergency door opening function.
- Door lock, over-speed, imbalance automatic protection and fault self-diagnosis.

## Application

It is widely used in the test of blood group serology, blood type, micro-column agglutination, immunodetection and etc.



## Rotors

Model	CFG-4Y(BT)	CFG-4AY(BT)
Rotor Type	Swing Rotor	Swing Rotor
Max. Speed	4000rpm	3000rpm
Max. Capacity	12 cards	24 cards
Max. RCF	1480×g	1192×g

## Specifications

Model	CFG-4Y(BT)	CFG-4AY(BT)
Max. Speed	4000rpm	3000rpm
Max. RCF	1480×g	1192×g
Max.Capacity	12cards	24cards
Speed Accuracy	±10r/min	
Timer	1s~99min59s	
Sound Emission	≤55dBA	
Electricity	AC 110V/220V, 50/60Hz	
External Dimension	450*320*225mm	500*360*250mm
N.W./ G.W.(kg)	15kg/18.5kg	18kg/21kg
Package Dimension (W*D*H) (mm)	580*430*350mm	615*450*390mm

# PRP Centrifuge

CFG-5B(PRP)    CFG-4B(PRP)




## Specifications

Model	CFG-5B(PRP)	CFG-4B(PRP)
Max speed	5000r/min	4000r/min
Max RCF	4100xg	2220xg
Max capacity	10ml /50ml swing rotor	7ml /15ml/20ml/50ml angle rotor
Speed accuracy	± 30r/min	
Time setting	1min~99min	
Noise	<65dB(A)	
Electricity	110V/60Hz 220V/50Hz	
Dimension(LxWxH)	410mmx490mmx310mm	330mmx420mmx280mm
Package Dimension (W*D*H)(mm)	500mmx580mmx400mm	520mmx440mmx400mm
N.W.(kg)/G.W.(kg)	22kg	14 kg/16kg


## Technical performance

Microcomputer control, DC brushless motor, stable operation, low noise and high speed accuracy.  
LED or LCD display. user-friendly interface, simple and convenient operations.  
Various of PRP kit is available.  
Special program is made for PRP kit.  
The real-time conversation Of Speed and RCF is convenient for operation.  
It has self-locking device, lid safety device, over-speed safety device, and automatic alarm device, etc.

### Rotor:

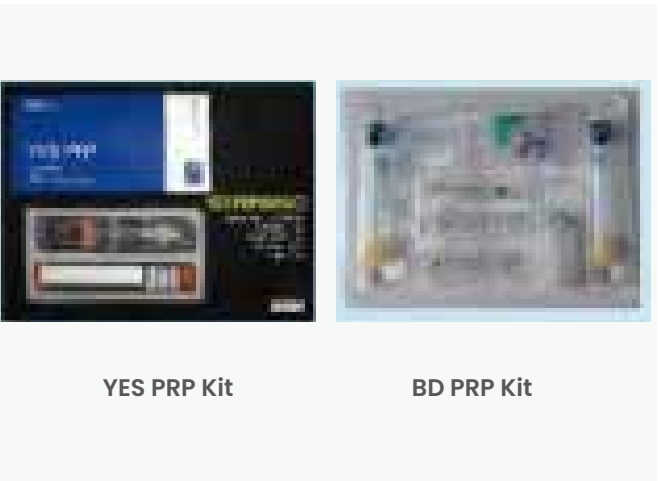

## The PRP operation Demo:

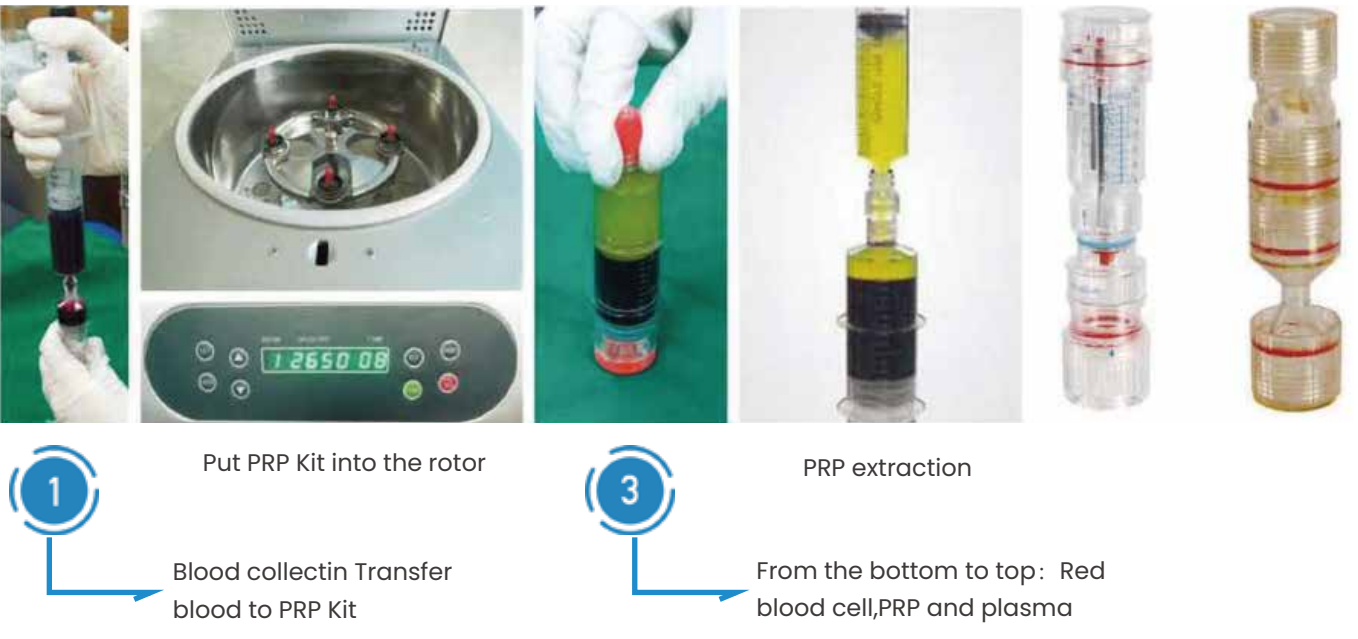



# 1.5ml Centrifuge Tube

CFG-5D (Oil)



## Description

It is an ideal equipment for the oil extraction industry and petroleum scientific research units to measure the water content of the produced fluid (i.e. the water-containing crude oil) in the oil field production process.

## Standard Swinging Rotor

Model	CFG-5D (Oil)
Rotor	Swinging Rotor
Swing Rotor	
Max.Speed	2000rpm
Max.RCF	957×g
Max. Capacity	4×100mL

## Features

- The high-definition touch screen "intelligent system" displays the display interface at the same time, in addition to the rotation speed, running time, temperature, and acceleration and deceleration gears. It also displays the currently selected rotor specification and model, maximum rotation speed and maximum centrifugal force, door cover opening and closing status, real-time date and time, etc.
- Adopt large torque brushless frequency conversion motor, easy to operate; maintenance-free, no dust, fast lifting speed, greatly improving work efficiency.
- It adopts a ring heater, which heats quickly and has uniform temperature. It has temperature control and constant temperature functions to meet the temperature requirements of the centrifuge in the petroleum industry.
- Automatic electric induction door lock, emergency door opening function; automatic protection for overspeed and imbalance; the body is made of high-quality steel structure, built-in stainless steel explosion-proof protective inner sleeve, stainless steel centrifugal chamber, three-layer protection, safe and reliable.
- A spring taper sleeve is used to connect the rotor and the spindle. Loading and unloading the rotor is fast and simple, non-directional, safe and reliable, and more convenient to use.
- The centrifuge bucket is made with a special process and is designed to reduce vibration according to the characteristics of silicate glass. The bottom of the alloy aluminum cup is made of PA polymer pad to effectively protect the glass tube during the centrifugation process. If necessary, a small amount of hot water can be injected for balancing or protecting the glass tube.
- It is equipped with a fault self-diagnosis system, which can automatically detect various faults such as over-speed, over-temperature, imbalance, door cover self-locking, etc., and display fault information in the display window to improve the safety performance of the instrument.

## Specification

Model	CFG-5D (Oil)
Max. Speed	5000r/min
Max. RCF	4730×g
Max. Capacity	4×100mL
Speed Accuracy	±10r/min
Timing Range	1s~99h59min59s
Temperature Range	RT.+10℃~80℃
Temperature Accuracy	±2℃
Sound Emission	≤60dB(A)
Electricity	AC220V, 50Hz, 10A
External Dimension	700*500*400mm
N.W.(kg)/G.W.(kg)	67kg/90kg
Package Dimension (W*D*H)(mm)	890*590*570mm(wooden box)

# Microhematocrit Centrifuge

CFG-12Y(HCT)



- Max. Speed: 12000rpm
- Max. RCF: 15800×g
- Max. Capacity: 24pcs capillary



## Description

- It is used for the determination of blood hematocrit, the separation of trace blood and trace solutions.

## Features

Adopt large torque brushless frequency conversion motor, maintenance-free, no dust, fast lifting speed.

Using induction electronic door lock, with emergency door opening device; door lock detection, overspeed, unbalance and other self-inspection and protection, safe and reliable.

Using microcomputer processor for precise control, LCD liquid crystal display, can store and call 10 sets of common programs.

10 acceleration rates and 10 deceleration rates for users to choose to achieve the best centrifugal effect.

The whole machine is all-steel structure, 304 stainless steel centrifugal chamber, multi-layer explosion-proof design, safe and stable; three-stage vibration reduction, automatic balance function.

Suitable for any laboratory, it occupies a small area, greatly saves limited laboratory space, and has a low opening height. Also suitable for laboratory benchtops with shelves.

## Specification

Model	CFG-12Y(HCT)
Max. Speed	12000rpm
Max. Capacity	24pcs Capillary
Max. RCF	15800×g
Sound Emission	≤58dBA
Timing Ranging	1s ~ 99min59s
Speed Accuracy	±10rpm
Electricity	AC110/220V, 50/60Hz
External Dimension(W*D*H)	350×270×210mm
N.W./G.W.	13kg, 16kg
Package Dimension(W*D*H)	430*350*290mm

## Rotor

Rotor No.	No.05193
Rotor Type	Hematocrit rotor
Max. Speed	12000rpm
Max. Capacity	24 pieces vessel
Max. RCF	15800×g

# Microhematocrit Centrifuge

CFG-12D    CFG-14D



### CFG-12D Features

- Speed range of 500-12000 rpm.
- Precise control of speed and time.
- Maintenance-free brushless DC motors.
- Door interlock



### CFG-14D Features

- Speed range of 200-12000rpm Precise and independent control of speed and time.
- Easy operation with intuitive menu and LCD display.
- Maintenance-free brushless DC motor.
- Pulse operation for fast and convenient quick spins.
- Advance features include speed/RCF switch; short-time run function;audible alert function.
- Safety features include door interlock, overspeed detector; over-temperature detector; automatic internal diagnosis and automatic rotor identification.



### Available rotors



Cat. No.19400047  
CFG-14D & CFG-12D  
Max. speed: 12000rpm  
Max. RCF: 13680×g  
Rotor capacity: capillary tubes×24  
Rotor material: High strength aluminum



### Specifications

Model	CFG-12D	CFG-14D
Speed Range	500-12000rpm, increment: 100rpm	200-12000rpm, increment: 10rpm
Max. RCF	13680×g	13680×g
Speed Accuracy	±100	±20
Run Time	10sec-99min/Continuous	30sec-99min/Continuous
Motor	Brushless DC motor	Brushless DC motor
Display	LCD	LCD
Safety Devices	Door interlock	Door interlock, Overspeed detector; Automatic internal diagnosis, Automatic rotor identification
Acceleration/Braking time	40s ↑ 40s ↓	30s ↑ 30s ↓
Power	Single-phase, 200V-240V,50Hz/60Hz, 5A; 380W	Single-phase, 200V-240V,50Hz/60Hz, 5A; 100V-120V,50Hz/60Hz, 5A 160W
Dimension[W×D×H]	280mm×364mm×213mm	280mm×364mm×274mm
Weight	8.5kg	10.5kg
Advanced features	Speed/RCF switch; Short-time run function; sound-alert function	Speed/RCF switch; Short-time run function; sound-alert function



# Microplate Centrifuge

CFG-M2Y



## Specifications

Model	CFG-M2Y
Max.Speed	2800rpm
Max.RCF	600xg
Capacity	8×0.2ml PCR tube strips/0.2ml PCR tubes / 2×96-well PCR plate
Max.Rotor Radius	63mm
Acceleration Time	≤ 15s
Deceleration Time	6s
Timer	1s~99s (Short Spin)
Voltage	DC 24V, 2A
Power	48W
Sound Emission	≤ 55dB
Dimension(W*D*H)	220*245*200mm
N.W./G.W.	2.5kg/4.5kg
Package Dimension(W*D*H)(mm)	400*380*300



Equipped with tube adaptors.

## Features:

- ◆ Applies to kinds of PCR plates with/without skirt.
- ◆ Two operating modes: inching and timing.
- ◆ Instantaneous acceleration to 2800rpm and stop in 6 s with electronic brake.
- ◆ Wall droplets rapidly cleared.
- ◆ Efficiently improves PCR experiment result.
- ◆ Top cover opening 95° for easy operation.

## Description

CFG-M2Y Microplate Centrifuge is an instantaneous centrifuge specially designed for microplate. It is suitable for: 0.2ml PCR tube strip,8×0.2ml PCR tube strips, 96-well or 384-well PCR plates, various standard PCR microplates (including skirted).

# 1.5ml Centrifuge Tube

MCT-001-150 CT-002-15 CT-002-50

## Centrifuge Tube

Centrifuge tubes are made of high-quality polypropylene (PP) and are mainly used for sample storage and centrifugation.



MCT-001-150



CT-002-15



CT-002-50

## Key Features

Made of high-quality polypropylene (PP) material;  
RCF: 12000×g/13000×g;  
The tube body scale is clear;  
It can withstand 121℃/15psi high temperature an  
high-pressure sterilization;  
No DNase, no RNase, no pyrogen;  
Sterilized with gamma rays.



MCT-001-150



CT-002-15



CT-002-50

## Specifications

Model	MCT-001-150	CT-002-15	CT-002-50
Item description	1.5ml centrifuge tube	15ml centrifuge tube	50ml centrifuge tube
Unit	box	bag	bag
Package info	500 tips/box, 10 boxes/carton	25 tips/bag, 20 bags/carton	25 tips/bag, 20 bags/carton



# Multi-Purpose Centrifuge

CFG-6D



### Description

- ◆ CFG-6D Multi-Purpose Low-speed Centrifuge is ideal for the centrifugation of samples in clinical chemistry, cytology, research laboratories, industrial laboratories, etc.
- ◆ This centrifuge is suitable for tubes with caps, blood collection or urine tubes. Swing-out bucket rotors and adapters can be compatible with standard tubes up to 100mL at low speed.



### Features:

- ◆ Speed range: 300- 6000rpm.
- ◆ Maximum capacity: 100 ml×4.
- ◆ 9 acceleration/10 brake speed settings to ensure optimal separation.
- ◆ A wide range of rotors optional (Angle Rotor and Swing Rotor).
- ◆ Automatic rotor identification.
- ◆ Timers can be set up to 99 min or HD for continuous running.
- ◆ Pulse key for quick spin function.
- ◆ 9 procedures stored in memory makes the operation much simplified.
- ◆ Maintenance-free brushless DC motors.



### Specification

Model	CFG-6D
Speed range	300-6000rpm increment:10rpm
Max. RCF	4020×g
Speed accuracy	±20rpm
Max. Capacity	100mLx4
Run Time	30sec-99mins/continuous
Motor	Brushless DC
Display	LCD
Program Memory	9
Safety Devices	Door Imbalance protection Over speed & Over temperature detection
Acceleration/Deceleration	9 ↑ /10 ↓ steps
Power	660W; Single-phase AC220V-240V, 50Hz/60Hz, 6.3A; AC110V-120V,50Hz/60Hz,10A
Dimension[W×D×H]	445mm×579mm×269mm
Weight	36 kg
Advanced features	speed/rcf switch; Rotor identification

### Available rotors



CAT. NO. 19400062  
CFG-6D  
Max. speed: 4000rpm  
Max. RCF: 2200×g  
Rotor capacity: Micro-plates 384-PCR/96-PCR/Elisa plates×8pcs; Deep well plates×4pcs  
Rotor material: stainless steel body and aluminum buckets



CAT. NO. 19400040 (round bottom)  
CFG-6D  
Max. speed: 4500rpm  
Max. RCF: 3210xg  
Rotor capacity: 15mL×30  
Rotor material: aluminum body and stainless steel  
adapter Bio-safe (Bio-sealing): Yes

Available rotors



CAT. NO. 19400036  
CFG-6D  
Max. speed: 6000rpm  
Max. RCF: 4020×g  
Rotor capacity: PCR 8 trips×12  
Rotor material: aluminum  
Biosealing: Yes



CAT. NO. 19400034  
CFG-6D  
Max. speed: 6000rpm  
Max. RCF: 4020×g  
Rotor capacity: 2mL×30  
Rotor material: aluminum  
Biosealing: Yes



CAT. NO. 19400037  
CFG-6D  
Max. speed: 6000rpm  
Max. RCF: 4020×g  
Rotor capacity: 2mL×60  
Rotor material: aluminum  
Biosealing: Yes



CAT. NO. 19400038 (cone button)  
CFG-6D  
Max. speed: 6000rpm  
Max. RCF: 4020×g  
Rotor capacity: 50mL×6 or 15mL×6  
Rotor material: aluminum  
Biosealing: Yes



CAT. NO. 19400035 (cone botton)  
CFG-6D  
Max. speed: 6000rpm  
Max. RCF: 4020×g  
Rotor capacity: 5mL×18  
Rotor material: stainless steel  
body and aluminum buckets  
Biosealing: Yes



CAT. NO. 19400039 (round botton)  
CFG-6D  
Max. speed: 5000rpm  
Max. RCF: 3960×g  
Rotor capacity: 50mL×8 or  
15mL×16  
Rotor material: aluminum body  
and stainless steel adapter



**Uncapping block**





CAT. NO. 19500025  
15ml conical tube adapter,  
MOQ 8 Pcs (optional)



CAT. NO. 19400041 (Standard accessory)  
for CFG-6D  
Max. speed: 4000rpm  
Max. RCF: 2950×g  
Rotor material: stainless steel body and adapter

Accessory specifications

	 19400045		 19400044			 19400043		 19400042			
bucket	x 4										
tube	x 36		x 16			x 8	x 4	x 4	x 4	x 8	x 20
Nominal volume	3~7mL		10mL	12mL	15mL	50mL	100mL	85mL	50mL	15mL	3~7mL
φ × L mm	13x75	13x100	16x100	17x105	17x120	29.5x100	38x108	38x104	29.5x100	17x120 13x100 13x75	13x100 13x75
tube											
adapter	with plug					 A50V	 A100P80		 A50V	 A100P15	 A100P10
Package	36					8	4		4	8	4
Tubes per rotor	36	36	16	16	16	8	4	4	4	8	20
Radius(cm)	14	16.5	15.9	15.9	15.9	15.9	15.9	15.9	15.9	15.1	14.7
Max RCF (g-force)	2500	2950	2840	2840	2840	2840	2840	2840	2840	2700	2630

Rotor	Capacity	Hole Diameter (mm)	Hole Depth (mm)	Max. Tube Height (mm)	Max. Speed (rpm)
CAT. NO. 19400034	2ml×30	11.2	39	43	6000
CAT. NO. 19400037	2ml×60	11.2	39	43	6000
CAT. NO. 19400038	50ml×6	31	87.8	118	6000
CAT. NO. 19400035	5ml×18	17.5	51	56	6000
CAT. NO. 19400039	50ml×8	35	85.8	118	5000
	15ml×16	17.5	98	123	
CAT. NO. 19400039	15ml×30	17.5	98	123	4500
CAT. NO. 119400062	Micro platex8/ Deep well platex4	-	-	-	4000

# Vacuum Centrifugal Concentrator

VCC-2000



### Application

Suitable for concentration of immunoglobulin, concentration of drug metabolites, SPE solid phase extraction, pre-processing and post-processing of liquid chromatography, ADMET/toxicology, polymer chemistry, DNA/RNA purification and concentration, oligomer synthesis, forensic science/drug abuse testing, general laboratory enrichment, etc.

### Description

- This series of products has the function of quickly and safely evaporating water and organic solvents in the sample. The processed samples can be conveniently used for various qualitative and quantitative analysis - chemistry, biochemistry, biological analysis, immune screening, food safety, residue analysis, etc.

### Features

- Using single-chip microcomputer with self-developed control board and high-torque brushless DC motor, the operation is stable and the noise is low, providing a comfortable laboratory environment.
- Vacuum sample heating (vacuum pump is optional).
- LCD touch screen monitor with TFT true color.
- With over-temperature warning function.
- Uniform heating method is adopted, with fast heating and high temperature control accuracy, and the chamber can be heated to 60 °C.
- The centrifuge chamber is made of alloy aluminum, and the surface treatment process of anodic electrophoresis can resist the corrosion of most chemical reagents and solvents.
- Maintenance-free non-contact drive rotation system.
- Polymethyl methacrylate transparent cover for easy monitoring of the concentration process.
- Intelligent microprocessor control and simple and direct operation interface.
- Concentration time: 1min-99h59min, can be used with cold trap.
- Split design, free assembly and collocation, flexible and convenient.
- Low-temperature concentration avoids sample loss, denaturation, activity decline, and oxidation.
- High-throughput can process dozens of samples at the same time without cross-contamination.
- The sample has no foam generation and no loss. Safe and easy way to recover solvent from cold traps.

### Specification

Model	VCC-2000
Rotor Capacity	6×250mL/6×50mL
	12×10mL/62×1.5mL
	2×48well/2×96well
Speed	2000r/min
Max.Power	1.5kW
Max Current	7A
Ambient Temperature	0℃~+35℃
Sound Emission	≤50dB (A)
Temp.Control Range	RT. ~ +60℃ or without heating
Final Vacuum Degree	0.1mbar
Vacuum Interface	Φ10mm
Electricity	AC 220V/50Hz
Dimension(L*W*H)	600*540*360mm
N.W./G.W.	38kg/52kg
Shipping Dimension(L*W*H)	770*680*440mm



Rotor Parameters









	Figure	Parameter
Angle Rotor	 62×1.5mL	Max.speed:1500r/min Rotor Item No.: JZZ-026-0152 (2000)
	 12×10mL	Max.speed:2000r/min Rotor Item No.: JZZ-026-0275
	 6×50mL	Max.speed:2000r/min Rotor Item No.: JZZ-026-0001
Microplate Rotor	 2×48well	Max.speed:2000r/min Rotor Item No.: SPZ-026-0183



	Figure	Parameter
Angle Rotor	 12×10mL	Max.speed:1500r/min Rotor Item No.: JZZ-022-0129
	 6×50mL	Max.speed:1500r/min Rotor Item No.: JZZ-022-0131
	 6×250mL	Max.speed:2000r/min Rotor Item No.: JZZ-026-0134 Can be matched with 6×2×50mL/6×5×20mL adapter
Microplate Rotor	 2×96well	Max.speed:2000r/min Rotor Item No.: SPZ-026-0239

